# Siange

HIGH PERFORMANCE COMPONENTS



RaceStrange

# GET NOTICED, GET CONNECTED, GET STRANGE









**GOT STRANGEP** Well now you can look Strange with Strange apparel. Visit us at Strangeeng.net and gear up with one of our latest designs to show the world just how Strange you are.

# **Does STRANGE run in your family? Are you #StrangeGEN?**

- 1. Visit us at www.strangeeng.net/strangegen
- 2. Send us photos and the story of your STRANGE family
- 3. Get cool stuff in return

Follow us on social media and hang on while we guide you through the world of Strange Racing and Strange Events.











Coming Soon!
Like car parts? How about low cost car parts?
The Strange Back Room is just the place for you.

# CONTENTS

#### Axle Packages/Components Axle Packages-Alloy...... 12-17 Axle Packages-Pro Race..... 20-27 Axle Packages-2 Piece...... 22-23 Axle Order Form..... 6-7 C-clip Axles...... 13 C-Clip Eliminators...... 30-31 Bearings...... 31 Retainer Plates...... 31 Wheel Studs...... 28-29 **Bolt-in Strange Housings** Application Guide...... 97 Dragster Housings...... 84-87 Ford 9"...... 81-83 Ford 9" Ultra Fab...... 82-83 GM 12 Bolt......92-93 S60 / Dana 60...... 90-91 Housing Ends...... 94-95 9" Ultra 4-Link...... 88-89 9.75" Independent...... 108-109 **Brake Kits/Components** Brakes Technical...... 126-127 Front Carbon Brake Kits...... 146-147 Rear Carbon Brake Kits.....148-149 Front Steel Brake Kits...... 132-139 Rear Steel Brake Kits...... 130-131,140-141 Rear Stainless Brake Kits...... 130,140-141 Rear Street Brake Kits.....152-153 Drum Brake Kits...... 153 Brake Pads...... 145,149 Brake Rotors...... 144, 149 Calipers & Caliper Kits...... 142-145,149 Caliper Rebuild Kits.....149 Master Cylinders......150 Pressure Gauge......151 Proportioning Valve...... 151 Residual Valves...... 151 Lines & Fittings...... 151-152 Differentials Dana / Ford / GM / Mopar..... 46-48 **Driveshafts & Components** Driveshafts...... 174-176 Magnetic Sensor Collars...... 179 Pinion Yokes...... 178-179 Transmission Yokes...... 176-177 Tubing & Weld Ends......176 U-Joints & U-Bolts......176 Floater Kits/Components Drag Race & Pro Touring......118-121

#### Ford 8.8" & Mustang Parts/Packages

Axle Packages-Alloy	. 14-15
Packages with Spool	16-17
Axle Packages-Pro Race	20-21
Packages with Spool	25
C-Clip Axles	13
C-Clip Eliminators	30
Differentials & Spools	46-49
Gear Sets & Install Kits	40
Housing Ends	94-95
Pinion Yokes	.178
Rear Covers & Main Caps	.50
Shocks & Struts	.162-165

#### Ford 9" Centers/Housings

S-Series Iron Centers 62-63	
Pro Iron Centers 64-65	
12 Blt Drop-Out Centers 67-69	
L/W Aluminum Centers 67-69	
HD Aluminum Centers70-73	
Ultra Case Centers74-77	
Billet Aluminum Centers 78-79	
9" Housings80-83	
9" Ultra Fab Housing 82-83	
Dragster Housings 84-87	
Ultra 4-Link Housing88-89	
Complete Bolt-in Rear Ends 97-107	1

#### Ford 9" Components

S-Series Iron Cases	52
Pro Iron Cases	53
12 Blt Drop-Out Cases	55
L/W Aluminum Cases	54
HD Pro Aluminum Cases	54,58
Ultra Cases	55,59
Billet Aluminum Cases	56-57
Pinion Supports	60-61
Differentials	46-48
Spools	49
Gear Sets	36-37
Installation Components	38-39
Pinion Yokes	178
Magnetic Sensor Collars	179

#### Gear Sets/Installation Kits

Dodge / Mopar	34-35
Ford	36-40
GM	41-45
Gear Ratio Formulas	33
Lighten Gear Service	32
Micro Blue Service	33

#### GM 10 &12 Bolt Parts/Packages

Axle Packages-Alloy	14
Packages with Spool	16
Axle Packages-Pro Race	20-21
Packages with Spool	24,26
C-Clip Axles	13
C-Clip Eliminators	31

# GM 10 &12 Bolt Parts/Packages Continued

Differentials & Spools	41-45 179 92-93 .116-117 .51 159-161 .165 94-95
Live Axle Assemblies	180-181
Rear Covers & Main Caps	: 50-51
\$60/ Dana 60/ Mopar 8	3/4″
Axle Packages-Alloy	. 16 . 21-22 . 26-27 90-91 . 110-115 . 46-49 . 34-35 . 178 . 50 . 161-162
Spools	
Dana / Ford / GM / Mopar.	49
Steering Components	
Steering boxes	
Quick Release Hubs	
Suspension	
Aluminum Struts	
Aluminum GT Struts	
Ultra Struts Mono Tube Ultra Struts	
Altered Ultra Struts	
Camaro Struts	
Mustang Shocks & Struts	
Aluminum Bolt-in Shocks	158-163
Aluminum Coil-Over Shocks	
Illiano Coll Consultation	
Ultra Coil-Over Shocks	. 156-157
Koni Coil-Over Shocks  Hyperco & Knight Springs	. 156-157 . 154-155

Spanner Wrench......155

Terms & Conditions..... 4

#### **TERMS**

Orders may be shipped Certified Check, VISA, MASTER CARD, AMERICAN EXPRESS, OR DISCOVER CARD. Minimum order is \$10.00.

#### **CLAIMS**

Claims for damages in shipping, open or sealed, are to be made to freight forwarder. Claims for shortages must be made directly to Strange Engineering within 5 days of receipt.

#### **RETURNS**

Special order parts are non-returnable. No returns will be accepted without prior authorization. Please contact a Strange Engineering associate for a Returned Merchandise Authorization number. Returns must be in new condition. Any part that has been installed or used will not be credited. All returns are subject to a 20% handling charge (minimum \$10) and return freight must be prepaid.

#### **PRICING**

Prices are subject to change without notice.

#### **DISCLAIMER OF WARRANTY**

Strange Engineering reserves the right to make changes in design and to add to or improve on its product without incurring any obligation to install the same on products previously manufactured.

Purchasers using Strange Engineering racing components and equipment as well as any and all inventory services, acknowledge that due to the differing conditions and circumstances under which all equipment and parts are installed and used, purchasers are not relying on Strange Engineering's skills or judgments to select or furnish the proper part or equipment. Purchasers expressly affirm they are relying upon their own skill or judgment to select and purchase suitable goods.

Strange Engineering makes no warranties whatsoever, expressed or implied, oral or written, to purchasers. There is no warranty of merchantability made to purchasers. Strange Engineering further excludes any implied warranty of fitness with respect to racing, equipment, any and all inventory and service.

#### **AXLE REPLACEMENT GUARANTEE**

Strange Alloy (induction hardened) 33 and 35 spline axles and Strange Pro Race Axles (thru-hardened) with 33, 35 (excluding gun-drilled) and 40-splines are guaranteed against spline breakage to the original owner for a period of five years. This replacement policy shall not apply to any product which has been repaired or altered in anyway so as in our judgment affects its performance; nor which has been subject to misuse, abuse, negligence or any other occurrence beyond the control of Strange Engineering. The replacement policy is effective from the invoice shipping date. In no way does Strange Engineering accept responsibility or liability beyond repair or replacement.

#### SPOOL REPLACEMENT GUARANTEE

Strange Pro Race steel spools carry a lifetime replacement policy against breakage to the original owner with proof of purchase. This replacement policy is only valid when the spool is used with Strange or unmodified OEM axles- this is due to irregularly cut and non-involute splines which occur in re-spline and cut spline axles which provide poor spline contact area. This replacement policy shall not apply to any product which has been repaired or altered in anyway so as in our judgment affects its performance; nor which has been subject to misuse, abuse, negligence or any other occurrence beyond the control of Strange Engineering. The replacement policy is not warrantied against excessive run-out due to ring and/or pinion breakage. The replacement policy is effective from the invoice shipping date. In no way does Strange Engineering accept responsibility or liability beyond repair or replacement.

# **BEING STRANGE**

Strange Engineering has more than 50 years of manufacturing experience in the performance industry. Strange has grown from creating products inside a two car garage in the late 50's to an industry leading manufacturing company housed on a 120,000 square foot site. The family owned business is still based on principles the company was founded on- quality product, quality service and a true enthusiasm for the performance industry.



The best tool for the job is the right tool for the job. Strange Engineering prides itself on supplying the best possible product for your particular application. Many years of experience have created different axle designs based on their intended use. After considering the loads and forces that the axle will endure, the right material is chosen along with the proper heat treatment to optimize its characteristics. Since this can not be accomplished by only one type of axle, it has lead to the development of both Pro Race Axles and Alloy Axles. Quality is ensured as all Strange axles are proudly made in the USA by Strange Engineering.

# **PRO RACE** THRU-HARDENED

# MATERIAL

Hy-Tuf ultra strength forged alloy steel

#### **HEAT TREATMENT**

Thru-hardened @ Rc 45-46 Full depth of shaft

#### APPLICATION

**Competitive Drag Racing** 

#### ORIGIN

Hy-Tuf was originated in the class of Ultra-Strength alloys, which was developed for highly stressed landing gear in military aircrafts. The material is a low carbon, high manganese, high-nickel and high molybdenum steel.

#### **PROPERTIES**

Each Pro Race Axle is heat treated in a vertical furnace to a hardness of Rc 45-46. The axle is the same hardness from the center of the shaft to the surface (thruhardened).

The combination of Hy-Tuf and thruhardened heat treatment provides an axle that achieves superior torsional strength and ductility. In addition, thru-hardened Hy-Tuf is ideal for weight saving gundrilled and ultra light axles. More drag racers depend on Strange Hy-Tuf Pro Race Axles than all other brands combined.

Pro Race (thru-hardened) and Alloy (induction hardened) axles are all NHRA & IHRA accepted; however, Strange Engineering maintains the highest standards in the industry for safety and performance. Therefore, we strongly recommend our thru-hardened Pro Race shafts for all competitive drag racing applications.

# **ALLOY**

# **INDUCTION HARDENED**

#### MATERIAL

Modified 1550 premium forged alloy steel

#### **HEAT TREATMENT**

Induction Hardened @ Rc 58-62 Hardness decreases from surface to the axle core

#### APPLICATION

High performance Street and Track

#### ORIGIN

1550 proved to be an excellent material for street applications, but required different properties to be suitable for track use as well. Various modifications were tested until the proper combination resulted in the material use today.

#### **PROPERTIES**

Induction hardening is a process in which an axle is pulled through an electrical coil. The electric coil heats and quenches the shaft. This type of heat treatment is ideal for hardening the case of the shaft while the axle shaft core and flange remain soft, allowing for an extremely ductile axle.

The combination of a premium alloy steel and induction hardening creates an axle which is able to survive the bending loads that are inherent with street use.

Strange Alloy Axles are offered in 28, 30, 31, 33 and 35 spline applications. Shafts up to 31 spline are ideal for street applications with the use of posi-units, Detroit Lockers, and helical gear differentials. The 33 and 35-spline axles are able to withstand even higher torque and bending loads. 35-spline alloy axles are well suited for street and track applications. They can be used with Detroit Lockers, Helical gear differentials, and spools. Spools are for racing applications only and should never be used on the street.

While Strange Alloy Axles are NHRA and IHRA accepted, the Pro Race Axles offer superior torsional and axle flange strength for the ultimate in Drag Race Only applications.



Strange

Strange axles are manufactured to meet each customer's needs. In order for us to produce an optimal axle fit, we have provided the following text and illustrations to assist you with supplying the necessary axle information. Please do not hesitate to call us if you have any questions.

Complete the information for Rear End Housing form if you cannot determine dimension C. The C dimension of an existing axle may be affected by changes to the housing ends, carrier, and brakes. When brakes are changed, so are many of the axle dimensions. Any additional information provided will help ensure a proper fit. Give all the necessary information for existing axles provided everything will remain the same. The facing page has a housing end identification chart as well as common OEM and aftermarket dimensions that can be useful to verify the measurements you are supplying.

## **INFORMATION FOR AXLE ORDER FORM**

- (1) Application Street, Track, Street and Strip, or Drag Race Only
- (2) Carrier Differential or spool, and manufacturer

  The original C dimensions may change if the carrier is replaced
- (3) Number of axle splines
- (4) Bolt Circle See chart
- (5) Tapped for screw in studs (1/2-20 or 5/8-18)
  Only Alloy Axles can be drilled for knurled studs Specify knurl size
- (6) Housing end type Shape may vary- Please verify dimensions
- (7) Type of brakes and manufacturer- Drum, factory disc, or aftermarket Aftermarket brake companies should supply F dimension
- (8) D dimension Axle flange OD is 6.245" unless specified otherwise
- (9) Driver side and passenger side C dimension See axle diagram
- (10) A dimension Brake register See axle diagram
- (11) B dimension Bearing seat See axle diagram
- (12) H dimension Bearing area diameter See axle diagram
- (13) F dimension Brake offset See housing diagram
  B and F are not the same dimension See Notes
- (14) Passenger side housing end to center of pinion Dimension L
- (15) Driver side housing end to center of pinion Dimension O
- (16) Housing end to housing end Dimensions L+0
- (17) Passenger side axle flange to center of pinion Dimension M
- (18) Driver side axle flange to center of pinion Dimension J
- (19) Axle flange to axle flange Dimensions M + J Do not add thickness of brake hat or drum

# **COMMON OEM DIMENSIONS**

Chrysler / Dana / Mopar

A dimension - 2.300" or 2.820"

B dimension - 2.200", 2.312", or 2.562"

F dimension - 2.238, 2.350", or 2.600"

H dimension - 1.563" Bolt circle - 5 on 4 1/2"

Ford

A dimension - 2.430", 2.530", 2.750", 2.780",

2.796", 2.875, or 3.060"

B dimension - 1.875", 2.062", 2.125", 2.250",

2.375" or 2.437"

F dimension - 2.145", 2.332", 2.500", or 2.625"

H dimension - 1.379", 1.400", 1.532", 1.563",

1.626" or 1.773"

Bolt circle - 4 on 4 1/4", 5 on 4 1/2', 5 on 5 1/2"

**General Motors** 

A dimension - 2.780", 2.812", or 3.060"

B dimension - 2.562", C-clip style axle (none)

F dimension - 2.832"

H dimension - 1.379", 1.400", 1.532", 1.563"

1.626, or 1.773"


Bolt circle - 5 on 4 3/4", 5 on 5", 5 on 5 1/2"

#### **Notes:**


- Axle flange to axle flange is measured from the outside face of the axle flanges without any brakes installed.
- If you have listed only housing end to housing end or axle flange to axle flange, please specify pinion offset.
- The B dimension is from the outside face of axle flange to the bearing shoulder machined onto the axle.
- The F dimension is measured from outside face of bare axle flange to the outside face of the housing end.
   Chrysler / Dana / Mopar housing ends do not have an internal step to stop the axle bearing.
   Therefore, the F dimension is obtained with the backing plate and gasket installed or their combined thickness accounted for.
- When upgrading to 35 spline axles in a Ford 9", an aftermarket 3.250" bore case is required.

#### **AXLE FORM**

X	<b>Bolt Circle</b>
2.645"	4 1/2"
2.792"	4 3/4"
2.939"	5"
3.233"	5 1/2"

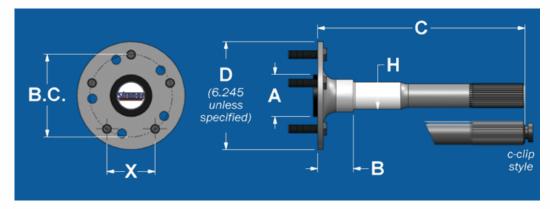

#### **HOUSING FORM**

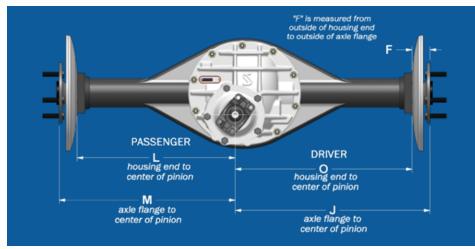



# HOUSING END CHART

#### **Notes:**

(1) FACTORY indicates
OEM style housing ends
that Strange does not
manufacture and are listed
for identification purposes;
however, we do offer c-clip
eliminator kits. C-clip
eliminator kits may require
new axles- call for your
application.

(2) Big Ford or late big Ford OEM housing ends may vary in shape and housing end stud hole size.



# **Low Drag Hub Kit**

This front hub kit is offered to reduce rotational friction in Chevrolet COPO Camaros. In the highly competitive classes that this vehicle competes, it is important to persue every option available to gain an edge. This kit arrives fully assembled and an easy bolt-on installation.

• COPO Camaro

# VILLE DIIANE NII

#### **Front**

- 15-20 Mustang
- 94-04 Mustang
- 91-96 Corvette
- 65-68 Corvette
- 88-98 C10 Truck
- 63-70 C10 Truck
- Lamb struts
- Santhuff struts

#### Rear

- 15-20 Mustang
- 05-14 Mustang
- 10-15 Camaro
- 97-13 Corvette

See Pages 135-138





# **Compact 4-Piston Front Carbon Brake Kit**

- Pro Stock / Pro Mod
- Compact 4-piston billet calipers
- Fixed caliper with free floating pistons
- Maximizes Piston retraction
- Eliminates slider assemblies
- Fits Anglia style Strange strut body (Strange Ultra & Penske)
- Enhanced cold holding capabilities
- Immensley increases brake pad life
- Unique 2-piston design eliminates heat shields



# **Mustang Manual Brake Conversion Kit**

B3359M 1979-1993 Mustang Manual Brake conversion kit. Fits automatic & manual transmission pedal boxes. Includes 1.125" bore aluminum master cylinder, billet aluminum adapter plate, push rod, dust boot, rod end, banjo fittings, and all necessary mounting hardware.



## **Billet Caliners**

Strange 4-piston Billet calipers further increases bridge strength providing a firmer pedal feel and less drag. All four stainless steel pistons are 1.750" and are longer which creates 7% more clamping force and provides more piston stability. Available in black or red.

Strange Low Profile billet calipers are designed with the maximum wheel clearance available. Essential when using some of the latest 15" bead lock wheels, this caliper fits where others don't.



# **Chevy & Ford Truck Housings and Rear Ends Assemblies**

Ford 9"

- 60-72 C10
- 73-87 C10 & K10
- 88-98 C15
- 73-94 Blazer (Full size) 95-99 Tahoe (2 WD)

• 82-03 S10 (2 WD)

- 92-99 Suburban (2 WD)

- 65-72 Ford F100

#### **S60**

- 60-72 C10
- 73-87 C10 & K10
- 73-91 Suburban (2 & 4 WD) 88-98 C15 & K15
  - 73-94 Blazer (Full size) 95-99 Tahoe (2 & 4 WD)
- See Page 97
  - 82-03 S10 (2 WD)
  - 92-99 Suburban (2 & 4 WD)
  - 73-91 Suburban (2 & 4 WD)

  - 65-72 Ford F100



# **Dragster Spindles With Tow Loops**



# **Pro Touring Floater Kit**

With changeable toe-in and camber components

See Page 121

F5012

# **300M Floater Axles**

A modified 4340 steel with silicone, vanadium, higher carbon & molybdenum content. This is a premium material that is suitable for the most severe applications.

See Page 119

# Dragster **FLOATER** Rear End



The Strange modular
4-Link rear is specifically
designed for Dragsters T

designed for Dragsters. The aluminum rear features a lightweight floater design and large 11 50" stainless steel 2-piece for

and large 11.50" stainless steel 2-piece floating brake rotors with maximum clamping force delivered by billet Strange calipers.

See Page 84

# 2 day turnaround

- · Designed for your custom street and hi-performance vehicle
  - · CNC machined from premium forged alloy steel
- Induction hardened to resist bending loads and provide a more flexible axle
  - Radius rings to minimize stress concentrations
- Axles for Dana 60, Ford 8.8", 9", GM 12 bolt, 10 bolt, 57-64 Olds, Mopar 8 3/4"
  - 28, 30, 31, 33, & 35 spline
  - Alloy 35 spline axles designed for your street/strip requirements

**Strange Alloy Axies** are designed to meet the demanding bending loads of street use. Manufactured from premium alloy steel forgings, each alloy axle is induction hardened to its optimal hardness with Strange designed tooling. Alloy axle splines are hobbed to the proper involute spline before heat treatment. The axles are made with a large 1.563" diameter axle bearing area and the shoulder accepts a radius ring that minimizes stress concentrations. A billet aluminum brake register is provided to properly locate the center of your disc or drum brake system.

Alloy axles are offered in 28, 30, 31, 33 and 35 spline applications. Shafts up to 31 spline are ideal for street applications with the use of posi-units, Detroit Lockers, and helical gear differentials. It is always recommended to use the largest shaft as possible. If you own a 9" rear end and are considering purchasing a differential for a OEM case, then you should always upgrade from 28 to 31 spline components. The axles are identical in price and often the differentials are similar in cost. Although our 28 spline Alloy axle is stronger than OEM 28 spline, 31 spline axles are 38% stronger. We strongly recommend an upgrade to 31 spline axles for street applications.

Strange Alloy 33 and 35-spline axles are able to withstand even higher torque and bending loads. 35-spline alloy axles are ideal for street and strip applications and may be used with Detroit Lockers, helical gear differentials and spools. Spools are for Drag Racing only and should never be used on the street.

Strange also offers alloy replacement c-clip style axles for many OEM applications. Call today to discuss your requirements.

#### **STRANGE ALLOY AXLES**

A3100 Strange Alloy induction hardened axles
Ford 28, 31, 33 spline / Mopar 30 spline/GM 30, 33
spline. Drilled and tapped for your choice of bolt
circle- pair....... \$349

A3500 Strange Alloy 35 spline induction hardened axles.

Drilled and tapped for your choice of bolt circlepair....... \$349

A1004 Additional charge for access hole or third bolt circlepair....... \$16



# **STRANGE ALLOY C-CLIP AXLES**

- Manufactured from high strength steel
   Harder surface area than OEM for improved bearing/axle life
  - Deeper case hardening than OEM for superior torsional strength
    - Fully ground bearing surface and radius
  - Drilled for 1/2-20 screw-in studs & OEM press-in studs
     Fits OEM bearing

# **FORD MUSTANG 31 SPLINE C-CLIP AXLES**

P3110 Strange 31spline 8.8" c-clip axles 94-98 0EM Mustang disc applications - pair....... \$250

P3111 Strange 31 spline 8.8" c-clip axles 99-04 OEM Mustang disc applications - pair....... \$250

P3112 Strange 31 spline 8.8" c-clip axles
05-14 OEM Mustang disc applications - pair....... \$284

# **GM 30 SPLINE C-CLIP AXLES**

P3020 Strange 30 spline GM 12 bolt c-clip axles 67-69 Camaro, 65-67 Chevelle, 68-72 Chevy II 0EM drum applications- pair....... \$250

P3026 Strange 30 spline GM 12 bolt c-clip axles 70-72 Camaro, 68-72 Chevelle 0EM drum applications- pair....... \$250



# **C-CLIP AXLE BEARINGS, SEALS & STUDS**

A3120K Ford 8.8" & GM 10 & 12-bolt car

Axle bearing and seal for c-clip axle- pair....... \$54

A3121 Ford 8.8" press-in stud kit - 10 pieces 94-04 Mustang (1/2"-20) .615" knurl....... \$26

A3130 GM press-in stud kit - 10 pieces

Up to 81 car (7/16"-20) .472" knurl....... \$26



# **ALLOY AXLE PACKAGES**

# STRANGE ALLOY AXLE PACKAGES FOR FORD, GM, MOPAR AND MORE...

Alloy axle packages are easily configured to a wide range of applications and are customized for your vehicle. Strange has combined integrated components at money saving prices. As with all Strange packages, Alloy Axle packages are designed to ease installation saving you time & money



P3102	Ford 28 or 31 spline axles, bearings, and 2" or 3" (1/2-20) stud kit\$429
P310258	P3102 with upgrade to 5/8" stud kit\$489
P3104	Ford 28, 31, Chevy or Mopar 30 spline axles, axle bearings, retaining plates, and 2" or 3" (1/2-20) stud kit\$446
P310458	P3104 with upgrade to 5/8" stud kit\$506
P3302	Strange 33 spline axles, bearings, and 2" or 3" (1/2-20) stud kit\$429
P330258	P3302 with upgrade to 5/8" stud kit\$489

P3304	Strange 33 spline axles, bearings, retaining plates, and 2" or 3" (1/2-20) stud kit\$446
P330458	P3304 with upgrade to 5/8" stud kit\$506
P3502	Alloy 35 spline axles, bearings, and 2" or 3" (1/2-20) stud kit\$429
P350258	P3502 with upgrade to 5/8" stud kit\$489
P3504	Alloy 35 spline axles, bearings, retaining plates, and 2" or 3" (1/2-20) stud kit\$446
P350458	P3504 with upgrade to 5/8" stud kit\$506

The Chevy 30 spline axles listed above are NON-c-clip style axles and require aftermarket 3.150" ID housing ends.

# **ALLOY AXLE PACKAGES**



#### FORD 8.8" ALLOY AXLE PACKAGES WITH C-CLIP ELIMINATOR KIT

Strange 8.8" c-clip eliminators feature Timken roller bearings that are ideal for street and constant use

# 86-93 MUSTANG

P3109F86 Ford 28, 31 or Strange 33 spline Alloy axles, c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit

1986-1993 Mustang 8.8" application for OEM drum brakes.....\$450

P3109F8658 With upgrade to A1027 5/8" stud kit......\$510

P3509F86 With 35 spline Alloy axles.....\$450

P3509F8658 With 35 spline Alloy axles and A1027 5/8" stud kit....\$510

1986-1993 Applications can be used with aftermarket disc brake kits that are designed for c-clip eliminator kits

#### 94-04 MUSTANG

P3109F94 Ford 28 or 31 spline Alloy axles, c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit

1994-2004 Mustang 8.8" application for OEM disc brakes - Specify GT or Cobra brakes....\$569

P3109F9458 P3109F94 with upgrade to A1027 5/8" stud kit.....\$629

P3509F9458 P3109F94 with Strange 35 spline Alloy axles and A1027 5/8" stud kit......\$629

OPAX01 Add optional Strange 1994-2004 ABS reluctor rings - pair.....\$89

#### **05-14 MUSTANG**

P3109F05 Ford 31 spline Alloy axles, c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit

2005-2014 Mustang 8.8" application for OEM GT & GT500 disc brakes....\$678

P3109F0558 With upgrade to A1027 5/8" stud kit......\$738

OPAX05 Add optional OEM 2005-2012 ABS reluctor rings - pair.....\$98

2005-2014 kits include billet aluminum caliper mounts - Eliminating modifications that compromise integrity of the OEM mount 5/8" stud kit option limited to A1027 due to clearance requirements for eliminator kits


# **ALLOY AXLE & SPOOL PACKAGES**

# STRANGE 35 SPLINE ALLOY AXLE & SPOOL PACKAGES FOR FORD, GM, MOPAR AND MORE...

Alloy axle & spool packages are easily configured to a wide range of applications and are customized for your vehicle. Strange has combined integrated components at money saving prices. As with all Strange packages, Alloy Axle packages are designed to ease installation saving you time & money



# **ALLOY AXLE & SPOOL PACKAGES**

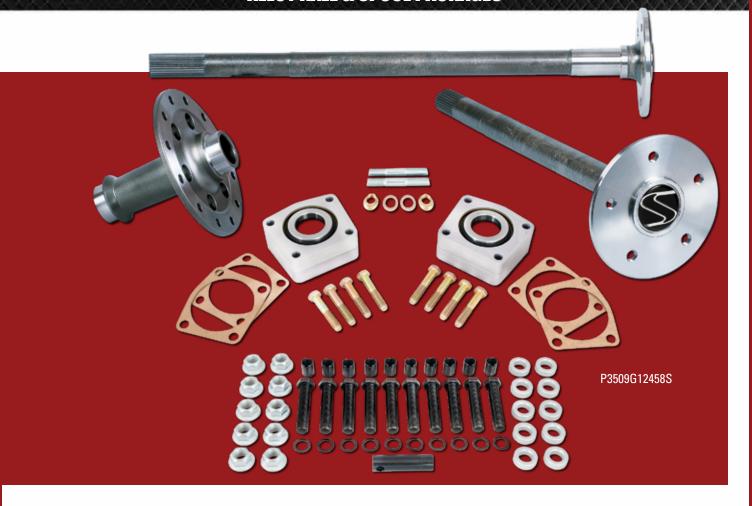

#### FORD 8.8 35 SPLINE ALLOY AXLE & SPOOL PACKAGES WITH C-CLIP ELIMINATOR KIT

P3509F86S Alloy 35 spline axles, lightweight pro steel spool, c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit

1986-1993 Mustang 8.8" application for OEM drum brakes... \$589

1986-1993 Mustang applications can use aftermarket disc brakes kits designed for use with c-clip eliminator kits

P3509F94S Alloy 35 spline axles, lightweight pro steel spool, c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit

1994-2004 Mustang 8.8" application for OEM disc brakes - Specify GT or Cobra brakes...\$710

OPAX01 Add Optional Strange 1994-2004 ABS reluctor rings - pair...... \$89

P3509F05S Alloy 35 spline axles, lightweight pro steel spool, c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit

2005-2014 Mustang application for OEM GT & GT500 disc brakes... \$819

OPAX05 Add optional OEM 2005-2014 ABS reluctor rings - pair............ \$98

2005-2014 Mustang kits include billet aluminum caliper mounts -

No modifications to OEM mounts that compromise integrity

# **PRO RACE AXLES**



**STRANGE PRO RACE AXLES** are forged from Hy-Tuf alloy steel that was originally developed for highly stressed landing gear in military aircrafts. The material is in the class of Ultra Strength alloys and contains low carbon, high manganese, high nickel, and high molybdenum steel. Pro racing axles are thru-hardened allowing for a Drag Racing shaft with an exceptionally high, 240,000 PSI, tensile strength while retaining ductility.

Strange Engineering stocks a variety of completely finished axles for specific applications. After 50 years of manufacturing axles, we know which applications are most common and there is no reason to charge you extra for priority service. If your requirements cannot be met by our extensive inventory, we will custom manufacture your axle at no additional cost. Strange Pro Race axles are the best value on the market today. That's why more drag racing competitors rely on Strange axles than all other brands combined! Contact a Strange sales technician to discuss your specific application.

A1000 Pro Race Hy-Tuf axles, any length, and any spline up to 35
Choice of bolt circle - Tapped for 1/2" or 5/8" screw-in studs- pair..... \$454

A1003 Lightened axle flange - Five 1" round lightening holes- pair...... \$34

A1004 Additional charge for access hole or third bolt circle- pair....... \$16

A1005 Lighten shaft and flange - 35 spline axles shafts gun-drilled with .875"
bore Maximum length is 20" - Flanges machined with five round
holes- pair...... \$129

A1006 Ultra Lite flange - Pocket mill flange in solid or gun-drilled axles...... \$80

Gun-drilled axles with A1006 option also are lightened underneath the Strange logo

**STRANGE GUN-DRILLED AXLES** were created to reduce rotating weight. Gun-drilling is a process where the core of the axle is removed leaving a .875" hole through the entire length of the shaft. Each gun-drilled axle is further lightened by eliminating axle flange material with five 1" diameter holes. A 35 spline gun-drilled axle is 25.6% lighter than a solid 35 spline axle and can be used for non-blown cars weighing under 1.850 lbs.

See picture on next page

Strange 40 spline gun-drilled axles can withstand the abuse of drag racing vehicles weighing 3,500 lbs. and with quarter mile elapsed time slips under seven seconds. Strange 40 spline gun-drilled axles are 10% lighter than 35 spline solid axles and an astonishing 54% stronger. The Strange 40 spline gun-drilled axle is truly the ultimate drag racing axle.

A solid axle shaft is stronger than an equivalent in diameter gun-drilled shaft. When weight is not an issue, a gun-drilled axle should not be used.



A2000

Pro Race Hy-Tuf 40 spline gun-drilled axles, any length up to 30", choice of bolt circle, with five 1" round lightening holes in flange, tapped for 1/2" or 5/8" screw-in studs- pair......\$578

A2100

Pro Race Hy-Tuf 40-spline solid axles, any length up to 35", choice of bolt circle, with five 1" round lightening holes in flange, tapped for 1/2" or 5/8" screw-in studs- pair......\$494

A1006

Ultra Lite flange - Pocket mill axle flange for solid or gundrilled axles........\$80

Gun-drilled axles with A1006 option are further lightened underneath the Strange logo removing an additional 1.50 lbs. compared to five 1" holes

#### **ADVANTAGES OF THE STRANGE RADIUS RING**

The axle bearing shoulder, where the bearing rests against the axle, encounters a tremendous amount of stress. The load, compared to OEM axles, is compounded by the use of slicks, larger diameter tires, aggressive launches, and tire shake. This area can be strengthened by increasing the diameter of the bearing surface and minimizing the distance from the axle bearing shoulder to the outside of the axle flange.

When we developed our 40 spline axle, the bearing surface OD was made to a giant 1.7735". By using a special stainless steel ring, we were able to accomplish three important goals. Increase the radius of the axle bearing shoulder, drastically reduce stress concentrations, minimize the distance from the bearing shoulder to the outside of the axle flange, and set axle offset to match the brake kit.

# **PRO RACE AXLE PACKAGES**



Strange has combined quality axle components with money saving prices. As with all packages, Strange pro race axle packages are designed to allow for easy installation. Our packages save you shopping time, down time and money.

A1100 C-Clip Eliminator Kit coupled with a thru-hardened Pro Race axle, that has been re-designed for circle track and hard-core street/strip use, offers GM 10 & 12 bolt rear end owners the best of both worlds.

Our specially designed A1100 c-clip eliminator kit employs giant Timken unit bearings, which survive severe side loads and constant use. Not to be confused with eliminator kits supplied with ball bearings that are for Drag Racing Only. The axle shaft is tapered to resist bending loads and the flange is machined with a generous radius for maximum side load strength.

# GM STREET / STRIP / OVAL TRACK AXLE PACKAGE WITH C-CLIP ELIMINATOR KIT

P1011GOT Special Design Pro Race Hy-Tuf axles for small GM housing ends - Chevy 8.20", 8.5" or 12 bolt car

Choice of bolt circle, A1100 c-clip eliminator kit and 2" or 3" (1/2"-20) stud kit... \$546

P1011G0T58 P1011G0T with upgrade to A1027 5/8" stud kit........... \$598

#### **GM DRAG RACE AXLE PACKAGE WITH C-CLIP ELIMINATOR KIT**

P1011GDR Pro Race Hy-Tuf axles for small or large GM housing ends - Chevy 8.20", 8.5" or 12 bolt car

Choice of bolt circle, Drag Race Only c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit... \$546

P1011GDR58 P1011GDR with upgrade to A1027 5/8" stud kit...... \$598

# FORD MUSTANG 8.8" DRAG RACE AXLE PACKAGE WITH C-CLIP ELIMINATOR KIT

P1011F86 Ford 31, Strange 33 or 35 spline Pro Race Hy-Tuf axles,

86-93 Mustang 8.8" c-clip eliminator kit for OEM drum brakes, and 2" or 3" (1/2"-20) stud kit.....\$546

P1011F8658 With upgrade to A1027 5/8" stud kit......\$598

# **PRO RACE AXLE PACKAGES**



# FORD MUSTANG 8.8" DRAG RACE AXLE PACKAGE WITH C-CLIP ELIMINATOR KIT Continued

P1011F94	Ford 31, Strange 33 or 35 spline Pro Race Hy-Tuf axles, c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit
	1994-2004 Mustang 8.8" applications for OFM disc brakes - Specify GT or Cobra brakes \$665

P1011F9458 With upgrade to A1027 5/8" stud kit....... \$719

OPAX01\* Optional Strange ABS reluctor rings- pair..... \$89

P1011F05 Ford 31, Strange 33 or 35 spline Pro Race Hy-Tuf axles, c-clip eliminator kit, and 2" or 3" (1/2-20) stud kit

2005-2014 Mustang 8.8" applications for OEM GT or GT500 disc brakes...... \$775

P1011F0558 With upgrade to A1027 5/8" stud kit....... \$829

OPAX05 Optional OEM ABS reluctor rings- pair....... \$98

and 2" or 3" (1/2-20) stud kit...... \$506

P1008 with upgrade to 5/8" stud kit... \$560

P100858

2005-2014 kits include billet aluminum caliper mounts - Eliminating modifications that compromise integrity of the OEM mount 5/8" stud kit option limited to A1027 for all axle packages with eliminator kits due to clearance requirements

# STRANGE 28 TO 35 SPLINE PRO RACE AXLE PACKAGES FOR FORD. GM. MOPAR AND MORE

P1007	Pro Race Hy-Tuf axles any length, splined up to 35, choice of bolt circle, axle bearings, and 2" or 3" (1/2-20) stud kit	P1013	Pro Race Hy-Tuf 35 spline gun-drilled axles, any length up to 20", five round lightening holes, choice of bolt circle, axle bearings, and 5/8" stud kit
P100758	P1007 with upgrade to 5/8" stud kit \$550		
		A1006	Ultra Lite flange - Pocket mill axle flange
P1008	Pro Race Hy-Tuf axles any length, splined up to 35, choice of bolt circle, axle bearings, retainer plates,		for solid or gun-drilled axles- pair \$80

<sup>\*</sup> Needs special A1094E reluctor rings for ABS applications

# **40 SPLINE PRO RACE AXLE PACKAGES**



# **40 SPLINE PRO RACE AXLE PACKAGES**

P1014 Lightweight Pro Race Hy-Tuf 40 spline gun-drilled axles with .875" bore, any length up to 32", choice of bolt circle five 1" round lightening holes in flange, A1019 axle bearings, and 5/8" stud kit..... \$689

P1015 With upgrade to A1024 3.350" OD axle bearings..... \$834

P1016 Pro Race Hy-Tuf 40 spline solid axles - any length up to 35", choice of bolt circle five 1" round lightening holes in flange, A1019 axle bearings, and 5/8" stud kit..... \$608

P1017 With upgrade to A1024 3.350" OD axle bearings..... \$754



The Strange 2 piece axle has evolved beyond our competitions offerings. Designed for the professional racer, the two-piece axle is stronger and safer than a traditional one piece axle. However, the two-piece axle is not a replacement for a floater rear end. Strange developed the lightweight two-piece axle with Warren and Kurt Johnson in 1999 and is now common place among the most demanding teams including NHRA Pro Stock World Champions Greg Anderson, Allen Johnson, Jason Line and Erica Enders.



- Large capacity double row ball bearing
- 3.543" OD / 1.968" ID bearing housed in aluminum cartridge
- Provides low friction Allows high misalignment
   1" bore gun-drilled 300M axle shafts
- Axle design captivates axle bearing Eliminates wedding ring
   Reduces wheel deflection
  - Lightweight construction

# **STRANGE 2 PIECE AXLE PACKAGE**

#### P1020

Lightweight 2 Piece axle assembly - Includes 1" bore gun-drilled 300M shafts, Ultra light independent axle flanges, chrome moly 5/8" stud kit, low friction high misalignment axle bearings, bearing cartridges, seals, and caliper mounts. Requires L5500SBB Strange housing ends and Strange brake kit for two piece axles - Not included................\$1,795

OPPS01 Upgrade to HD spherical roller bearings..... \$250

L5500SBB Housing end for Strange 2 piece axle- each..... \$88

C18104NBUC Pro Carbon brake Kit - 4 3/4" BC - for Strange 2 piece axles - caliper mounts not included.... \$2,850

C18105NBUC Pro Carbon brake Kit - 5" BC - for Strange 2 piece axles - caliper mounts not included......... \$2,850

B1711NBM Pro Steel brake kit - 4 3/4" & 5" BC - for Strange 2 piece axles - caliper mounts not included.... \$545

# **GM & FORD 8.8" PRO AXLE & SPOOL PACKAGES**



#### GM OVAL TRACK AXLE & SPOOL PACKAGE WITH C-CLIP ELIMINATOR KIT

P2000GOT Pro Race Hy-Tuf axles for Chevy 8.20", 8.50" or 12 bolt using Small GM housing ends & OEM drum brakes\*

30 or 33 spline axles, choice of bolt circle, A1100 c-clip eliminator kit for oval track & street / strip

applications, choice of 2" or 3" (1/2-20) stud kit and Lightweight Pro Steel spool...... \$639

P2000G0T58 With upgrade to A1027 5/8" stud kit...... \$694

OPRA01 Upgrade to 35 spline axles and spool...... \$50

## GM DRAG RACE AXLE & SPOOL PACKAGE WITH C-CLIP ELIMINATOR KIT

P2000GDR Pro Race Hy-Tuf axles for Chevy 8.20", 8.50" or 12 bolt using Small GM housing ends & OEM drum brakes\*

30 or 33 spline axles, choice of bolt circle, Drag Race Only c-clip eliminator kit with low friction ball bearing,

choice of 2" or 3" (1/2-20) stud kit and Lightweight Pro Steel spool..... \$639

OPRA01 Upgrade to 35 spline axles and spool..... \$50

# **GM & FORD PRO RACE & SPOOL PACKAGES**

#### FORD MUSTANG 8.8" PRO RACE AXLE & SPOOL PACKAGE WITH C-CLIP ELIMINATOR KIT

P2000FM86 Pro Race Hy-Tuf 31 or 33-spline axles, c-clip eliminator kit, 2" or 3" (1/2-20) stud kit, and Lightweight Pro spool

1986-1993 Mustang 8.8" using OEM drum brakes \*..... \$639

P2000FM8658 With upgrade to A1027 5/8" stud kit...... \$694

OPRA01 Upgrade to 35 spline axles and spool....... \$50

\* Aftermarket disc brake kits can be used if designed for c-clip eliminator kits

All 5/8" upgrades above are limited to A1027 stud kit due to clearances necessary for eliminator kits

P2000FM94 Pro Race Hy-Tuf 31 or 33-spline axles, c-clip eliminator kit, 2" or 3" (1/2-20) stud kit, and

Lightweight Pro spool 1994-2004 Mustang 8.8" using OEM disc brakes (specify GT or

Cobra brakes)... \$722

P2000FM9458 P2000FM94 with upgrade to A1027 5/8" stud kit... \$775

OPRA01 Upgrade to 35 spline axles and spool... \$50

OPAX01\* Optional Strange ABS reluctor rings for 1994-2004 Mustang- pair... \$89

P2000FM05 Pro Race Hy-Tuf 31 or 33-spline axles, c-clip eliminator kit, 2" or 3" (1/2-20)

stud kit, and Lightweight Pro spool 2005-2014 Mustang 8.8" using OEM GT or GT500 disc

brakes..... \$829

P2000FM0558 With upgrade to A1027 5/8" stud kit...... \$884

OPRA01 Upgrade to 35 spline axles and spool....... \$50

OPAX05 Optional OEM ABS reluctor rings for 2005-2014 Mustang- pair..... \$98

05-14 kits include billet aluminum caliper mounts - Eliminating modifications that compromise integrity of the OEM mount
5/8" stud kit option limited to A1027 due to clearance requirements for eliminator kits



<sup>\*</sup> Needs special A1094E reluctor rings for ABS applications

# PRO RACE AXLE & SPOOL PACKAGES & ACCESSORIES



# STRANGE PRO RACE HY-TUF AXLE AND LIGHTWEIGHT STEEL SPOOL PACKAGES

Easily configured to a wide range of applications. Custom designed for your vehicle at money saving prices!

P2005	Pro Race Hy-Tuf axles any length, 33 or 35-spline, choice of bolt circle, axle bearings, 2" or 3" (1/2-20) stud kit, retaining plates, and Lightweight Pro Steel spool \$654	
P200558	With upgrade to 5/8" stud kit \$709	
P2007	Pro Race Hy-Tuf axles any length, 33 or 35-spline, choice of bolt circle, axle bearings, 2" or 3" (1/2-20) stud kit, and Lightweight Pro Steel spool \$634	
P200758	With upgrade to 5/8" stud kit \$689	



P2015 Lightweight Pro Race Hy-Tuf 40 spline gun-drilled axles - .875" bore, any length up to 30" choice of bolt circle, five 1" round lightening holes in axle flange, A1019 axle bearings, 5/8" stud kit and Lightweight Pro Steel spool..... \$915

P2016 With upgrade to A1024 3.350" OD axle bearings...... \$1,036

P2017 Pro Race Hy-Tuf 40 spline solid axles - any length up to 35" choice of bolt circle, five 1" round lightening holes in axle flange, A1019 axle bearings, 5/8" stud kit and Lightweight Pro Steel spool)..... \$826

P2018 With upgrade to A1024 3.350" OD axle bearings...... \$946



OPTIONAL ULTRA LIGHT FLANGE AVAILABLE FOR ALL PRO RACE AXLE PACKAGES A1006 ADD \$80

# **PRO RACE AXLE & SPOOL PACKAGES & ACCESSORIES**

#### STRANGE STUD KITS


Strange offers the choice of two types of 5/8" stud kits.


Our traditional A1027 stud kit features premium bolts & adjustable .875" long sleeves. This the lightest stud kit.

In addition, we offer five lengths of chrome moly stud kits. Ensure dimension "A" is able to fully engage into your wheel. This needs to be slightly greater than the combined thickness of the disc brake hat or drum and the thickness of the wheel.

Every 5/8" stud kit includes aluminum anti-marring washers that protect the wheel from the nut. Anti-marring washers are offered in .250", .4375" and .688" widths. The .4375" washer is our standard washer thickness. You can choose to substitute with the .250" by adding "S" at the end of the part number, or "L" for the .688" washers.


Strange 1/2" stud kits are offered in 2" and 3" lengths. The stud length refers to the threaded portion of the stud. To determine the usable thread that will protrude from the axle flange, subtract the thickness of the axle flange and an additional .0625" for the washer. 1/2" stud kits are designed for 1/2"-20 lug nuts - Not included in kits.

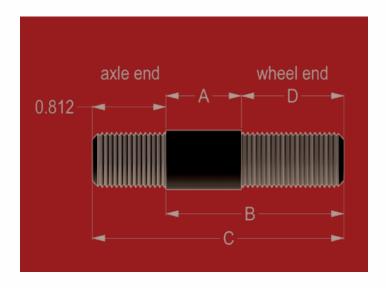

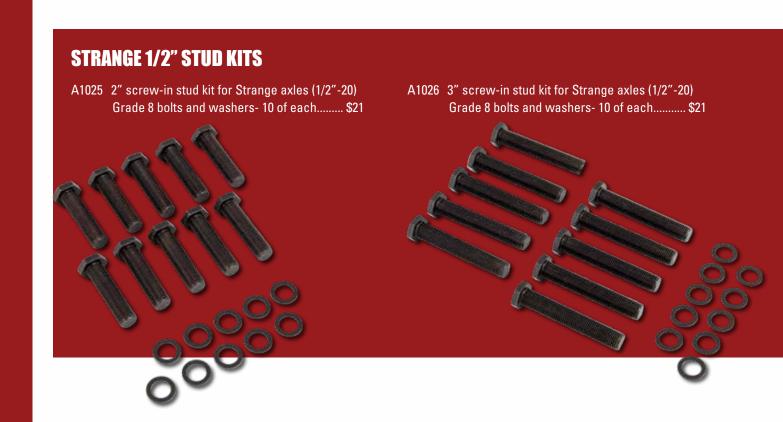

# **PRO RACE AXLE & SPOOL PACKAGES & ACCESSORIES**



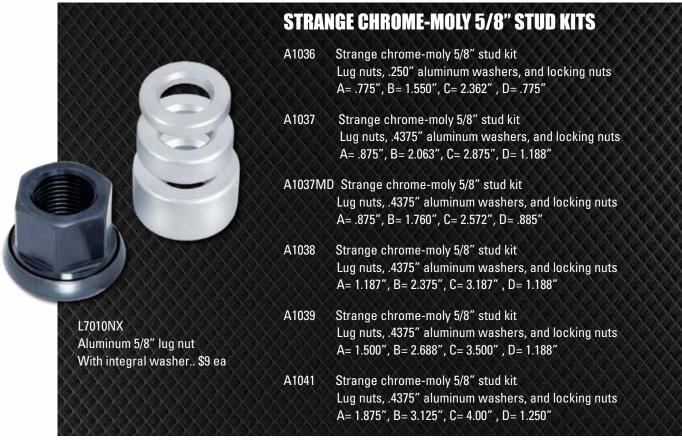

All Strange 5/8" Stud Kits - \$90

A1090

A1099ST

A1099GT5

A1099STGT5

brakes

stock

#### **ACCESSORIES**

C-Clip Eliminator kits were originated by Strange Engineering and are required by drag racing rules for good reason.

C-Clip type axles are retained by a clip above the spline portion of the axle. When the stock axle or differential breaks, the entire axle and wheel assembly can slide completely out of the housing. The Strange kit eliminates the dangers of wheel loss. The bearings are press fit onto the axles and enclosed by aluminum halves. These halves bolt to the stock axle housing ends, securely retaining the axle.

Drag Race Only kits are supplied with low friction ball bearings. They reduce rotational loss, but are not acceptable for any other use.

Street, Street/Strip, and Oval Track kits utilize tapered axle bearings. These kits are ideal for many applications requiring extended use.

#### Street / Strip c-clip eliminator kit for Strange axles @ 1.563" 86-93 Mustang 8.8" using OEM drum brakes \*..... \$179 A1093 Street / Strip c-clip eliminator kit for OEM c-clip axles 86-93 Mustang 8.8" using OEM drum brakes\*......\$179 A1094 Street / Strip c-clip eliminator kit for Strange axles @ 1.563". Includes billet aluminum caliper mounts for GT brakes 94-04 Mustang 8.8" using OEM GT disc brakes.......\$230 A1095 Street / Strip c-clip eliminator kit for Strange axles @ 1.563". Includes billet aluminum caliper mounts for Cobra brakes 94-04 Mustang 8.8" using OEM Cobra disc brakes...... \$230 A1096\* Street / Strip c-clip eliminator kit for OEM c-clip axles. Includes billet aluminum caliper mounts for GT brakes 94-04 Mustang 8.8" using OEM GT disc brakes...... \$230 A1097 Street / Strip c-clip eliminator kit for OEM c-clip axles. Includes billet aluminum caliper mounts for Cobra brakes 94-04 Mustang 8.8" using OEM Cobra disc brakes......\$230 A1098 Street / Strip c-clip eliminator kit for OEM c-clip axles. Includes billet aluminum caliper mounts for stock brakes 05-14 Mustang 8.8" using OEM stock disc brakes......\$329 Street / Strip c-clip eliminator kit for OEM & replacement c-clip axles. Includes billet aluminum calper mounts for A1098GT5 brakes 05-14 Mustang 8.8" using 13-14 GT500 brakes...... \$349 GT500 A1099 Street / Strip c-clip eliminator kit for Strange custom Hy-Tuf axles. Includes billet aluminum caliper mounts for stock brakes 05-14 Mustang 8.8" using OEM stock disc brakes......\$339

Street / Strip c-clip eliminator kit for Strange custom Alloy axles. Includes billet aluminum caliper mounts for

Strip c-clip eliminator kit for Strange Hy-Tuf axles. Includes billet aluminum caliper mounts for GT500 brakes

Street / Strip c-clip eliminator kit for Strange Alloy axles. Includes billet aluminum caliper mounts for GT500

brakes 05-14 Mustang 8.8" using OEM stock disc brakes......\$339

05-14 Mustang 8.8" using 13-14 GT500 brakes...... \$339

05-14 Mustang 8.8" using 13-14 GT500 brakes...... \$339

**FORD 8.8" MUSTANG C-CLIP ELIMINATOR KITS** 

1986-1993 Mustang applications can use aftermarket disc brake kits designed specifically for c-clip eliminator kits

<sup>\*</sup> Needs special A1094E reluctor rings for ABS applications



# **GM 10 & 12 BOLT C-CLIP ELIMINATOR KITS**

ends using OEM drum brakes \*..... \$179

•			
A1030	Drag Race Only c-clip eliminator kit for Strange axles @ 1.532" Chevy 8.2, 8.5, & 12 bolt car with Small GM housing ends using OEM drum brakes * \$179	A1033ST	Street / Strip c-clip eliminator kit for Strange Alloy axles Chevy 8.2, 8.5, & 12 bolt car with Small GM housing ends using OEM drum brakes * \$179
A1031	Drag Race Only c-clip eliminator kit for Strange axles @ 1.532" Chevy 12 bolt with Large GM housing ends using OEM drum brakes * \$220	A1034	Drag Race Only c-clip eliminator kit for Strange axles @ 1.563" Chevy 8.2, 8.5, & 12 bolt car with Small GM housing ends using OEM drum brakes * \$179
A1031Z	Drag Race Only c-clip eliminator kit for Strange axles @ 1.563" Chevy 12 bolt with Large GM housing ends using OEM drum brakes * \$220	A1100	Street/Strip/Oval c-clip eliminator kit for Strange axles @ 1.7735" Chevy 8.2, 8.5, & 12 bolt car with Small GM housing ends using OEM drum brakes * \$220
A1033	Street / Strip c-clip eliminator kit for OEM c-clip axles Chevy 8.2, 8.5, & 12 bolt car with Small GM housing	* Car	n use aftermarket disc brake kits designed for c-clip

# **AXLE BEARINGS**

A1013	Timken tapered axle bearing, locking ring & outboard seal 1.562" bore for 3.150 ID housing end- ea \$35
A1019	Ball style axle bearing and locking ring 1.772" bore for 3.150" ID housing end- ea \$40
A1020	Ball style axle bearing and locking ring 1.531" bore for 3.150" ID housing end- ea \$40
A1021	Ball style axle bearing and locking ring 1.562" bore for 3.150" ID housing end- ea \$40
A1022	Mopar non-adjustable axle bearing, locking ring, spirolox, retainer plate - 1.562" bore for 2.875" housing end- ea \$40
A10220	B Mopar non-adjustable axle bearing, locking ring, fixed retainer plate - 1.562" bore for 2.875" housing end- ea \$40
A1023	Small Ford axle bearing, locking ring, and retainer plate 1.562" bore for 2.835" ID housing end- ea \$50
A1024	Ball style axle bearing, locking ring and o-ring

1.772" bore for 3.350" housing end- ea.... \$154

	INER PLATES
A1114	Small GM retainer plate for Strange H1143 ends- ea \$14
A1015	Oldsmobile retainer plate- ea \$14
A1016	Early Big Ford retainer plate with 1/2 " bolt holes- ea \$14
A1018	Late big Ford retainer plate with 3/8" bolt holes- ea \$14
A1023B	Small Ford retainer plate- ea \$14
H1138B	Ford 8.8" retainer plate for Strange H1138 ends- ea \$14
H1147B	Mopar retainer plate for Strange H1147 ends- ea \$14

eliminator kits

# **US STRANGE, SPICER, RICHMOND, MOTIVE**

#### 8620 PRO STREET / STANDARD

**GEAR SETS:** The combination of 8620 steel and precise heat treatment results in a gear set with the strength and hardness necessary for excellent life in circle track, street and some Drag Racing applications.

# 9310 DRAG RACE / PRO GEAR SETS: For Drag

Racing ONLY! High nickel 9310 steel gear sets are softer by design to absorb the high impact shock loads that occur in many Drag Racing classes.



#### **ISOTROPIC SUPERFINISHED GEAR SET**

- Reduces Friction
- Eliminates Break-in
- Increases Durability
- Improves Oil Retention
- Diminishes Heat Generation & Gear Noise

Ford 9" Pro, 9 1/2", & 10" Gears In-Stock Available for many other rear ends - Call

**GEAR SET BREAK-IN:** Pro Street / Standard gear sets must be broken-in properly to ensure maximum life and quiet operation. During this process, the gear set is heat cycled and lapped. A new ring and pinion will generate a lot of heat due to friction. If temperatures get too high, they will alter the surface hardness of the material leading to early failure.

**LUBRICATION:** The differential will best determine the proper gear lube. Always follow the recommendations of the differential manufacturer. In general, clutch style posi units or cone type systems require a quality petroleum based gear lube along with a bottle of friction modifier. For helical gear units, use the petroleum based fluid only. Always check before using any synthetic fluids as irreversible damage may occur. If using a spool, the choice is yours between petroleum and synthetic.

**RING GEAR LIGHTENING SERVICE:** Ring gear lightening is offered for all gear sets that can benefit from the process. The ring gear is machined to reduce rotating weight. Weight reduction ranges from .75 lbs – 2.75 lbs, depending on ratio and the rear end it fits. Each ring gear is machined with a generous radius and the weight reduction will not reduce gear life for the vast majority of applications.

ERFORMANCE GEAR SET

D3596 Lighten purchased new ring gear......\$75
D3597 Lighten customer supplied new ring gear.....\$100

32



# **GEAR RATIO CALCULATION**

Revolutions Per Minute =  $336 \times Gear Ratio \times MPH$ 

Tire Diameter

Miles Per Hour = Tire Diameter x RPM

336 x Gear Ratio

Gear Ratio = Tire Diameter x RPM

336 x MPH

Tire Diameter = 336 x Gear Ratio x MPH

**RPM** 

## **APPROXIMATE 1/4 MILE ET TO MPH** (without power adders or throttle stop)

13.00 - 100 mph 12.00 - 108 mph 11.00 - 121 mph 10.00 - 132 mph 9.00 - 147 mph 8.00 - 165 mph 12.50 - 105 mph 11.50 - 116 mph 10.50 - 127 mph 9.50 - 139 mph 8.50 - 158 mph 7.50 - 176 mph

**STRANGE MASTER INSTALLATION KITS:** When investing in the new gear set and/or carrier, it is important to use new bearings, seals, ring gear bolts, and other essential installation components. New installation components will reduce the chance of gear set and component failure.

Strange Engineering offers master installation kits for most gear set applications. Master installation kits feature Timken bearings and races, ring gear bolts, shims, seal, pinion nut, gasket or sealer, brush, marking compound, and crush collar if required.




**STRANGE BASIC INSTALLATION KITS:** Basic kits include ring gear bolts, shims, seal, pinion nut, gasket or sealer, brush, marking compound, and crush collar if required. Bearings and races are not included.

MICROBLUE: This two step process greatly reduces friction between the ring and pinion. The REM stage removes the rough OEM machining marks. Afterwards, it receives the MicroBlue coating which improves the wetting characteristics of the differential fluid. This makes the gear set "slipperier" in gear oil. Less heat and friction add up to more available horsepower and longer gear life. This process is also available for bearings and races in installation kits.

D3598G MicroBlue Gear Set......\$240

D3598B Pinion & side (bearings/races)...... \$130

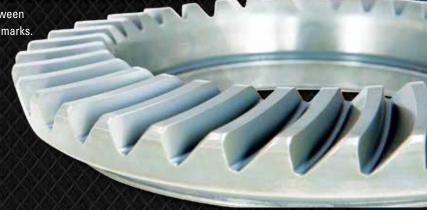

# **US STRANGE, SPICER, RICHMOND, MOTIVE**

# **DANA 60 STANDARD GEAR SETS**

D3550	Spicer	3.54 ratio 3 Series\$265
RSD60354	Richmond	3.54 ratio 3 Series \$261
D3551	Spicer	3.73 ratio 3 Series \$265
RSD60373	Richmond	3.73 ratio 3 Series \$248
D3552	Spicer	4.10 ratio 3 Series\$265
D3570	Richmond	4.10 ratio 5 Series\$240
RS05897430H	Hoosier	4.30 ratio 3 Series\$225

D3553	Spicer	4.56 ratio 5 Series \$265
RSD60456	Richmond	4.56 ratio 5 Series\$238
RSD60488	Richmond	4.88 ratio 5 Series \$248
RSD60513	Richmond	5.13 ratio 5 Series\$251
D3555	Spicer	5.86 ratio 5 Series \$265

<sup>\* 3-</sup>series fits 4.10 & numerically lower carrier

# DANA 60 DRAG RACE / PRO GEAR SETS (5-SERIES)

US Gear	4.10 ratio	\$338
Richmond	4.10 ratio	\$388
US Gear	4.30 ratio	\$338
US Gear	4.56 ratio	\$338
Richmond	4.56 ratio	\$390
US Gear	4.88 ratio	\$338
Richmond	4.88 ratio	\$390
US Gear	5.38 ratio	\$333
Richmond	5.38 ratio	\$360
	Richmond US Gear US Gear Richmond US Gear Richmond US Gear	US Gear 4.30 ratio

RP05997557US	US Gear	5.57 ratio	\$333
RP05997586US	US Gear	5.86 ratio	\$333
RP05997617US	US Gear	6.17 ratio	\$333
RPD60617	Richmond	6.17 ratio	\$408

# **DANA 60 / STRANGE S60 INSTALLATION KITS**

D3512 D3513 D3525 D3526 D3527 D3528 D1592	Strange S60 Master installation kit	D1580 D3502A D3502 D3504 D3503 D3508 D3508F	Side bearings & races for OEM Dana 60\$69 Pinion seal
---	-------------------------------------	---	---



<sup>\* 5-</sup>series fits 4.56 & numerically higher carrier

# **MOPAR 8.75"** (742 CASE) **STANDARD GEAR SETS AND INSTALLATION KITS**

Challenger 68 only

- 10 bolt Drop-Out
- Ring gear= 8.75"
- Pinion shaft= 1.750" (straight pinion)
- Pinion spline= 10
- 3/8"-24 LH bolt holes

Barracuda 64-68 Belvedere 57-68 B200, B250, W100 & W150 65-68 Chrysler 300 57-68

Charger (Daytona) 66-68 Coronet 63-68 Dart, Swinger 66-68 Fury 57-68 Imperial, New Yorker

57-68 Monaco, Polara 63-68 Road Runner 68 only Satellite 68 only Super Bee 68 only Valiant 60-68

RS03887373E Motive	3.73 ratio \$258	RSM430E Richmond	4.30 ratio \$231
RS03887391E Motive	3.91 ratio \$261	RSM457E Richmond	4.57 ratio \$231
RSM410E Richmond	4.10 ratio \$231	RS03887486E Motive	4.86 ratio \$219
RS03887430E Motive	4.30 ratio \$219	RSM513E Richmond	5.13 ratio \$242

R5261 Master installation kit for 742 case \*..... \$129 Master installation kit for 742 case \*\*..... \$129 R5261SP

\* For OEM carrier

R5260

Basic installation kit...... \$68

Barracuda 69-73

Belvedere 69-70

\*\* For Strange spool or Auburn carrier

## **MOPAR 8.75"** (489 CASE) **STANDARD GEAR SETS AND INSTALLATION KITS**

• 10 bolt Drop-Out • Ring gear= 8.75"

• Pinion shaft= 1.875"

• Pinion spline= 29

• 3/8"-24 LH bolt holes

RS03887323LUS RS03887355LUS RS03887355L RS03887373LUS RS03887373L RS03887391LUS RS03887391L RS03887410LUS RS03887410L

**US** Gear **US** Gear Motive **US Gear** Motive **US** Gear Motive **US Strange** 

Motive

Chrysler 300 69-73 Challenger 70-73 3.23 ratio..... \$253 3.55 ratio..... \$248

3.55 ratio...... \$263 3.73 ratio..... \$248 3.73 ratio..... \$265 3.91 ratio..... \$248 3.91 ratio..... \$265 4.10 ratio..... \$248 4.10 ratio...... \$265

B200, B250, W100 & W150 69-73

Charger (Daytona) 69-73 Dart, Swinger 69-73 Fury 69-73 Newport, New Yorker 69-73

RS03887430LUS RS03887456LUS RS03887456L RSM457L RS03887486LUS RSM486L RS03887513LUS

Monaco, Polara 69-73 **US** Gear **US** Gear Motive

Richmond **US** Gear Richmond **US** Gear

Road Runner 69-73 Satellite 69-73 Super Bee 69-70 Valiant 69-73

4.30 ratio..... \$253 4.56 ratio..... \$248 4.56 ratio..... \$265 4.57 ratio..... \$280 4.86 ratio..... \$253 4.86 ratio..... \$280 5.13 ratio..... \$253

R5266 Master installation kit for 489 case...... \$129 R5265 R5258 Ring gear bolts \*.....\$18 D1584 Side bearings & races for 489 case......\$60



# **US STRANGE, SPICER, RICHMOND, MOTIVE**

# 9" FORD STANDARD GEAR SETS - 28 SPLINE PINION

RS07890300US	US Gear	3.00 ratio \$204	RS07890486	Motive	4.86 ratio \$232
RS07890300	Motive	3.00 ratio \$263	RS07890500US	US Gear	5.00 ratio \$204
RS07890325US	US Gear	3.25 ratio \$204	RS07890500	Motive	5.00 ratio \$242
RS07890325	Motive	3.25 ratio \$263	RS07890514US	US Gear	5.14 ratio \$204
RS07890340US	US Gear	3.40 ratio \$204	RS07890514	Motive	5.14 ratio \$226
RS07890350US	US Gear	3.50 ratio \$202	RS07890529US	US Gear	5.29 ratio \$204
RS07890350	Motive	3.50 ratio \$204	RS07890529	Motive	5.29 ratio \$242
RS07890370US	US Gear	3.70 ratio \$201	RS07890538US	US Gear	5.38 ratio \$204
RS07890370	Motive	3.70 ratio \$242	RS07890543US	US Gear	5.43 ratio \$204
RS07890380US	US Gear	3.80 ratio \$201	RS07890543	Motive	5.43 ratio \$226
RS07890389US	US Gear	3.89 ratio \$201	RS07890567US	US Gear	5.67 ratio \$204
RS07890389	Motive	3.89 ratio \$238	RS07890567	Motive	5.67 ratio \$226
RS07890391US	US Gear	4.71 ratio \$201	RS07890583US	US Gear	5.83 ratio \$204
RS07890400US	US Gear	4.00 ratio \$201	RS07890583	Motive	5.83 ratio \$242
RS07890411US	US Gear	4.11 ratio \$201	RS07890600US	US Gear	6.00 ratio \$204
RS07890411	Motive	4.11 ratio \$238	RS07890600	Motive	6.00 ratio \$242
RS07890430US	US Gear	4.30 ratio \$201	RS07890614US	US Gear	6.14 ratio \$204
RS07890430	Motive	4.30 ratio \$247	RS07890620US	US Gear	6.20 ratio \$204
RS07890457US	US Gear	4.57 ratio \$201	RS07890620	Motive	6.20 ratio \$242
RS07890457	Motive	4.57 ratio \$215	RS07890633US	US Gear	6.33 ratio \$204
RS07890463US	US Gear	4.63 ratio \$204	RS07890633	Motive	6.33 ratio \$242
RS07890471US	US Gear	4.71 ratio \$204	RS07890650US	US Gear	6.50 ratio \$204
RS07890478US	US Gear	4.78 ratio \$204	RS07890650	Motive	6.50 ratio \$242
RS07890486US	US Gear	4.86 ratio \$204			

# 9" FORD DRAG RACE PRO GEAR SETS

	nd ling!	IO GENII OLIO
RP07990340US	US Gear	3.40 ratio * \$425
RP07990340ISF	US ISF Gear	3.40 ratio * \$520
RPF90340	Richmond	3.40 ratio * \$484
RP07990350US	US Gear	3.50 ratio * \$425
RP07990350ISF	US ISF Gear	3.50 ratio * \$520
RPF90350	Richmond	3.50 ratio * \$484
RP07990360US	US Gear	3.60 ratio * \$425
RP07990360ISF	US ISF Gear	3.60 ratio * \$520
RPF90360	Richmond	
RP07990370US	US Gear	3.70 ratio * \$425
RP07990370ISF	US ISF Gear	
RP07990370	Motive	3.70 ratio * \$551
RPF90370	Richmond	3.70 ratio * \$418
RP07990389US	US Gear	3.89 ratio * \$425
RP07990389ISF	US ISF Gear	3.89 ratio * \$520
RP07990389	Motive	3.89 ratio * \$440
RPF90389	Richmond	3.89 ratio * \$446
RP07990411US	US Gear	4.11 ratio * \$395
RP07990411ISF	US ISF Gear	4.11 ratio * \$490
RP07990411	Motive Richmond	4.11 ratio * \$425
RPF90411	Richmond	4.11 ratio * \$411
RP07990429US	US Gear	4.29 ratio * \$395
RP07990429ISF	US ISF Gear	4.29 ratio * \$490
RP07990429	Motive	4.29 ratio * \$450
RPF90429	Richmond	4.29 ratio * \$412
RP07990457US	US Gear	4.57 ratio * \$395
RP07990457ISF	US ISF Gear	
RP07990457	Motive	4.57 ratio * \$450
RPF90457	Richmond	4.57 ratio * \$423
RP07990471US	US Gear	4.71 ratio * \$395
RPF90471	Richmond	4.71 ratio * \$408
RP07990486US	US Gear	4.86 ratio * \$395
RP07990486ISF	US ISF Gear	4.86 ratio * \$490
RP07990486	Motive	4.86 ratio * \$450
RPF90486	Richmond	4.86 ratio * \$409

RPF90486S	Richmond	4.86 ratio	\$371
RP07990500US	US Gear	5.00 ratio	\$375
RP07990500ISF	US ISF Gear	5.00 ratio	\$468
RPF90500	Richmond	5.00 ratio	\$370
RP07990514US	US Gear	5.14 ratio	\$375
RP07990514ISF	US ISF Gear	5.14 ratio	\$468
RPF90514	Richmond	5.14 ratio	\$360
RP07990529US	US Gear	5.29 ratio	\$375
RP07990529ISF	US ISF Gear	5.29 ratio	\$468
RP07990529	Motive	5.29 ratio	\$375
RPF90529	Richmond	5.29 ratio	\$408
RP07990543US	US Gear	5.43 ratio	\$375
RP07990543ISF	US ISF Gear	5.43 ratio	\$468
RP07990543	Motive	5.43 ratio	\$378
RPF90543	Richmond	5.43 ratio	\$389
RP07990567US	US Gear	5.67 ratio	\$375
RP07990567ISF	US ISF Gear	5.67 ratio	\$468
RP07990567	Motive	5.67 ratio	\$378
RPF90567	Richmond	5.67 ratio	\$389
RP07990583US	US Gear	5.83 ratio	\$375
RP07990583ISF	US ISF Gear	5.83 ratio	\$455
RPF90583	Richmond	5.83 ratio	\$390
RP07990600US	US Gear	6.00 ratio	\$360
RP07990600ISF	US ISF Gear	6.00 ratio	\$455
RPF90600	Richmond	6.00 ratio	\$351
RP07990620US	US Gear	6.20 ratio	\$360
RP07990620ISF	US ISF Gear	6.20 ratio	\$455
RPF90620	Richmond	6.20 ratio	\$351
RP07990633US	US Gear	6.33 ratio	\$360
RP07990633ISF	US ISF Gear	6.33 ratio	\$455
RPF90650	Richmond	6.50 ratio	\$362
DATE OF THE SAME	CAN DE L'ORD	The state of the s	20

<sup>\* 35</sup> spline pinion shaft- Suitable pinion support and yoke required

### **US STRANGE, SPICER, RICHMOND, MOTIVE**

#### 9 1/2" DRAG RACE PRO GEAR SETS - 35 SPLINE PINION

RP07995325	US Gear	3.25 ratio	\$485	RP07995411M0T	Motive	4.11 ratio \$509
RP07995325ISF	US ISF Gear	3.25 ratio	\$605	RPF95411	Richmond	4.11 ratio \$619
RP07995340	US Gear	3.40 ratio	\$485	RP07995429	US Gear	4.29 ratio \$470
RP07995340ISF	US ISF Gear	3.40 ratio	\$605	RP07995429ISF	<b>US ISF Gear</b>	4.29 ratio \$590
RP07995350	US Gear	3.50 ratio	\$485	RP07995429M0T	Motive	4.29 ratio \$509
RP07995350ISF	US ISF Gear	3.50 ratio	\$605	RPF95429	Richmond	4.29 ratio \$619
RP07995360	US Gear	3.60 ratio	\$485	RP07995456M0T	Motive	4.56 ratio \$509
RP07995360ISF	<b>US ISF Gear</b>	3.60 ratio	\$605	RP07995457	US Gear	4.57 ratio \$470
RP07995370	US Gear	3.70 ratio	\$485	RP07995457ISF	<b>US ISF Gear</b>	4.57 ratio \$590
RP07995370ISF	US ISF Gear	3.70 ratio	\$605	RP07995486	US Gear	4.86 ratio \$470
RP07995389	US Gear	3.89 ratio	\$470	RP07995486ISF	<b>US ISF Gear</b>	4.86 ratio \$590
RP07995389ISF	US ISF Gear	3.89 ratio	\$590	RP07995500	US Gear	5.00 ratio \$470
RP07995389MOT	Motive	3.89 ratio	\$509	RP07995500ISF	<b>US ISF Gear</b>	5.00 ratio \$590
RP07995411	US Gear	4.11 ratio	\$470	RP07995514	US Gear	5.14 ratio \$470
RP07995411ISF	US ISF Gear	4.11 ratio	\$590	RP07995514ISF	US ISF Gear	5.14 ratio \$590

All 9 1/2" gear sets require suitable case, pinion support, & yoke ensure housing was designed with proper clearance to use these gears

#### 10" DRAG RACE PRO GEAR SETS - 35 SPLINE PINION

RP07910350	US Gear	3.50 ratio	\$965
RP07910350ISF	US ISF Gear	3.50 ratio	\$1,075
RP07910370	US Gear	3.70 ratio	\$965
RP07910370ISF	US ISF Gear	3.70 ratio	\$1,075
RP07910389	US Gear	3.89 ratio	\$965
RP07910389ISF	US ISF Gear	3.89 ratio	\$1,075
RP07910411	US Gear	4.11 ratio	\$965
RP07910411ISF	US ISF Gear	4.11 ratio	\$1,075
RP07910411MOT	Motive	4.11 ratio	\$1,288
RP07910429	US Gear	4.29 ratio	\$965
RP07910429ISF	US ISF Gear	4.29 ratio	\$1,075
RP07910429MOT	Motive	4.29 ratio	\$1,275
RP07910457	US Gear	4.57 ratio	\$965
RP07910457ISF	US ISF Gear	4.57 ratio	\$1,075
RP07910457MOT	Motive	4.57 ratio	\$1,275
RP07910471	US Gear	4.71 ratio	\$965
RP07910471ISF	US ISF Gear	4.71 ratio	\$1,075
RP07910471MOT	Motive	4.71 ratio	\$1,245
RP07910500	US Gear	5.00 ratio	\$965
RP07910500ISF	US ISF Gear	5.00 ratio	\$1,075
ALL MOTOR WITH THE		MANAGEMENT AND	

RP07910500MOT Motive 5.00 ratio...... \$1,233 **US Gear** 5.14 ratio..... \$965 RP07910514 RP07910514ISF US ISF Gear 5.14 ratio...... \$1,075 RP07910514MOT Motive 5.14 ratio..... \$1,233 RP07910533M0T Motive 5.33 ratio..... \$1,257 RP07910537M0T Motive 5.37 ratio...... \$1,257 RP07910543 **US** Gear 5.43 ratio..... \$965 RP07910543ISF US ISF Gear 5.43 ratio..... \$1,075 RP07910543M0T Motive 5.43 ratio..... \$1,233 RP07910567 **US** Gear 5.67 ratio...... \$965 US ISF Gear 5.67 ratio...... \$1,075 RP07910567ISF RP07910583 **US** Gear 5.83 ratio..... \$965 US ISF Gear 5.83 ratio..... \$1,075 RP07910583ISF RP07910620 **US** Gear 6.20 ratio...... \$965 RP07910620ISF US ISF Gear 6.20 ratio...... \$1,075

All 10" gear sets require suitable case, pinion support, & yoke Ensure housing was designed with proper clearance to use these gears



R5237UC

### US STRANGE, SPICER, RICHMOND, MOTIVE

### **BASIC INSTALLATION KITS**

R5240	Basic installation kit for posi units	\$37
R5242	Basic installation kit for open carriers	\$37

Basic kits include center section gasket

### **ULTRA CASE GEAR CHANGE KITS**

R5237UCR	For tapered bearings and 28 spl pinion \$220
R5237UCB	For ball bearing and 28 spl pinion * \$275
R5237UCBR	For ball bearing and 28 spl pinion\$287
R5238UC	For tapered bearings and 35 spl pinion * \$225
R5238UCR	For tapered bearings and 35 spl pinion \$260
R5238UCB	For ball bearing and 35 spl pinion *\$340
R5238UCBR	For ball bearing and 35 spl pinion\$350

For tapered bearings and 28 spl pinion \*...... \$185

\* Pinion races not included

Center section gasket not included in above kits

- Available senarately

#### **MASTER INSTALLATION KITS**

R5237	N1922 or N2322 support and 28 spl pinion * \$130
R5237WR	N1922 or N2322 support and 28 spl pinion \$149
R5238	N1922 or N2322 support and 35 spl pinion * \$133
R5238WR	N1922 or N2322 support and 35 spl pinion \$155
R5236	N1917 or Ford Daytona support *\$100
R5236WR	N1917 or Ford Daytona support\$120
R5235	Stock Ford (non-Daytona) support *\$125
R5235WR	Stock Ford (non-Daytona) support \$135
R5235WR R5237B	Stock Ford (non-Daytona) support \$135 N1920 or N2323 support and 28 spl pinion* \$245
	, , ,
R5237B	N1920 or N2323 support and 28 spl pinion* \$245
R5237B R5237BR	N1920 or N2323 support and 28 spl pinion* \$245 N1920 or N2323 support and 28 spl pinion \$258

\* Pinion races not included

Center section gasket not included in above kits- Available separately



### 9" FORD INSTALLATION COMPONENTS

H1112G	Center section gasket\$6
H1111	Fel Pro high performance gasket\$15
H1111S	Lube Locker center section gasket\$25
D1586	Side bearings & races for 2.891" case\$45
D1588	Side bearings & races for 3.062" case\$45
D1590	Side bearings & races for 3.250" case\$45
D1592	Side bearings & races for 3.812" case\$60
N1923	Pinion bearing kit for N1922 & N2322 (28 spline pinion) \$75
N1924	Pinion bearing kit for N1922 & N2322 (35 spline pinion) \$75
N1916	Pinion bearing kit for N1917 & N1914\$42
N1916PS	Pinion bearing kit for stock Ford support (non-Daytona)\$65
N2323S	Pinion bearing kit for N1920 & N2323 (28 spline pinion) \$175
N2323L	Pinion bearing kit for N1921 & N2323 (35 spline pinion) \$195

Pinion bearing kits contain front and rear bearing, two piece preload assembly, seal, and any required adapters/spacers (races not included)

N1960	Pinion seal for 28 spline pinion\$10
N1960L	Low drag pinion seal for 28 spline pinion\$11
N1961	Pinion seal for 35 spline pinion\$9
N1961L	Low drag pinion seal for 35 spline pinion\$11
N1922A	Pinion nut for 28 spline pinion\$7
N1922B	Pinion nut for 35 spline pinion\$7
N1930	Front pinion bearing for N1923 & Ultra case\$20 (28 spline pinion)
N1936	Front pinion bearing for N1924\$19
N1925H	Front pinion bearing for N1916\$12
N1931	Front pinion race for N1922 & Ultra case\$15
N1914C	Front pinion race for N1917 & N1914\$6
N1938	Rear pinion bearing for N1923 & N1924\$30
N1925J	Rear pinion bearing for N1917 & N1914\$26
N2001F	Rear pinion bearing for Ultra case\$43
N1920B	Rear pinion bearing for 28 spline ball bearing supports\$110
N1920BM	Rear pinion bearing for 35 spline ball bearing supports\$150
N1920BC	Ceramic rear pin brg for 28 spline ball bearing supports\$375
N1920BMC	Ceramic rear pin brg for 35 spline ball bearing supports\$420
N1939	Rear pinion race for N1922\$18
N1914B	Rear pinion race for N1917 & N1914\$9

N2001E	Rear pinion race for Ultra case	\$28
N1926A	Pinion bearing adapter sleeve from N1923	\$13
N1926D	Torrington washer from N1923	
N1920G	Pinion bearing adapter sleeve from N2323S	\$25
N1920D	.220" thick ball bearing spacer (35 spline pinion)	\$11
N1919	Two piece preload assembly from	$\times$
	N1921, N1923 & N1924	\$20
N1920HK	Two piece preload assembly from N1920	
N1925	Two piece preload assembly from N1916	
N1924A	Solid preload spacer from N1924	
N1920F	Solid preload spacer to replace N1920HK	
N2001C	Solid preload spacer for Ultra case w/tapered brgs	\$19
N1940	Tail bearing	\$19
N1941	Tail bearing retainer	
N1943R	T/B retainer plate w/screws for HD Pro & Ultra case	e \$12
N1962	Pinion depth shim kit	
N1962UC	Pinion depth shim kit for Ultra case	\$45
N1958A	Pinion support o-ring	\$3
N1950B	Pinion support o-ring for Ultra case	\$3
N1965	Ring gear bolt kit (7/16"-20 x .875")	\$9
D1565RK*	Ring gear bolt kit	\$10
N1967	Ring gear bolt kit (7/16"-20 x .1.00")	\$9
N1968	Ring gear bolt kit (7/16"-20 x 1.250")	\$9
N1964	Ring gear bolt kit (1/2"-20 x .875")	\$9
N1973	ARP bolt kit (7/16" for D2004 spool)	\$65
N1975	ARP bolt kit (7/16" for Strange steel spools)	\$31
N1976	ARP bolt kit (1/2" for Strange steel spools)	
N1910H	Load bolt assembly for Ultra case	\$39
N1910T	Load bolt assembly for Billet case	
		- W/

\* 7/16" for D1512, D1513 & D1565 aluminum spools

N1950HK Pinion supp spacer kit for Ultra case using 10" gear.. \$61







#### **US STRANGE, SPICER, RICHMOND, MOTIVE**

#### 8.8" FORD STANDARD GEAR SETS & INSTALLATION KITS

- 10 bolt cover
- Ring gear= 8.8"
- Pinion shaft= 1.625"
- Pinion spline= 30
- 7/16"-20 RH bolt holes

Mustang V8 86-pres Bronco 83-96 Explorer 90-present Ranger 4.0L 90-present F150 83-present F250 83-90 E150 87-present E250 83-87

Thunderbird 87-96 Cougar 88-96 Mercury (full size) 82-present Ford (full size) 86-present

RS07888308US	US Gear	3.08 ratio	\$182
RS07888331	Motive	3.31 ratio	\$257
RS07888355US	US Gear	3.55 ratio	\$182
RS07888355	Motive	3.55 ratio	\$224
RS07888373US	US Gear	3.73 ratio	\$182
RS07888373	Motive	3.73 ratio	\$224
RSF888390US	US Gear	3.90 ratio	\$182
RSF888390	Motive	3.90 ratio	\$263
RS07888410US	US Gear	4.10 ratio	\$182
RS07888410	Motive	4.10 ratio	\$224
RS07888430US	US Gear	4.30 ratio	\$182
RS07888430	Motive	4.30 ratio	\$240
R5231** Mas	ster installation	kit	. \$94

Basic installation kit.....\$34 R5230\*\* R5230PS 8.8 solid adjustable preload spacer kit...... \$22 D1582\*\* Side bearings and races.....\$40

\*\* Will NOT fit Super 8.8 Mustang

RS07888456US	US Gear	4.56 ratio*\$182
RS07888456	Motive	4.56 ratio*\$231
RS07888471US	US Gear	4.71 ratio*\$182
RS07888488US	US Gear	4.88 ratio*\$182
RS07888488	Motive	4.88 ratio*\$242
RS07888513US	US Gear	5.13 ratio* \$182
RS07888514	Motive	5.14 ratio* \$271
RS07888571	Motive	5.71 ratio* \$276

\* Posi units require modified cross pin

#### **8.8" FORD SUPER IRS GEAR SETS**

- Ring gear= 8.8"
- Pinion shaft= 2.001"
- Pinion spline= 30

RSF88355 Richmond RS07888373-15US **US** Gear RSF88373 Richmond RS07888391-15US **US Gear** RSF88391 Richmond RSF88409 Richmond RS07888411-15US **US** Gear RSF88456 Richmond RSF88488 Richmond  M12-1.25 bolt holes Mustang 2014-17 Mustang 2015-20

3.55 ratio......\$248 3.73 ratio......\$224 3.73 ratio..... \$248 3.91 ratio...... \$224 3.91 ratio.......\$248 4.09 ratio......\$248 4.11 ratio..... \$224 4.56 ratio......\$248

4.88 ratio...... \$248

Fits 3.31 & numerically higher carrier



#### 8" FORD STANDARD GEAR SETS & INSTALLATION KITS

• Ring gear= 8" • Pinion shaft= 1.187"

• 10 bolt cover

• Pinion spline= 25

• 7/16"-20 RH bolt holes

Basic installation kit......\$35

**Bobcat 75-80** Comet 71-77 Cougar 67-79 rlane 64-74

Fairmont 75-79 Falcon 64-70 Granada 75-79

Maverick 71-78 Monarch 74-80 Mustang 64-79

Pinto 71-80 Torino 71-74 Zephyr 78-79

		I	Fairla
RS07880280US	US Gear	2.80 ratio	\$249
RS07880300US	US Gear	3.00 ratio	\$222
RS07880300	Motive	3.00 ratio	\$252
RS07880325US	US Gear	3.25 ratio	\$222
RS07880325	Motive	3.25 ratio	\$261
RS07880340	Motive	3.40 ratio	\$273
RS07880355US	US Gear	3.55 ratio	\$206
RS07880355	Motive	3.55 ratio	\$224
RS07880380US	US Gear	3.80 ratio	\$206
RS07880380	Motive	3.80 ratio	\$219
R5226	Master ins	tallation kit	\$94

RS07880411US RS07880411 RS07880462US RSF80462 RS07880355 RS07880380US RS07880380 RS07880411US RS07880411 RS07880462US RSF80462

**US** Gear 4.11 ratio..... \$206 Motive 4.11 ratio..... \$213 **US** Gear Richmond Motive **US Gear** Motive **US Gear** Motive **US** Gear

Richmond

4.62 ratio..... \$221 4.62 ratio..... \$245 3.55 ratio..... \$224 3.80 ratio..... \$206 3.80 ratio.....\$219 4.11 ratio..... \$206 4.11 ratio..... \$213 4.62 ratio..... \$205 4.62 ratio..... \$224


R5225

### **GM 12 BOLT CAR STANDARD GEAR SETS**

- 12 bolt cover
- Ring gear= 8.875"
- Pinion shaft= 1.625"
- Pinion spline= 30
- 3/8"-24 RH bolt holes

Chevelle 64-72 Camaro 67-72 Chevy II & Nova 65-72 El Camino 65-72 Impala 65-72 F85 68-70 Firebird 67-72 Grand Prix 70-72 GTO 65-72 Le Mans 65-72

Monte Carlo 70-72



2 series carrier- A= .600" (OEM 2.76-down) 3 series carrier- A= 1.00" (OEM 3.07-3.73) 4 series carrier- A= 1.315" (OEM 4.11-up)

RS01888308US	US Gear	3.08 ratio	\$205
RS12B308	Richmond	3.08 ratio	\$243
RS01888331US	US Gear	3.31 ratio	\$254
RS01888342US	US Gear	3.42 ratio	\$205
RS12B342	Richmond	3.42 ratio	\$231
RS01888355US	US Gear	3.55 ratio	\$254
RS12B355	Richmond	3.55 ratio	\$255
RS01888373US	US Gear	3.73 ratio*	\$205
RS12B373	Richmond	3.73 ratio*	\$211
RS01888373-4US	US Gear	3.73 ratio**	\$205
RS12B373X	Richmond	3.73 ratio**	\$255
RS12B390	Richmond	3.90 ratio*	\$255
RS12B390X	Richmond	3.90 ratio**	\$255
RS01888391US	US Gear	3.91 ratio *	\$205
RS12B410	Richmond	4.10 ratio**	\$204
RS12B410X	Richmond	4.10 ratio*	\$226
RS01888411US	US Gear	4.11 ratio**	\$205
RS01888411	Motive	4.11 ratio**	\$194
RS01888411XUS	US Gear	4.11 ratio*	\$205
RS01888430US	US Gear	4.30 ratio	\$205

		86868		06.0
Ć	RS12B433	Richmond	4.33 ratio	\$349
	RS01888456US	US Gear	4.56 ratio**	\$205
	RS01888456	Motive	4.56 ratio**	\$220
	RS12B456	Richmond	4.56 ratio**	\$204
	RS01888456XUS	US Gear	4.56 ratio*	\$205
ζ	RS12B456X	Richmond	4.56 ratio*	\$225
	RS01888488US	US Gear	4.88 ratio	\$205
١	RS01888488	Motive	4.88 ratio	\$200
	RS12B488	Richmond	4.88 ratio**	\$225
	RS01888514	Motive	5.14 ratio#	\$204
	RS12B514	Richmond	5.14 ratio**	\$199
	RS01888538US	US Gear	5.38 ratio#	\$205
	RS12B538	Richmond	5.38 ratio#	\$255
	RS12B586	Richmond	5.86 ratio#	\$272
	RS12B614	Richmond	6.14 ratio#	\$272
			インシンシンシン	

- \* For 3 series carrier fits 3.90 & numerically lower carrier
- \*\* For 4 series carrier fits 4.11 & numerically higher carrier
- # Differentials require special cross pin

### GM 12 BOLT CAR DRAG RACE PRO GEARS - 4 SERIES

RP12B411 RP01988430US RP12B433 RP01988456US RP12B456 RP01988488US RP12B488 RP01988514US	Richmond US Gear Richmond US Gear Richmond US Gear Richmond US Gear	4.11 ratio	\$339 \$377 \$339 \$341 \$339 \$341
--	--	------------	--

RP12B514	Richmond	5.14 ratio	\$341
RP01988538US	US Gear	5.38 ratio	\$339
RP12B538	Richmond	5.38 ratio	\$341
RP01988557US	US Gear	5.57 ratio	\$339
RP12B557	Richmond	5.57 ratio	\$362
RP01988586US	US Gear	5.86 ratio	\$339
RP12B586	Richmond	5.86 ratio	\$358
RP01988600US	US Strange	6.00 ratio	\$339



#### **GM 12 BOLT CAR INSTALLATION KITS & COMPONENTS**

R5211	Master installation kit\$94	R5214B	Pinion nut	\$5
R5210	Basic installation kit\$32	R5214BA	Pinion nut washer	\$3
R5215	Two piece pinion preload assembly \$32	D1582	Side bearings & races	\$40
R5211B	Rear pinion bearing\$16	R5211A	Side bearing shim kit	\$24
R5211C	Rear pinion race \$11	R5214C	Pinion depth shim kit	\$6
N1925H	Front pinion bearing\$12	R5212	Ring gear bolts with lock washers	\$9
N1914C	Front pinion race\$6	H1106G	12 bolt cover gasket	\$9
R5211D	Pinion soal \$11			

#### GM 12 BOLT TRUCK STANDARD GEAR SETS & INSTALLATION KIT

- 12 bolt cover
- Ring gear= 8.875"
- Pinion shaft= 1.438"

• Pinion spline= 30

• 3/8"x24 RH bolt holes

K10 (15), C10 (15) 64-82 G20 & G25 69-81

RS01888308T Richmond RS01888342T Richmond RS01888373T Richmond RS01888373TX Richmond RS01888410T Richmond RS01888410TX Richmond

3.08 ratio..... \$231 3.42 ratio..... \$231 3.73 ratio\*\*..... \$215 3.73 ratio\*..... \$235 4.10 ratio\*\*..... \$217 4.10 ratio\*..... \$243 RS01888456T RS01888456TX RS01888488T RS01888513T RS01888538T R5211T

Richmond 4.56 ratio\*\*..... \$220 4.56 ratio\*..... \$255 Richmond 4.88 ratio..... \$238 Richmond Richmond 5.13 ratio..... \$255 Richmond 5.38 ratio..... \$255 Master installation kit..... \$94

- \* Fits 2.76-3.42 carrier
- \*\* Fits 3.73 & numerically higher carrier

#### **GM 8.6 STANDARD GEAR SETS**

- Ring gear= 8.6"
- Pinion shaft= <u>1.875</u>"
- Pinion spline = 32
- 7/16" 20 LH bolt holes

2010-2015 Camaro



#### **GM 8.5 10 BOLT STANDARD GEAR SETS & INSTALLATION KITS**

- 10 bolt cover
- Ring gear= 8.5"
- Pinion shaft= 1.625"
- Pinion spline= 30
- 7/16"-20 LH bolt holes
- OEM carriers: 2.56 & num. lower/ 2.73 & num. higher

K10 (15) Fmt. w/o IFS 77-87 K10, K15 rear 82-pres. C10 (15) 77-pres. G10, G15 71-pres. G20 (25) 79-pres. Buick (full) 71-pres. Apollo 73-77 Biscayne 71-74 Century 73-77 Chevy (full) 71-pres.

Chevy II, Nova 70-79 Camaro 70-81 Cutlass 71-77 El Camino 71-77 Electra 73-78 Firebird/GTO 70-81 Grandsport 73-84 Grand Prix 71-77 LaSabre 73-74 Lemans 71-77

Richmond

Richmond

Richmond

Richmond

Richmond

Monte Carlo 71-77 Olds (full) 71-89 Olds (Hurst) 85-88 Omega 73-75 & 77-79 Pontiac (full) 71-89 Roadster 71-74 Trans Am/ Z28 70-81 Ventura 71-77

4.56 ratio...... \$226

4.88 ratio..... \$226

5.13 ratio..... \$238

5.38 ratio..... \$278

5.57 ratio..... \$278

RSG85308	Richmond	3.08 ratio	\$231
RSG85323	Richmond	3.23 ratio	\$272
RSG85342	Richmond	3.42 ratio	\$233
RSG85373	Richmond	3.73 ratio	\$226
RSG85390	Richmond	3.90 ratio	\$226
RSG85410	Richmond	4.10 ratio	\$222

R5205	Master installation kit	\$94
R5205-SP	Master installation kit*	\$94
R5204	Basic installation kit	\$32
R5202	Ring gear spacer with bolts	\$45
D1583	8.5 side bearings & races (for 28 spline)	\$45
D1585*	8.5 side bearings & races	\$45

<sup>\*</sup> For 8.5 using Strange 30 or 33 spline spools

GM 8.2 1964-1972 CHEVY 10 B	NIT STANNARN GFAR SFTS.	& INSTALLATION KITS

<ul> <li>10 bolt cover</li> <li>Ring gear= 8.2"</li> <li>Pinion shaft= 1.438"</li> <li>Pinion spline= 25</li> <li>3/8"-24 RH bolt holes</li> </ul>		Camaro 67-69 Impala 65-72 Chevelle, Chevy II, Nova 64-72 Monte Carlo 70-72 Caprice 65-71	
RSG82308	Richmond	3.08 ratio	\$269
RS01882336	Motive	3.36 ratio	
RS01882355	Motive	3.55 ratio	

Richmond	3.08 ratio	\$269
Motive	3.36 ratio	\$269
Motive	3.55 ratio	\$269
Motive	3.73 ratio	\$217
Richmond	3.08 ratio	\$310
Motive	3.36 ratio	\$269
	Motive Motive Motive Richmond	Motive         3.36 ratio           Motive         3.55 ratio           Motive         3.73 ratio           Richmond         3.08 ratio

R5217	Master installation kit	\$94
R5217-SP	Master installation kit *	\$94
R5200	Basic installation kit	\$30
D1585*	8.2 side bearings & races	\$45

<sup>\*</sup> For 8.2 using Strange 33 spline spool

El Camino 64-71 Sprint 71-72

RSG85456

RSG85488

RSG85513

RSG85538

RSG85557

All ratios fit 3.08 and higher carrier

RS01882355	Motive	3.55 ratio	\$269
RS01882373	Motive	3.73 ratio	\$217
RS01882390	Motive	3.90 ratio	\$294
RS01882411	Motive	4.11 ratio	\$183
RS01882456	Motive	4.56 ratio	\$228

#### **US STRANGE, SPICER, RICHMOND, MOTIVE**

#### GM BUICK / OLDS / PONTIAC 8.2 10 BOLT STANDARD GEAR SETS & INSTALLATION KITS

- 10 bolt cover
- Ring gear= 8.2"
- Pinion shaft= 1.438"
- Pinion spline= 27
- 3/8"x20 RH bolt holes

Buick (full) 64-71 Firebird 67-71 Olds F85 64-71 Pontiac (full) 64-71

Tempest GTO 64-71

• All gear sets are for 3.55 & numerically higher carriers

RS01882355B0P	Motive
RS01882373BOP	Motive
RS01882411R0P	Motive

3.55 ratio	\$304
3.73 ratio	\$320
4.11 ratio	\$323

R52170P D1585\* \* Installation kit will not fit Buick

#### 10 BOLT GM 7.5" / 7.625" STANDARD GEAR SETS & INSTALLATION KITS

- 10 bolt cover
- Ring gear= 7.5"
- Pinion shaft= 1.438"
- Pinion spline= 27
- 7/16"-20 RH bolt holes
- OEM carriers: 3.08 & numerically lower (2-Series)
- OEM carriers: 3.23 & numerically higher (3-Series)

S10 & S15 82-present Astro & Safari 85-present Buick (full) 77-85 Camaro (Z28) 82-02 Century 78-81

Chevy (full) 77-96 Cutlass 78-88 Firebird (TA) 82-02 Monte Carlo 78-88 Olds (full) 77-89 Omega 75-79 Pontiac (full) 77-89 Phoenix 78-81 Regal 78-83 Skylark 76-79 Ventura 78-81

Note: Gear sets will not fit Vega, Monza or Starfire

RSG75273	
RSG75308	
RSG75323	
RSG75342	
RSG75342X	
RSG75373	
EASASAS	

R5218

R5213

Richmond Richmond Richmond Richmond Richmond Richmond 

 2.73 ratio
 \$267

 3.08 ratio
 \$267

 3.23 ratio
 \$248

 3.42 ratio\*
 \$243

 3.42 ratio\*\*
 \$248

 3.73 ratio\*
 \$235

 RSG75373X Richmond 3.73 ratio\*\*..... \$243 RSG75390 Richmond 3.90 ratio\*..... \$277 RSG75410 Richmond 4.10 ratio\*..... \$233 4.10 ratio\*\*..... \$243 RSG75410X Richmond RSG75456 4.56 ratio\*...... \$233 Richmond RSG75456X Richmond 4.56 ratio\*\*..... \$269

- \* Fits 3.23 & numerically higher carrier
- \*\* Fits 3.08 & numerically lower carrier



### GM 1963-1979 CORVETTE 8.4

- Ring gear= 8.32"
- Pinion shaft= 1.626"
- Pinion spline= 30
- 3/8"-24 RH bolt holes

RS01884308C	US Gear	3.08 ratio \$245
RSG84308C	Richmond	3.08 ratio \$345
RS01884336C	US Gear	3.36 ratio \$245
RSG84336C	Richmond	3.36 ratio \$345
RS01884355C	US Gear	3.55 ratio \$238
RSG84355C	Richmond	3.55 ratio\$238

RSG84370C	Richmond	3.70 ratio	\$339
RS01884373C	US Gear	3.73 ratio	\$238
RSG84390C	Richmond	3.90 ratio	\$339
RS01884411CX	US Gear	4.11 ratio*	\$238
RS01884456CX	US Gear	4.56 ratio*	\$238

<sup>\*</sup> Fits 3.90 & numerically lower carrier

#### **GM 1980-1982 CORVETTE DANA 44**

- Ring gear= 8.87"
- Pinion shaft= 1.626"
- Pinion spline= 29
- 3/8"-24 RH bolt holes

RS05844411	US Gear	4.11 ratio	\$298
RS05844433	US Gear	4.33 ratio	\$298
RS05844456	US Gear	4.56 ratio	\$298

Fits 3.92 & numerically higher carrier

### **GM 1997-2013 CORVETTE**

Excludes Grand Sport, Z06, ZR1, & A/T after 2004

- Ring gear= 8.25"
- Pinion shaft= 2.535"
- Pinion spline= 27

RS01885342C	Motive	3.42 ratio	\$454
RS01885373C	Motive	3.73 ratio	\$454
RS01885390C	Motive	3.90 ratio	\$454
RS01885410C	Motive	4.10 ratio	\$454
RS01885411CX	Motive	4.11 ratio*	\$492

<sup>\*</sup> Fits 2.75 & numerically lower carrier

#### **GM 1984-1996 CORVETTE DANA 36**

- Ring gear= 7.75"
- Pinion shaft= 1.375"
- Pinion spline= 26
- 3/8"-24 RH bolt holes

RS05878354CUS	US Gear	3.54 ratio\$327
RS05878354CXUS	US Gear	3.54 ratio*\$340
RS05878373CUS	US Gear	3.73 ratio\$327
RSD36375CX	US Gear	3.73 ratio*\$340
RSD36375CX	Richmond	3.75 ratio\$413

### **GM 2014-2019 CORVETTE**

RS01888390C	Motive	3.90 ratio	\$849
RS01888410C	Motive	4.10 ratio	\$849



#### STRANGE, EATON, AUBURN, SPICER, US GEAR, HOOSIER, YUKON

**DIFFERENTIALS:** Driving down a straight road, the differential allows both axles to turn at the same speed. During a turn, the outer wheel needs to turn faster than the inner wheel since it has to cover a longer path in the same amount

of time. If not, the tire will scrub or hop around the corner. The differential compensates for this condition, by altering the RPM relationship between the two axle shafts. There are several designs that meet this requirement, but accomplish it in different ways.

Spicer Clutch

**OPEN DIFFERENTIALS:** This is the most basic unit. It uses side gears (internally splined to the axles), engaged with spider gears (shaft mounted to the case). All the gears are in constant mesh. As long as the load remains the same, the gears will remain idle and both axles will turn at the same rate. Once an axle becomes harder to rotate, like the inside tire during a turn,

it causes the spider gears to walk around the held gear and drive the other side gear faster. While it may perform adequately for some applications, it is very sensitive to any variance in loads. If weight is shifted in the vehicle it can cause this condition to occur. An open differential in a performance car is undesirable since it will speed-up the tire with the worst traction.



### **CLUTCH SYSTEMS:** Similar in design

as the open, but have a series of friction plates between the side gear and the case. Standard Duty units have them behind one side gear, Heavy Duty have them behind both. There is a spring or springs that apply tension between the case, clutch pack(s), and the side gears.

By increasing friction in this way, it requires more load variation before the clutches release and allow the gears to start rotating and speed-up the outer wheel. The number of plates, their material, and spring pressure will alter the release point. The clutch packs can be replaced when worn-out, but their replacement cost might be prohibitive.



with tapered bores and the side gears have a mating cone shape on their backside. There is a spring or springs that apply pressure to the side gears causing them to wedge into the case. It also uses spider gears and a cross shaft as above. The operation is much the same as the

clutch system, but utilizes tapered cones instead of clutch packs. Standard Duty units have smaller cones than the Heavy Duty. Larger cones have more surface area resulting in more holding power and longer life. These are non-rebuild-able and must be replaced when worn out.



LOCKERS: A Locker is a mechanical unit that is sensitive to torque application. It will lock (drive both wheels) under acceleration, or unlock (allow the axles to turn at different rates) during coast or deceleration. A very strong piece, since it doesn't use any clutches or cones that can wear out, which made it a good choice for it's original truck application. Since driver

input mainly determines whether the unit is locked or not, it can be very frustrating to a driver who is unfamiliar with the operation of the differential. Hard acceleration during a turn will cause the unit to lock and skid the tire. Between lock and unlock, a distinctive "clunk" can be heard. During a properly executed turn, clicking will be audible since locking teeth are allowed to jump each other inside the unit.



HELICAL GEAR UNIT: A helical gear differential is a mechanical unit that, unlike the Locker, offers smooth and progressive power transfer. If one tire begins to slip relative to the other tire, a separating force is created between the pinion gears and side gears. This generates internal friction which slows the spinning wheel

and sends power to the wheel with the most traction. These differentials are comparable to the strength of a Locker, but without it's downsides. The Strange 8.8 & 9" S-Trac, due to materials and design, exceed the strength limits of the Locker while offering all the benefits of a helical gear unit.



**SPOOL:** A spool is one solid part that replaces all components of a differential. It will always turn both axles at the same speed with an equal amount of force. Due to the simplistic design, it is much stronger and lighter than any differential. It also allows the use of larger axles that can handle greater amounts of torque. This makes it the best choice for Drag

Racing, Drifting, and other forms of motorsports that require uninterrupted transfer of power to both wheels. Spools should never be considered for a street application. They are produced in forged steel, forged aluminum, and billet aluminum. Before purchasing an aluminum spool, contact Strange to discuss your particular application.



#### STRANGE 35 SPLINE S-TRAC FOR FORD 9" & FORD 8.8"

The Strange 35 Spline S-Trac is a helical gear differential that offers smooth and progressive power transfer. Its superior design and quality make it ideal for the most abusive Street/Track applications.

strength and also cold treated to extend service life while reducing wear. A dry film solid lubricant coating is applied to friction surfaces to minimize wear.

The torque biasing S-Trac is purely mechanical, which eliminates the need for clutches. It provides quiet operation while maximizing tire traction and vehicle acceleration. The forged steel case halves are heat treated and fully machined to minimize weight and provide a rigid mounting surface for the ring gear resulting in improved gear life. Internal gear pocket geometry is designed to minimize stress risers increasing component life.

The housing encapsulates precision manufactured gears, including 9310 steel pinion gears that provide exceptional strength. All internal gears, pinion and side gears, are vacuum heat treated to increase

The S-Trac is recommended for full bodied street/track cars that run the 1/4 mile in the low 9 seconds or slower. For Drag Race Only vehicles, Strange Engineering strongly recommends using a spool. The seamless operation also makes it ideal for road racing, off-road and autocross. This premium unit carries a limited lifetime replacement warranty to the original purchaser.

- Torque Biased Mechanical Clutchless Quiet Operation- Maximized Traction and Acceleration
- Forged Steel Case Halves are Heat Treated and Fully Machined Providing a Light, Durable, and Rigid Unit
- Internal Gear Pocket Geometry is Designed to Minimize Stress Risers for Increased Life
- Dry Film Solid Lubricant Coating Applied to Thrust Surfaces Minimizing wear
- 9310 Steel Pinion Gears for Ultimate Torque Carrying Capacity
- Aggressive Gear Helix Angle Promotes Superior Torque Bias In Situations of Unequal Traction
- All Internal Gears Made from 9310 Steel and Vacuum Heat Treated for Superior Strength
- Gears are also Cold Treated to Optimize Fatigue Life and Reduce Wear



**LUBRICATION:** Always follow the recommendations of the differential manufacturer. In general, clutch style posi units or cone type systems require a quality petroleum based gear lube along with a bottle of friction modifier. For helical gear units, use the petroleum

based fluid only. Always check before using any synthetic fluids as irreversible damage may occur. If using a spool, the choice is yours between petroleum and synthetic.

#### DANA 60 / STRANGE S60 / MOPAR 8.75" DIFFERENTIAL

D3537 * D3538 ** D3523 * D3533 * D3534 ** D3535 * D3536 **	Dana 60 / S60 Dana 60 / S60	Spicer Spicer Strange Eaton Eaton Eaton	Clutch Clutch Helical Gear Helical Gear Helical Gear Locker Locker	35 spline\$465 35 spline\$495 35 spline\$750 35 spline\$925 35 spline\$850 35 spline\$750
R542051	Mopar 8.75"	Auburn	H/D Cone	30 spline \$555
D3532T	Mopar 8.75"	Eaton	Helical Gear	30 spline \$650

<sup>\* 3</sup> series carrier \*\* 5 series carrier



### FORD 9" / FORD 8.8 / FORD 8" DIFFERENTIAL

N1974	Ford 9"	US Gear	Clutch	28 spline \$410
N1981	Ford 9"	Eaton	Helical Gear	28 spline \$563
R542036	Ford 9"	Auburn	H/D Cone	31 spline \$555
N1970H *	Ford 9"	Hoosier	Clutch	31 spline \$389
N1970F *	Ford 9"	Strange	Clutch	31 spline \$389
N1970Y	Ford 9"	Yukon	Clutch	31 spline \$389
N1979	Ford 9"	Eaton	Helical Gear	31 spline \$563
N1972	Ford 9"	Eaton	Locker	31 spline \$625
N1980 *	Ford 9"	Strange	H/D Helical Gear	35 spline \$995
N1971T	Ford 9"	Eaton	Helical Gear	35 spline \$795
N1971	Ford 9"	Eaton	Locker	35 spline \$625
R542080	Ford 8.8	Auburn	H/D Cone	28 spline \$545
R542054	Ford 8.8	Auburn	H/D Cone	31 spline \$565
N1869	Ford 8.8	Eaton	H/D Clutch	31 spline \$495
N1869T	Ford 8.8	Eaton	Helical Gear	31 spline \$595
N1865	Ford 8.8	Eaton	Locker	31 spline \$745
N1882 **	Ford 8.8	Strange	Helical Gear	35 spline \$1,295
R542059	Ford 8"	Auburn	H/D Cone	28 spline \$580

\* Forged steel body \*\* Forged steel body (includes side bearings, races, & side shims)





#### GM 12 BOLT CAR / 10 BOLT 8.5 / 10 BOLT 8.2 / 10 BOLT 7.5 / 7.625 DIFFERENTIAL

R5087 *	*	12 bolt car	Eaton	H/D Clutch	30 spline\$480
R5086 *		12 bolt car	Eaton	H/D Clutch	30 spline\$480
R5087T		12 bolt car	Eaton	Helical Gear	30 spline\$498
R5091 *		12 bolt car	Yukon	H/D Clutch	33 spline\$625
R542018	2	10 bolt 8.5	Auburn	Std Cone	28 spline\$467
R5085		10 bolt 8.5	Eaton	H/D Clutch	28 spline\$510
R5085T		10 bolt 8.5	Eaton	Helical Gear	28 spline\$680
R542022		10 bolt 8.5	Auburn	Std Cone	30 spline\$485
R5083		10 bolt 8.5	Eaton	H/D Clutch	30 spline\$575
R5083T		10 bolt 8.5	Eaton	Helical Gear	30 spline\$545
R54206 R5084 R542060 R5084B	)	Chevy 8.2 Chevy 8.2 Buick / Olds / Pontiac 8.2 Buick / Olds / Pontiac 8.2		H/D Cone H/D Clutch H/D Cone H/D Clutch	28 spline \$545 28 spline \$560 28 spline \$545 28 spline \$680
R542057 R542044 R542046 R542046	4 )	10 bolt 7.5 10 bolt 7.5 10 bolt 7.5 10 bolt 7.5	Auburn Auburn Auburn Auburn	Std Cone H/D Cone Std Cone H/D Cone	26 spline \$467 26 spline \$565 28 spline \$467 28 spline \$545

<sup>\* 3</sup> series carrier

<sup>\*\*\* 3</sup> series carrier (Strange axles only)




<sup>\*\* 4</sup> series carrier

### DANA 60 / STRANGE S60 / MOPAR 8.75" SPOOL

D1547 *	Dana 60 / S60	Strange	L/W Steel Spool	25 enline	13.30 lbs \$190	
D1548 **	Dana 60 / S60	Strange	L/W Steel Spool	35 spline	13.20 lbs \$190	
D1544 *	Dana 60 / S60	Strange	L/W Steel Spool	40 spline	12.05 lbs \$280	
D1546 **	Dana 60 / S60	Strange	L/W Steel Spool	40 spline	12.05 lbs \$280	
D1545 **	Dana 60 / S60	Strange	Aluminum Spool	40 spline	7.00 lbs \$516	
D1556	Mopar 8.75"	Strange	L/W Steel Spool	30 spline	8.95 lbs \$190	
D1557	Mopar 8.75"	Strange	L/W Steel Spool	35 spline	8.35 lbs \$190	
D1566	Mopar 8.75"	Strange	Aluminum Spool	35 spline	4.50 lbs \$425	

<sup>\* 3</sup> series carrier



#### FORD 9" / FORD 8.8 SPOOL

D1515	Ford 9"	Strange	Steel Spool	28 spline	9.80 lbs \$150
D1512	Ford 9"	Strange	Aluminum Spool	28 spline	3.86 lbs \$150
D1516	Ford 9"	Strange	Steel Spool	31 spline	9.30 lbs \$150
D1513	Ford 9"	Strange	Aluminum Spool	31 spline	3.70 lbs \$150
D1553	Ford 9"	Strange	L/W Steel Spool	31 spline	8.50 lbs \$190
D1554	Ford 9"	Strange	L/W Steel Spool	33 spline	8.10 lbs \$190
D1518 *	Ford 9"	Strange	Steel Spool	35 spline	9.12 lbs \$150
D1555 *	Ford 9"	Strange	L/W Steel Spool	35 spline	8.20 lbs \$190
D1565 *	Ford 9"	Strange	Aluminum Spool	35 spline	3.95 lbs \$350
D2000 *	Ford 9"	Strange	L/W Steel Spool	40 spline	7.95 lbs \$280
D2002 **	Ford 9"	Strange	L/W H/D Steel Spool	40 spline	8.25 lbs \$280
D2004 **	Ford 9"	Strange	H/D Aluminum Spool	40 spline	4.85 lbs \$399
L6000J ***	Ford 9"	Strange	L/W H/D Steel Spool	36 spline	9.25 lbs \$385
D1558	Ford 8.8	Strange	L/W Steel Spool	31 spline	8.80 lbs \$190
D1560	Ford 8.8	Strange	L/W Steel Spool	33 spline	8.45 lbs \$190
D1567	Ford 8.8	Strange	L/W Steel Spool	35 spline	8.10 lbs \$190

<sup>\*</sup> For 3.250" bore aftermarket case



Aluminum Spool

# GM 12 BOLT CAR / 10 BOLT 8.5 / 10 BOLT 8.2 / '57-'64 OLDS / STRANGE DROP-OUT SPOOL

D1526	12 bolt car	Strange	Steel Spool	30 spline	10.85 lbs \$150	
D1551	12 bolt car	Strange	L/W Steel Spool	30 spline	9.35 lbs \$190	
D1540 *	12 bolt car	Strange	L/W Steel Spool	33 spline	8.85 lbs \$190	
D1549 **	12 bolt car	Strange	L/W Steel Spool	33 spline	8.85 lbs \$190	
D1530 ****	12 bolt car	Strange	Aluminum Spool	33 spline	4.20 lbs \$399	
D1542 *	12 bolt car	Strange	L/W Steel Spool	35 spline	8.20 lbs \$190	
D1541 **	12 bolt car	Strange	L/W Steel Spool	35 spline	8.20 lbs \$190	
D1522	10 bolt 8.5	Strange	Steel Spool	28 spline	10.24 lbs \$150	
D1523 ***	10 bolt 8.5	Strange	Steel Spool	30 spline	10.08 lbs \$150	
D1524 ***	10 bolt 8.5	Strange	Steel Spool	33 spline	9.68 lbs \$150	ļ
D1521 ***	10 bolt 8.2	Strange	Steel Spool	33 spline	9.46 lbs \$150	į
D1550	'57 - '64 Olds	Strange	L/W Steel Spool	35 spline	14.50 lbs \$219	
D1535	12 blt Drop-out	Strange	L/W Steel Spool	35 spline	7.68 lbs \$317	ļ

<sup>\* 3</sup> series carrier



Steel Spool

<sup>\*\* 5</sup> series carrier

<sup>\*\*</sup> For 3.812" bore aftermarket case

<sup>\*\*\*</sup> For 4.00" bore case in Drop-out Live Axle using 3.20 and numerically higher gear

<sup>\*\*\*</sup> Requires D1585 side bearing kit

<sup>\*\* 4</sup> series carrier \*\*\*\* 4 series - requires D1531 bearing kit

#### **FORD 9" ALUMINUMCASES**

Stock covers are stamped from thin sheet metal and are designed to close access to the housing internals while maintaining a leak-free seal. While this is sufficient under normal circumstances, increasing torque and horsepower can create unforeseen forces. The housing wants to flex at the opening where the cover attaches since it is the weakest section of the casting. The main caps are made of cast iron and are relatively thin and brittle. As forces mount and the case begins to deflect, ring and pinion life suffers as the contact pattern changes. Additional stress can lead to broken gear teeth as well as shattered main caps.


Chrome covers are purely for looks. Aluminum covers can be cosmetic, supportive, or both. Supportive covers are thick aluminum which reinforces the opening and makes the case much stiffer. They are also equipped with load bolts that contact the main caps increasing the threshold of when they would flex and break. The "ready for back-brace" LPW covers have additional bolt holes to accept their back-brace kit. This kit utilizes the cover to also support the housing tubes eliminating axle tube flex.

Main caps can be replaced with stronger alternatives, but will need to be fitted to the case. This process involves installing them in the housing so the bores can be measured. Since the bores will now be oversized, the main cap bases require milling to return the bore to the proper size. These caps are made of steel or aluminum. Quality aluminum main caps can be an advantage over steel as it is lighter and easier to machine. Under extreme conditions, such as a broken tooth caught between the ring and pinion, they can allow a little flex that might save the differential or spool from damage. These caps are not required for, and will not fit, a Strange S60 or Strange 12 bolt as they are already equipped with heavy duty main caps.

#### **COVERS / BILLET ALUMINUM MAIN CAPS**

#### **Dana 60 / S60**

STATE OF THE PARTY		
D3505	Spicer plain steel cover	Stock\$50
D3517	Strange S logo aluminum cover Black powder coat finish	Cosmetic\$95
D3509	LPW HD aluminum cover Ready for back-brace	Supportive\$169
D3515	LPW Axle tube back-brace kit	Chrome moly tubing\$120
H1122	Strange Dana 60 billet aluminum main caps with bolts	ı Requires machining\$95



LPW HD aluminum cover

#### **FORD 8.8**

R5233	LPW HD aluminum cover	Supportive\$169
R5234	LPW HD aluminum cover Ready for back-brace	Supportive\$169
R5209	LPW axle tube back-brace kit	Chrome moly tubing\$120
H1124	Strange Ford 8.8 billet aluminum main caps with bolts	n Requires machining\$95

LPW axle tube back-brace kit





LPW HD aluminum cover ready for back-brace

### FORD 9" ALUMINUM CASES

### **COVERS / BILLET ALUMINUM MAIN CAPS** Continued

## **GM 12 BOLT**

R5199 R5206	Chrome cover for passenger ca LPW HD car aluminum cover	r Cosmetic Supportive	
R5207	LPW HD car aluminum cover Ready for back-brace	Supportive	\$169
R5221	LPW HD truck aluminum cover Ready for back-brace	Supportive	\$169
R5209	LPW axle tube back-brace kit	Chrome moly tubing	
H1121	Strange 12 bolt car billet alumin		
	main caps with bolts	Requires machining	\$95

#### **GM 10 BOLT**

R5219	LPW HD 7.5 aluminum cover Ready for back-brace	Supportive\$169
R5201 R5203	LPW HD 8.2 / 8.5 aluminum cove LPW HD 8.2 / 8.5 aluminum cove Ready for back-brace	
R5209 H1120	LPW axle tube back-brace kit Strange GM 8.5 billet aluminum main caps with bolts	Chrome moly tubing
	main oupo with boits	moquinos masiminig

LABOR

H1123 Fit and install Strange billet aluminum main caps Labor only- parts extra......\$90



Steel cover



Chrome cover



Strange Ford 8.8 Billet aluminum main caps with bolts



Strange GM 8.5 Billet aluminun main caps with bolts

#### **FACTORY CAST IRON VS NODULAR IRON**

OEM Ford 9" cases were first made from cast iron only. This material was inexpensive, easy to pour, and offered acceptable strength for the time. Later, certain applications became more demanding and required a stronger case. More material was added in critical areas including additional webbing. Since cast iron tends to be brittle, a new material was also required. An agent was added to cast iron to create a stronger molecular bond. It made the case more ductile and less prone to breakage. The result was named "Nodular iron" and became the sought after case for heavy duty applications. During WW II, high strength materials were being diverted to military applications. While the casting design remained the same, the material reverted back to regular cast iron. These are often referred to as "WAR" cases. The factory main cap bore sizes are 2.891" and 3.062". The same casting was used for both cases, but some uses required bearings with a higher load capacity. There was a 9 3/8" case that has a 3.250" bore size. While its appearance is very similar to a Ford 9", and will bolt into the same housing, it was a short term item from Ford and parts are no longer available for it.



Strange's radial rib design significantly increases the rigidity of the case Strange Engineering's own blend of nodular iron contains more bonding additive which increases material strength by 8-10%. Coupled with strategical reinforcements to the pinion support area, tail bearing pocket, and main caps, it exceeds the strength of the factory nodular case. The 3.062" bore case will fit all differentials and spools from 28 to 33 spline. The 3.250" will fit 35 spline differentials and spools, and 40 spline spools requiring a 3.250" bore case. The pricing allows an individual to

purchase a new upscale case at a price of a used

and fatigued factory part.




### **S-SERIES NODULAR IRON**

N2205 3.062" bore case Nodular Iron main caps (27.2 lbs)...... \$249 N2206 3.250" bore case Nodular Iron main caps (27.2 lbs)...... \$249

#### STRANGE PRO SERIES NODULAR IRON

The Pro Series case is designed for maximum rigidity and strength where weight is not a primary concern. It can be identified by the stout horizontal and vertical ribs. As with all Strange engineering cases, "Strange" is embossed near the main cap area. Strange Engineering's proprietary form of nodular iron is used, which is 8-10% stronger than typical nodular iron. The Pro Iron case design features reinforcements to two critical areas: the pinion support area and the tail bearing pocket. The main caps are chrome moly and utilize high strength adjuster nuts. The 3.062" bore case will fit all differentials and spools from 28 to 33 spline. The 3.250" will fit 35 spline differentials and spools, and 40 spline spools requiring a 3.250" bore case.

#### **PRO SERIES NODULAR IRON**

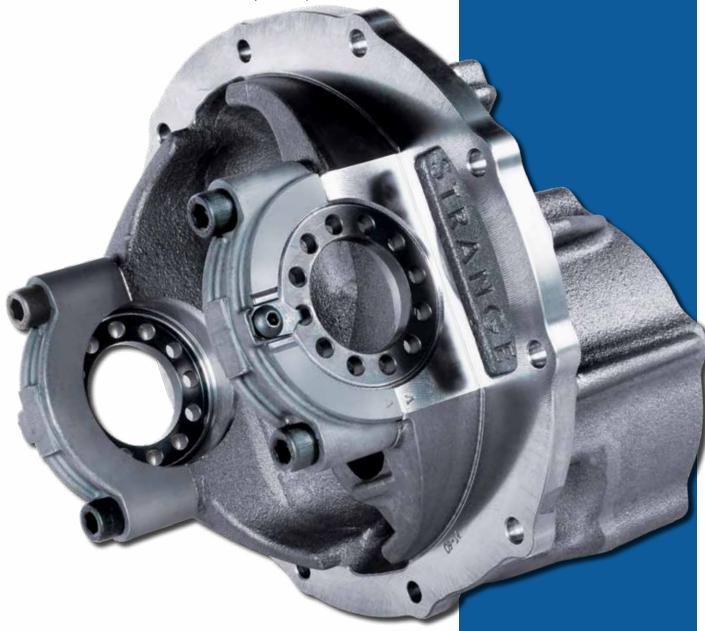

#### **FORD 9" ALUMINUM CASES**

#### **STRANGE LIGHTWEIGHT ALUMINUM CASE**

Lightweight aluminum cases are ideal for vehicles where unsprung weight is extremely critical and gear life is not a major concern. Dimensionally very similar to the Pro Iron case, but uses high tensile aluminum alloy and forged aluminum main caps. Since the case is responsible for holding together the gear set and spool, the application should be carefully considered before a purchasing this case. Typical Drag Race applications are Super Comp Dragsters, Altereds, and very lightweight cars. This case is not recommended for Street or Street/Strip. A Strange Engineering associate will be happy to assist you with your decision. Available bore sizes are 3.062" and 3.250".



#### LIGHTWEIGHT CASE

N1901	3.062" bore case	Aluminum	Case only (14.0 lbs)	\$380
N1901P	3.062" bore case	Polished Alum	Polished case only	\$595
N1904	3.250" bore case	Aluminum	Case only (13.9 lbs)	\$380
N1904P	3.250" bore case	Polished Alum	Polished case only	\$595

#### **STRANGE HD PRO ALUMINUM CASE**

The HD Pro aluminum case is designed for Drag Race applications and for the most abusive Hi-Performance street/strip applications. As with all Strange aluminum cases, it is crafted from 206-T4 heat treated aluminum. This premium aluminum has a 12% higher yield strength and a 32% higher tensile strength compared to commonly used 356-T6 aluminum. The billet aluminum pinion support has a unique oil channel that is machined 360° into the support to maximize oil flow to the pinion bearings as well as a large slot in the front to further boost oil circulation. The support is in contact with the bore of the case in two locations as opposed to one as found in normal cases. This additional contact area holds the pinion shaft much more securely resulting in better bearing and gear life. The tail bearing is oversized to handle more load and greater RPM than a stock tail bearing. Billet aluminum main caps encapsulate chrome-moly studs, provide the utmost support for the carrier bearings and significantly reduce ring gear deflection. This case is most commonly purchased in kit form due to some of the unique components. The kit contains the case, pinion support with races, support bolts and o-ring, depth shims, tail bearing and retainer plate. The remainder of the parts necessary for a complete unit are readily available. The kits are available in 3.062", 3.250", and 3.812" bore sizes, and for tapered or ball bearing pinion support. Bearings are not included in these kits other than the tail bearing. This case will accept 9" and 9 1/2" gear sets.



#### **HD PRO CASE**

N2300	3.062" bore case	Aluminum	Case only (6.8 lbs) Call For Price
N2300P	3.062" bore case	Polished Alum	Polished Case only Call For Price
N2303	3.250" bore case	Aluminum	Case only (16.8 lbs) Call For Price
N2303P	3.250" bore case	Polished Alum	Polished Case only Call For Price
N2307	3.812" bore case	Aluminum	Case only (15.7 lbs) Call For Price

### STRANGE ALUMINUM ULTRA CASE

The Ultra Case is the strongest case and pinion support combination offered for all out Drag Racing applications. The case is manufactured from 206-T4 and utilizes four chrome-moly studs encapsulated by billet aluminum main caps, allowing for shorter and stronger studs. The tail bearing is larger than factory, which can withstand greater rpm and is secured by a special retainer plate. The pinion support is retained by 12 bolts and a features a unique design which provides strength and optimizes bearing lubrication. It places both pinion bearings within the case and has a much tighter fit to the case bore. This firmly holds the pinion shaft in proper alignment with the ring gear, providing maximum gear life while avoiding gear bind. For Funny Car applications, a pinion support with a built-in coupler cover is offered as an option. The case has a provision to accept a load bolt (N1910) which helps support the ring gear during tire shake. It will accept 9", 9 1/2", and 10" gear sets. 10" gear sets require N1950HK spacer and bolt kit. The cases are packaged in kit form due to the unique components. The kit contains the case, pinion support, bolts, shims, bearings, races, spacers, o-ring, and seal. To build a complete center section, add a spool, gear set, and yoke or coupler. The case packages are available in 3.250", 3.812", and 4.00" bore sizes and are offered with either a tapered rear pinion bearing or a angular contact ball style bearing.



#### **ULTRA CASE**

N1902	3.250" bore case	Ultra Case only (21.4 lbs)	Call For Price
N1912	3.812" bore case	Ultra Case only (20.2 lbs)	Call For Price
N1912PS	3.812" bore case	Ultra Lightened For Pro Stock Case only-	
		For P/S ball bearing support (18.4 lbs)	Call For Price
N1913	4.000" bore case	Ultra Case only- For L6000 Live Axle (20.1 lbs)	Call For Price

#### **STRANGE 12 BOLT DROP-OUT ALUMINUM CASE**

The 12 bolt Drop-out aluminum case is designed to bolt into a Ford 9" housing and utilize a Chevy 12 bolt ring and pinion. It allows the builder to create a lightweight sheet metal housing, have the convenience of a center section, and benefit from the efficiency of a 12 bolt gear set. The application is a very light Drag Race Only vehicle that does not require the strength of a Ford 9" gear set, but can benefit from its lightweight housing. Since a 12 bolt gear is 2-3% more efficient than a comparable 9", horsepower loss is reduced resulting in improved top end performance. This case should not be used outside its application as increasing loads beyond its design will cause case deflection resulting in gear bind. Approaching gear bind will cause decreasing efficiency and poor gear life. It requires a Strange spool specifically designed for this unit, and may also require different axles. Consult a Strange Engineering representative to discuss your application.



#### **12 BOLT DROP-OUT CASE**

N1200	3.062" bore case	For Strange 30 or 33 spline spool (15.8 lbs)\$627
N1202	3.250" bore case	For Strange D1535 / D1537 35 spline spool (15.7 lbs)\$627

### **FORD 9" ALUMINUM CASES**

- 7075-T73 AEROSPACE ALUMINUM
   Superior strength & high stress resistance
- VIBRATORY STRESS RELIEVED
   Utilizing sub-harmonic vibrational energy
- SOLUTION HEAT TREATED
   Ensures consistent mechanical properties
- .650" THICK MOUNTING FLANGE Provides a rigid foundation
- RAISED CROSS RIB DESIGN
   Increases stiffness throughout unit
- WRAP AROUND DESIGN MAIN CAPS Enhances main cap strength and rigidity
- AISI 8740 STEEL BULLET END MAIN STUDS
   38% higher yield strength than typical chrome moly
   Allows increased clamping force on main caps
- MASSIVE WALL SECTIONS IN TAIL BEARING AREA Provides exceptional tail bearing support
- OIL SCAVENGING CHANNEL Enhanced pinion bearing lubrication
- EXTENSIVE LIGHTENING ON CASE AND SUPPORT Removes 1.5 lbs over comparable Ultra Case
- ARP 12 POINT PINION SUPPORT BOLTS
   Secure pinion support retention
- ACCEPTS 10" DEVELOPMENT GEAR SET True finished ring gear 0.D. 9.625"
- TYPE II ANODIZED FOR CORROSION PROTECTION
- EXTRA WIDE TAIL BEARING Increased load capacity
- BOLT-ON TAIL BEARING RETAINER
- JACK SCREW PROVISIONS
- DEDICATED 10" PINION SUPPORT AVAILABLE Eliminates pinion support spacer
- OPTIONAL LOAD BOLT
- OPTIONAL BILLET SPEED SENSOR HOLDER



#### **FORD 9" BILLET ALUMINUM CASE PACKAGES**

**THE BILLET CASE** and billet pinion support offer an unmatched strength to weight combination for the most brutal Drag Racing applications. The goal was to manufacture the finest billet case-regardless of material and process costs- and we have achieved that. The case is manufactured from 7075-T73 aerospace aluminum that offers superior strength and is highly resistant to stress corrosion. After initial rough machining, it is vibratory stress relieved utilizing sub-harmonic vibrational energy. This process stabilizes the heavily machined aluminum before proceeding. Afterwards, it is solution heat treated and artificially overaged. This ensures consistent mechanical properties throughout the material. The .650" thick mounting flange coupled with the raised cross rib design provides a solid structure to maintain proper alignment of the

ring and pinion. Unique wrap around style main caps enhance strength and stiffness. Each cap is retained by four AISI 8740 steel bullet end studs which have 38% higher yield strength than typical chrome moly. This allows for an increase in clamping loads further enhancing cap rigidity. The tail bearing area has massive wall sections to firmly retain the oversized tail bearing, which can withstand greater loads, and is secured by a special retainer plate. A large oil scavenging channel directs additional lubrication to the pinion support. The case has a provision to accept a load bolt which helps support the ring gear during tire shake. The case will accept 9", 9 1/2", and 10" gear sets. Integrated jack screws facilitate center section removal from the rear end housing.

**THE BILLET PINION SUPPORT** is manufactured from 2024-T351 aluminum and retained by 12 ARP twelve point bolts. The support

features a unique design which optimizes strength, weight reduction, and bearing lubrication. It places both pinion bearings within the case and has a much tighter fit to the case bore. This firmly holds the pinion shaft in proper alignment with the ring gear, providing

maximum gear life while avoiding gear bind. The 10" gear sets require a pinion support designed specifically for those gears. This support eliminates the need for a spacer between the support and the case, further contributing to the integrity of the assembly.



### **BILLET CASE PACKAGES**

P5381LB-10

P5381LT P5381LT-10	3.812" case Case & 9" / 9.5" support package with tapered pinion bearings using 35 spline pinion
P5381LB	3 812" case Case & 9" / 9 5" support package with hall pinjon bearing using 35 spline pinjon \$3 550.

3.812" case Case & 10" support package with ball pinion bearing using 35 spline pinion.....

### **FORD 9" ALUMINUM CASES**



#### **HD PRO CASE KITS**

P3200	3.062" case	Case & support kit for tapered pinion bearing	
P3203	3.250" case	Case & support kit for tapered pinion bearing	\$724
P3207	3.812" case	Case & support kit for tapered pinion bearing	\$724
P3200BB	3.062" case	Case & support kit for ball pinion bearing	\$739
P3203BB	3.250" case	Case & support kit for ball pinion bearing	
P3207BB	3.812" case	Case & support kit for ball pinion bearing	\$739

Kit includes case, pinion support with races, o-ring, support bolts, depth shims, tail bearing and retainer

### **HD PRO COMPLETION KITS**

R3200ST Completion kit for tapered bearing support using 28 spline pinion	\$105
R3200LT Completion kit for tapered bearing support using 35 spline pinion	\$110
56644564888888888888888888888888888	
R3200SB Completion kit for ball bearing support using 28 spline pinion	\$245
R3200LB Completion kit for ball bearing support using 35 spline pinion	\$275

Kit includes pinion bearings, preload assembly, pinion seal & nut, side bearings & races, and ring gear bolts

Case Kit with Completion Kit provide all necessary parts to build a complete center section less spool, gear set, and yoke or coupler



#### **ULTRA CASE PACKAGES**

\* Pinion support with built-in coupler cover

P3250ST P3250LT	3.250" Case & support package with tapered pinion bearings using 28 spline pinion	
P3250SB P3250LB	3.250" Lightened case & support package with ball pinion bearing using 28 spline pinion	
P3812ST P3812LT P3812LT-10 P3812LTC*	3.812" Case & support package with tapered pinion bearings using 28 spline pinion	049 088
P3812SBHD P3812LBHD P3812LCBHD	3.812" Case & support package with ball pinion bearing using 28 spline pinion	225
P3812SB P3812LB	3.812" Lightened case & support package with ball pinion bearing using 28 spline pinion	
P400LT P400LTC*	4.000" Case & support package with tapered pinion bearings using 35 spline pinion	

Package includes all necessary components to build a complete center section less spool, gear set, and yoke or coupler



### **FORD DAYTONA, STRANGE TAPERED & BALL BEARING**

#### **FORD DAYTONA PINION SUPPORTS**

N1914: Ford Daytona pinion supports are an option to replace the stock OEM unit. The stock support is made of nodular iron and uses the same size bearing front and rear. The N1914 is also constructed from cast iron, but uses a larger rear pinion bearing

for increased load capacity. The support is supplied with front and rear Timken races installed. O-ring and bearing & seal kit are available separately.

#### STRANGE TAPERED BEARING PINION SUPPORTS

N1917: Designed for heavy duty use in street / track applications that require a large rear pinion bearing, offering increased load capacity, while allowing greater oil flow for continuous operation. Constructed from billet aluminum, it will not shatter or crack like cast iron and is much lighter.

This support will accept 28 spline pinion gears and comes in a black anodized finish. It can also be ordered in polished aluminum. The support is supplied with front and rear Timken races installed, bolts, washers, and an o-ring. Bearing & seal kit is available separately.

N1922: Heavy duty Drag Race pinion support. It uses even larger front and rear pinion bearings than the Daytona or N1917, further increasing load capabilities to suit the most demanding requirements. Manufactured from billet aluminum, it offers better grain flow than billet aluminum supports. Oil channels have been reduced to allow more

material around the race sections to maximize rigidity. It can accept either 28 or 35 spline pinion gears, and comes in a clear anodized finish. A polished support is also available. The support is supplied with front and rear Timken races installed, bolts, washers, and an o-ring. Bearing & seal kit is available separately. Manufactured from 2024-T4 billet aluminum.

**N2322:** Designed specifically for the HD Pro aluminum case, it will not fit any other cases. The fresh design of this support make it ideal for use in street, track, and Drag Race applications. It utilizes the same oversized bearings as the N1922, but the oil flow is increased for continuous use. The pinion seal is retained by a snap ring ensuring it will not come loose under extreme conditions. Constructed from heat treated billet aluminum, ultimate strength is achieved

while weight is kept to a minimum. This support can accept either 28 or 35 spline pinion gears, and comes in a clear anodized finish. It can also be ordered in polished aluminum. The support is supplied with front and rear Timken races installed, bolts, washers, snap ring, and o-ring. Bearing & seal kits are available separately.

#### STRANGE BALL BEARING PINION SUPPORTS

Ball bearing supports use an angular contact ball bearing to replace the rear pinion bearing. This bearing offers reduced rolling resistance and requires less preload than a tapered bearing, decreasing the forces necessary to rotate the pinion gear. Pinion supports must be specifically designed for ball bearing use since tapered bearing supports are not adaptable.

N1920 / N1921: Can be used in any Ford 9" case, iron or aluminum, except for HD Pro and Ultra cases. They are manufactured from heat treated 2024 billet aluminum, offering strength and ductility, while remaining lightweight. The N1920 is designed for a 28 spline pinion gear, and the N1921 for a 35

spline. Both supports come complete with Timken race installed, front tapered bearing, rear angular contact ball bearing, adjustable preload assembly, low drag pinion seal, bolts, and o-ring.

**N2323:** Support designed for the HD Pro aluminum case. Machined from heat treated T6061 billet aluminum ensuring maximum strength and reduced weight. This support can accept 28 or 35 spline pinion gears with the proper bearing & seal kit. It

is supplied with a Timken front race installed, pinion support bolts & washers, and o-ring. Bearing & seal kit is available separately.

### **TAPERED BEARING SUPPORTS**

N1914	Daytona- Nodular Iron	Street / Track \$110
N1917	Billet Aluminum	HD Street / Track \$145
N1917P	Billet Aluminum- Polished	HD Street / Track \$187
N1922	Billet Aluminum	Drag Race\$135
N1922P	Billet Aluminum- Polished	Drag Race\$170
N2322	HD Pro Aluminum	HD Street / Track / Drag Race\$175
N2322P	HD Pro Aluminum- Polished	HD Street / Track / Drag Race\$275

All supports have Timken races installed. Supports include o-ring except for Daytona.









### **BALL BEARING SUPPORTS**

N1920*	Aluminum Support Package	Drag Race- For 28 spline pinion	\$315
N1921*	Aluminum Support Package	Drag Race- For 35 spline pinion	\$325
N2323	HD Pro Aluminum with race	Drag Race- For 28 or 35 spline	\$195

<sup>\*</sup> Bearing & Seal Kit included

### **RACES / O-RING**

N1914C	Front pinion race	For N1914 & N1917	
N1914B	Rear pinion race	For N1914 & N1917	
N1931	Front pinion race	For N1922, N2322, & N2323	
N1939	Rear pinion race	For N1922 & N2322	
N1958A	O-ring	For all supports listed above	



#### **BEARING & SEAL KITS\***

N1916 N1916PS N1923 N1924	For N1914 & N1917 OE (Non-Daytona) For N1922 & N2322 For N1922 & N2322	Using 28 spline pinionBearings, seal, & 2 pc preload spacer	\$75 \$80
N2323S	For N1920 & N2323	Using 28 spline pinionBearings, seal, 2 pc preload spacer, & adapter sleeve	
N2323L	For N1921 & N2323	Using 35 spline pinionBearings, seal, 2 pc preload spacer, & washer	

#### 9" IRON S-SERIES



#### S-SERIES CASE WITH DIFFERENTIAL

**PRF130:** The S-Series nodular iron case is a stout foundation for any Street / Track application. The package contains the S-series iron case, Ford cast iron Daytona pinion support, clutch style

posi unit, Standard gear, and S-series 1350 yoke with u-bolts. Upgrades to the differential, a billet aluminum pinion support, and chrome moly yoke are available.



PRF130	S-Series ca Standard ge	se / Iron Dayto ear set / S-Seri	na pinion support- N1914 / Clutch style 28-31 spline posi unit es 1350 yoke- U2203 / U-bolts	\$1,305
$\times\!\!\!\times\!\!\!\!\times$	Upgrades:	OPRF16	Upgrade to Strange black billet aluminum support- N1917	
$\times \times \times$	$\infty$	OPRF09	Upgrade to Eaton 28 or 31 spline Truetrack	Add \$200
$\times \times \times$	XXXX	OPRF17	Upgrade to Eaton 28, 31, or 35 spline Detroit Locker	Add \$165
	ノノノノ	OPRF11	Upgrade to Eaton 35 spline Truetrack	
		OPRF10	Upgrade to Strange 35 spline S-Trac- N1980	Add \$510
		OPRF07	Upgrade to Chrome moly pinion yoke- U1603	Add \$35
$\times\!\!\!\times\!\!\!\times$	$\times \times \times \times$	OPRF37	Upgrade to Chrome moly pinion yoke- U1603 Upgrade to HD cap kit for rear end yoke	Add \$73
PRF135	S-Series Ca	se / Iron Dayto	na pinion support- N1914 / 28-35 spline spool	
$\times\!\!\times\!\!\times$	Standard ge	ear set / S-Seri	es 1350 yoke- U2203 / U-bolts	\$1,144
XX	Upgrades:	OPRF16	Upgrade to Strange black billet aluminum support- N1917	Add \$29
XXX		OPRF07	Upgrade to Chrome moly pinion voke- U1603	Add \$35
		OPRF37	Upgrade to HD cap kit for rear end yoke	Add \$73





#### **PRO IRON CASE WITH DIFFERENTIAL**

**PRF120:** The Pro Iron nodular case is the strongest iron case available. This package contains the Pro Iron case, Ford cast iron Daytona pinion support, clutch style posi unit, Standard gear, and

S-series 1350 yoke with u-bolts. Upgrades to the differential, a Strange billet aluminum pinion support, and chrome moly yoke are available.

#### **PRO IRON CASE WITH SPOOL & YOKE**

**PRF105:** The Pro Iron is the ultimate in strength in a nodular iron case. This package contains the Pro Iron case, Strange billet aluminum support (N1922), 31 to 35 spline lightweight steel spool, Standard gear, and chrome moly 1350 yoke with

u-bolts. Upgrade is available to a 40 spline L/W steel spool. Options include a ball bearing pinion support, lightened ring gear, MicroBlue service, and computer pick-up collar.

**PRF115:** The Pro Iron nodular case is the foundation for this solid unit. This package contains the Pro Iron case, Strange billet aluminum support (N1922), 28 to 35 spline lightweight steel spool, 28 spline Pro gear, and chrome moly 1350 yoke

with u-bolts. Upgrades are available to a 35 spline Pro gear and 40 spline L/W steel spool. Options include a US Lightning Series gear, ball bearing pinion support, lightened ring gear, MicroBlue service, and computer pick-up collar.

#### **PRO IRON CASE WITH SPOOL & COUPLER**

**PRF100:** The Pro Iron nodular case surpasses the requirements for heavy duty iron case. This package contains the Pro Iron case, Strange billet aluminum support (N1922), 31 to 35 spline lightweight steel spool, Standard gear, and female coupler. Upgrade is

available to a 40 spline L/W steel spool. Options include a ball bearing pinion support, lightened ring gear, MicroBlue service, and computer pick-up collar.

**PRF110:** The Pro Iron nodular case is the basis for this formidable unit. This package contains the Pro Iron case, Strange billet aluminum support (N1922), 28 to 35 spline lightweight steel spool, 28 spline Pro gear, and female coupler. Upgrades are

available to a 35 spline Pro gear and 40 spline L/W steel spool. Options include a US Lightning Series gear, ball bearing pinion support, lightened ring gear, MicroBlue service, and computer pick-up collar.

PRF120	Pro Iron Case / Iron Daytona support- N1914 / Clutch style 28-31 spline posi unit	
	Standard gear set / S-Series 1350 yoke- U2203 / U-bolts	

Upgrades: OPRF16 Upgrade to Strange black billet aluminum support- N1917 .... Add \$29

OPRF07 Upgrade to Chrome moly pinion yoke- U1603 ............ Add \$35

PRF105 Pro Iron Case / Billet aluminum support- N1922 / 31-35

spline L/W steel spool Standard gear set / Chrome moly 1350 yoke-U1603 / U-bolts ......... \$1,298

Upgrades: OPRF01 Upgrade to 40 spline spool ......Add \$73

PRF115 Pro Iron Case / Billet aluminum support- N1922 / 31-35 spline L/W steel spool

28 spline Pro gear / Chrome moly 1350 yoke- U1603 / U-bolts ....\$1,434

Upgrades: OPRF05 Upgrade to 35 spline Pro gear ...... Add \$50

OPRF43 Upgrade to US Lightning Series gear ...... Add \$95
OPRF01 Upgrade to 40 spline spool ....... Add \$73

PRF100 Pro Iron Case / Billet aluminum support- N1922 / 31-35 spline L/W steel spool

Standard gear set / Female coupler ...... \$1,264

Upgrades: OPRF01 Upgrade to 40 spline spool ....... Add \$73

PRF110 Pro Iron Case / Billet aluminum support- N1922 / 31-35 spline L/W steel

spool 28 spline Pro gear / Female coupler ...... \$1,398

Options for all packages above

D3596	Lighten ring gear Add \$75
OPRF42	MicroBlue gear set and bearings Add \$400
OPRF03	Ball bearing support Add \$100
OPRF37	Upgrade to HD cap kit for rear end yoke Add \$73
U1613	1 magnet pick-up collar for 28 spline pinionAdd \$55
U1613-2	2 magnet pick-up collar for 28 spline pinionAdd \$57
U1613-4	4 magnet pick-up collar for 28 spline pinionAdd \$65
U1613-8	8 magnet pick-up collar for 28 spline pinionAdd \$134
U1614	1 magnet pick-up collar for 35 spline pinionAdd \$55
U1614-2	2 magnet pick-up collar for 35 spline pinionAdd \$57
U1614-4	4 magnet pick-up collar for 35 spline pinionAdd \$65
U1614-8	8 magnet pick-up collar for 35 spline pinionAdd \$134
N1927S	Sensor bracket for pinion support Add \$15





Our highly trained technicians are dedicated to provide the highest quality assembly that customers have grown to expect from Strange Engineering. Timken bearings and races are used throughout. The Gear set is hand massaged to remove sharp corners and burrs to provide quiet operation. Contact patterns are check and readjusted until satisfactory. Any questionable gear sets are returned to the manufacturer for evaluation and

the set-up process begins again. We believe the extra time is well spent because while some may advertise the fastest assembly time, we would rather deliver the best in quality and workmanship.

#### LIGHTWEIGHT ALUMINUM CASE WITH DIFFERENTIAL

**PRF170:** The Lightweight Aluminum case with a posi unit can be used where weight savings or cosmetic appearance is important and shock loads are minimal. Popular applications include lightweight street rods and show cars. It should not be used in Street / Strip applications as deflection can occur causing noise and poor gear life. This package contains the Lightweight aluminum case, Ford cast iron Daytona pinion support, clutch style posi unit,

Standard gear, and S-series 1350 yoke with u-bolts. Upgrades are available to the differential, a Strange billet aluminum pinion support (N1917), and chrome moly yoke. The PRF170P contains an upgraded pinion support, and polished case & support. The OPRF35S option to chromed chrome moly yoke is common for the PRF170P. For more demanding applications, consider using the HD Pro aluminum center section.

#### LIGHTWEIGHT ALUMINUM CASE WITH SPOOL & YOKE

PRF155: The Lightweight Aluminum case with a lightened steel spool and Standard gear set can be used where weight is critical, the vehicle is light, and impact loads are relatively low. Drag Race applications include 4-link Super Comp Dragsters, Altereds, Comp, and lightweight door cars. This package contains the Lightweight aluminum case, Strange billet aluminum pinion support (N1922), lightweight steel spool, Standard gear, and chrome moly 1350 yoke with u-bolts. The PRF155P contains a polished case and

PRF165: The Lightweight Aluminum case with a lightened steel spool and 28 spline Pro gear set can be used where weight reduction is more of a factor, and gear life might be less important. Popular Drag Race applications include 4-link Super Comp Dragsters, Altereds, Comp, and lightweight door cars. This package contains the Lightweight aluminum case, Strange billet aluminum pinion support (N1922), lightweight steel spool, 28 spline Pro gear, and chrome moly 1350 yoke with u-bolts. The PRF165P

support. Upgrades available are a 40 spline L/W steel spool or 35 spline aluminum spool. Options include a ball bearing pinion support, lightened ring gear, MicroBlue service, computer pick-up collar polished case and support, polished and chromed yoke, and aluminum yoke. Higher horsepower vehicles, especially those using a throttle stop, will opt for the PRF165 which contains a Pro gear. It is also very common to upgrade to a 40 spline L/W steel spool.

contains a polished case and support. Upgrades are available to a 35 spline Pro gear, 40 spline L/W steel spool, and 35 spline aluminum spool. Options include a US Lightning Series gear, ball bearing pinion support, lightened ring gear, MicroBlue service, computer pick-up collar, polished case and support, polished and chromed yoke, and aluminum yoke. For more abusive applications such as Top Dragster, consider using the HD Pro aluminum or Ultra Case to achieve maximum gear life.

#### 12 BOLT DROP-OUT ALUMINUM CASE WITH SPOOL & YOKE

**PRG500:** The 12 bolt aluminum Drop-out center section is designed to bolt into a Ford 9" housing and utilize a 12 bolt ring and pinion. This allows the builder to create a lightweight sheet metal housing, have the convenience of a center section, and benefit from the efficiency of a 12 bolt gear. The application is a very lightweight Drag Race Only vehicle that does not require the strength of a Ford

9" gear, but can appreciate its lightweight housing. Since a 12 bolt gear is 2-3% more efficient than a comparable 9", horsepower loss is reduced and an improvement realized in top end performance. This assembly should not be used outside its application since overloading will cause case deflection, gear bind, efficiency loss, and poor gear life. Upgrades available include a Pro gear, lightened ring gear, and MicroBlue service.

#### 9" LIGHTWEIGHT ALUMINUM WITH YOKE

		A second	6
			(
PRF170		: Aluminum case / Iron Daytona support- N1914 / Clutch style 28-31 spline andard gear set / S-Series 1350 yoke- U2203 / U-bolts	
PRF170P	Polished L/	W Aluminum case / Polished aluminum support- N1917P / Clutch style posi unit Standard gear set / S-Series 1350 yoke- U2203 / U-bolts \$1,745	-
Upgrades:	OPRF16 OPRF09 OPRF17 OPRF11 OPRF10 OPRF07	Upgrade to Strange black billet aluminum support- N1917Add \$29 Upgrade to Eaton 28 or 31 spline Truetrack	
PRF155		: Aluminum case / Billet aluminum support- N1922 / 31-35 spline L/W steel spoc ear set / Chrome moly 1350 yoke- U1603 / U-bolts\$1,369	ol
PRF155P	Polished L/	W Aluminum case / Polished aluminum support- N1922P / 31-35 spline L/W Standard gear set / Chrome moly 1350 yoke- U1603 / U-bolts	
Upgrades:	OPRF01 OPRF19	Upgrade to 40 spline spool	
PRF165	Lightweight	Aluminum case / Billet aluminum support- N1922 / 31-35 spline L/W steel	1

Options for all packages above OPRF19

Lighten ring gear ...... Add \$75 D3596 MicroBlue gear set and bearings ...... Add \$400 OPRF42 OPRF03 Ball bearing support- Not available in polished ...... Add \$100 OPRF35S Replace S-Series yoke with Chromed chrome moly yoke ..... Add \$100 OPRF35 Replace Chrome moly yoke with Chromed chrome moly yoke .... Add \$65 OPRF37 Upgrade to HD cap kit for rear end yoke ...... Add \$73 OPRF13 Replace Chrome moly yoke with Aluminum yoke ...... Add \$124 U1613 1 magnet pick-up collar for 28 spline pinion ...... Add \$55 U1613-2 2 magnet pick-up collar for 28 spline pinion ....... Add \$57 U1613-4 4 magnet pick-up collar for 28 spline pinion ...... Add \$65 U1613-8 U1614 

Upgrade to 35 spline aluminum spool ......Add \$140

PRG500 12 bolt Drop-out case / Ultra lite 35 spline steel spool

Standard gear set / Chrome moly 1350 yoke / U-bolts ......\$1,718

OPRF42 MicroBlue gear set & bearings ...... Add \$400

OPRF37 Upgrade to HD cap kit for rear end yoke ....... Add \$73





#### 9" LIGHTWEIGHT ALUMINUM WITH COUPLER



Our highly trained technicians are dedicated to provide the highest quality assembly that customers have grown to expect from Strange Engineering. Timken bearings and races are used throughout. The Gear set is hand massaged to remove sharp corners and burrs to provide quiet operation. Contact patterns are check and readjusted until satisfactory. Any questionable gear sets are returned to the manufacturer for evaluation and the set-up process begins again. We believe the extra time is well spent because while some may advertise the fastest assembly time, we would rather deliver the best in quality and workmanship.

#### LIGHTWEIGHT ALUMINUM CASE WITH SPOOL & COUPLER

**PRF150:** The Lightweight Aluminum case with a lightened steel spool and Standard gear set can be used where weight is critical, the vehicle is light, and impact loads are relatively low. Drag Race applications include solid mount Super Comp Dragsters and Altereds. This package contains the Lightweight aluminum case, Strange billet aluminum pinion support, lightweight steel spool, Standard gear, and female coupler. The PRF150P contains a

polished case and support. Upgrades are available to a 40 spline L/W steel spool or 35 spline aluminum spool. Options include a ball bearing pinion support, lightened ring gear, MicroBlue service, and computer pick-up collar. Current Super Comp vehicles that use a throttle stop will opt for the PRF160 which contains a Progear, and also upgrade to the 40 spline L/W steel spool.

**PRF160:** The Lightweight Aluminum case with a lightened steel spool and 28 spline Pro gear set can be used where minimal weight is of utmost importance. Most common Drag Race applications include solid mount Super Comp Dragsters and Altereds. The package contains the Lightweight aluminum case, Strange billet aluminum pinion support, lightweight steel spool, 28 spline Pro gear, and female coupler. The PRF160P contains a

polished case and support. Upgrades available are a 35 spline Pro gear, 40 spline spool, 35 spline aluminum spool, and ball bearing pinion support. Options include a US Lightning Series gear, lightened ring gear, MicroBlue service, and computer pick-up collar. For more extreme applications, check out the HD Pro aluminum or Ultra case assemblies.

#### 12 BOLT DROP-OUT ALUMINUM CASE WITH SPOOL & COUPLER

**PRG505:** The 12 bolt aluminum Drop-out center section is designed to bolt into a Ford 9" housing and utilize a 12 bolt ring and pinion. This allows the builder to create a lightweight sheet metal housing, have the convenience of a center section, and benefit from the efficiency of a 12 bolt gear. The application is a very lightweight Drag Race Only vehicle that does not require the strength of a Ford 9" gear, but can appreciate its

lightweight housing. Since a 12 bolt gear is 2-3% more efficient than a comparable 9", horsepower loss is reduced and an improvement realized in top end performance. This assembly should not be used outside its application since overloading will cause case deflection, gear bind, efficiency loss, and poor gear life. Upgrades available include a Pro gear, lightened ring gear, and MicroBlue service.

PRF150 Lightweight Aluminum case / 1922 Strange forged aluminum support 31-35 spline L/W steel spool / Standard gear set/ Female coupler	\$1,602 \$73 \$140 463 725
31-35 spline L/W steel spool / Standard gear set/ Female coupler	\$1,602 \$73 \$140 463 725
Upgrades: OPRF01 Upgrade to 40 spline spool	\$73 \$140 463 725 dd \$50
Upgrades: OPRF01 Upgrade to 40 spline spool	\$73 \$140 463 725 dd \$50
PRF160 Lightweight Aluminum case / 1922 Strange billet aluminum support 31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1, PRF160P Polished Lightweight Aluminum case / N1922P polished support 31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1, Upgrades: OPRF05 Upgrade to 35 spline 9" Pro gear	463 725 dd \$50
PRF160 Lightweight Aluminum case / 1922 Strange billet aluminum support 31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1, PRF160P Polished Lightweight Aluminum case / N1922P polished support 31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1, Upgrades: OPRF05 Upgrade to 35 spline 9" Pro gear	463 725 dd \$50
31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1, PRF160P Polished Lightweight Aluminum case / N1922P polished support 31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1, Upgrades: OPRF05 Upgrade to 35 spline 9" Pro gear	725 dd \$50
31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1, PRF160P Polished Lightweight Aluminum case / N1922P polished support 31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1, Upgrades: OPRF05 Upgrade to 35 spline 9" Pro gear	725 dd \$50
PRF160P Polished Lightweight Aluminum case / N1922P polished support 31-35 spline L/W steel spool / 28 spline Pro gear / Female coupler \$1,  Upgrades: OPRF05 Upgrade to 35 spline 9" Pro gear	725 dd \$50
Upgrades: OPRF05 Upgrade to 35 spline 9" Pro gear Ad	dd \$50
Of the To Opprove to Oo Lighthing Office year	14 400
OPRF01 Upgrade to 40 spline spool Ac	
OPRF19 Upgrade to 35 spline aluminum spool	
Options D3596 Lighten ring gear Ac	
for all OPRF42 MicroBlued gear set and bearings Ac	
packages OPRF03 Ball bearing support- Not available in polished	
above OPRF37 Upgrade to HD cap kit for rear end yoke Ac	10 \$73
U1613 1 magnet pick-up collar for 28 spline pinion Ad	dd \$55
U1613-2 2 magnet pick-up collar for 28 spline pinion Ac	
U1613-4 4 magnet pick-up collar for 28 spline pinion Ad	
U1613-8 8 magnet pick-up collar for 28 spline pinion Ad	ld \$134
U1614 1 magnet pick-up collar for 35 spline pinion Add \$	55
U1614-2 2 magnet pick-up collar for 35 spline pinion Add \$	
U1614-4 4 magnet pick-up collar for 35 spline pinion Add \$65	A MILES
U1614-8 8 magnet pick-up collar for 35 spline pinion Add \$134	
N1927S Sensor bracket for pinion support Add \$15	
PRG505 12 bolt Drop-out case / Ultra lite 35 spline steel spool	
Standard gear set / Female coupler\$1,653	
Ungradori ODDC01 Ungrado to Dra goos Add 600	
Upgrades: OPRG01 Upgrade to Pro gear	
OPRF42 MicroBlue gear set & bearings Add \$40	
OPRF37 Upgrade to HD cap kit for rear end yoke Add \$73	

9" LIGHTWEIGHT ALUMINUM WITH COUPLER





Our highly trained technicians are dedicated to provide the highest quality assembly that customers have grown to expect from Strange Engineering. Timken bearings and races are used throughout. The Gear set is hand massaged to remove sharp corners and burrs to provide quiet operation. Contact patterns are check and readjusted until satisfactory. Any questionable gear sets are returned to the manufacturer for evaluation and the set-up process begins again. We believe the extra time is well spent because while some may advertise the fastest assembly time, we would rather deliver the best in quality and workmanship.

#### HD PRO ALUMINUM CASE WITH DIFFERENTIAL

**PRF180:** The HD Pro Aluminum case equipped with a posi unit can be used where weight savings or cosmetic appearance is important without sacrificing any gear life. In fact, gear life is increased over OEM cast and nodular iron units due to the rigidity of this case and pinion support design. This allows use of an aluminum case in applications that would normally be considered too heavy or abusive.

Popular applications include street, Street / Track, Road Race, and many others. This package includes the HD Pro case and support, clutch style posi unit, Standard gear, and S-series 1350 yoke with u-bolts. Upgrades are available to the differential and to a chrome moly yoke. Options include a polished case and support, and a polished and chromed chrome moly yoke.

#### **HD PRO ALUMINUM CASE WITH SPOOL & YOKE**

**PRF184:** The HD Pro Aluminum case with a lightweight steel spool and Standard gear is used where weight savings and gear life are both very important. This case will offer greater gear life than OEM cast and nodular iron units, while drastically reducing weight. A typical application is a Drag race vehicle that is still able to get sufficient life out of a Standard gear. This package includes the HD Pro case and support, lightweight steel spool, Standard gear, and

**PRF188:** The HD Pro Aluminum case with a lightweight steel spool and 28 spline Pro gear is used where weight savings and gear life are both very important, and shock loads are too high for a Standard gear. The case and pinion support design offer a very stout foundation to support the spool and gear set. The oversized tail bearing offers more pinion support. Typical Drag Race applications are fast Door cars, Dragsters that run in both Super Comp and Top Dragster, and Top Sportsman vehicles. This package includes the

PRF192: This center section features a HD Pro Aluminum 3.812" bore case and a special heavy duty lightened 40 spline steel spool. The spool has a thicker wall on the bearing journal to eliminate any possibility that the journal could collapse under extreme conditions. It has extended internal splines which allow the continued use of the same 40 spline axles, even if replacing a competitors 40 spline center section. The case, pinion support, and spool design create a ridged fixture to keep the ring and pinion in proper alignment.

a chrome moly 1350 yoke with u-bolts. Upgrades available are a 40 spline L/W steel spool or 35 spline aluminum spool. Options include a ball bearing pinion support, lightened ring gear, MicroBlue service, computer pick-up collar, polished case and support, polished and chromed yoke, aluminum yoke, and load bolt. If shock loads are going to be more extreme, the PRF188 would be the better choice since it contains a Pro gear.

HD Pro case and support, lightweight steel spool, 28 spline Pro gear, and a chrome moly 1350 yoke with u-bolts. Upgrades are available to a 35 spline 9" Pro gear, 9 1/2" Pro gear, 40 spline L/W steel spool, and 35 spline aluminum spool. Options include a US Lightning Series gear, ball bearing pinion support, lightened ring gear, MicroBlue service, computer pick-up collar, polished case and support, polished and chromed yoke, aluminum yoke, and load bolt.

The oversized tail bearing further adds to the support of the pinion. This package includes the HD Pro case and support, HD lightened 40 spline steel spool, 28 spline Pro gear, and a chrome moly 1350 yoke with u-bolts. Upgrades available are a 35 spline Pro gear, 9 1/2" Pro gear, and 40 spline aluminum spool. Options include a US Lightning Series gear, ball bearing pinion support, lightened ring gear, MicroBlue service, computer pick-up collar, polished case and support, a polished and chromed yoke, aluminum yoke, and load bolt.

### 9" HD PRO ALUMINUM WITH YOKE

PRF180		ninum case and support / Clutch style 28-31 spline posi unit ar set / S-Series 1350 yoke- U2203 / U-bolts \$1,659	0
Upgrades:	OPRF09 OPRF17 OPRF11 OPRF10 OPRF07	Upgrade to Eaton 28 or 31 spline Truetrack	
PRF184		inum case and support / 31-35 spline L/W steel spool ar set / Chrome moly 1350 yoke- U1603 / U-bolts \$1,538	
Upgrades:		Upgrade to 40 spline L/W steel spool- D2000 Add \$73 Upgrade to 35 spline aluminum spool- D1565 Add \$140	
PRF188		num case and support / 31-35 spline L/W steel spool gear / Chrome moly 1350 yoke- U1603 / U-bolts \$1,689	
Upgrades:	OPRF52 U OPRF43 U OPRF01 U	Upgrade to 35 spline 9" Pro gear	Add \$170 Add \$95 Add \$73
PRF192		" bore aluminum case and support / D2002 HD 40 spline L/W steel gear / U1603 chrome moly 1350 yoke / U-bolts	
Upgrades:	OPRF52	Upgrade to 35 spline 9" Pro gear Upgrade to 35 spline 9 1/2" Pro gear Upgrade to US Lightning Series gear	Add \$170
Options for all package above	OPRF33 OPRF34 OPRF37 OPRF35S OPRF35 OPRF13 N1910H	Lighten ring gear	Add \$400 Add \$100 Add \$75 Add \$73 Add \$100 Add \$65 Add \$124 Add \$39
	U1613 U1613-2 U1613-4 U1613-8	3 - 1 - 1 - 1 - 1	Add \$57 Add \$65
	U1614 U1614-2 U1614-4 U1614-8	1 magnet pick-up collar for 35 spline pinion	Add \$57 Add \$65
	N2300S	Sensor bracket for HD Pro pinion support	



#### 9" HD PRO ALUMINUM WITH COUPLER



highest quality assembly that customers have grown to expect from Strange Engineering. Timken bearings and races are used throughout. The Gear set is hand massaged to remove sharp corners and burrs to provide quiet operation. Contact patterns are check and readjusted until satisfactory. Any questionable gear sets are returned to the manufacturer for evaluation and the set-up process begins again. We believe the extra time is well spent because while some may advertise the fastest assembly time, we would rather deliver the best in quality and workmanship.

#### **HD PRO ALUMINUM CASE WITH SPOOL & COUPLER**

PRF182: The HD Pro Aluminum case with a lightweight steel spool and Standard gear is used when weight savings and gear life are both very important. This case will offer much greater gear life than OEM cast and nodular iron units, while drastically reducing weight. A typical application is a Dragster or Altered that is still able to get sufficient life out of a Standard gear. This package includes the HD Pro case and support, lightweight

steel spool, Standard gear, and female coupler. Upgrades available are a 40 spline L/W steel spool or 35 spline aluminum spool. Options include a ball bearing pinion support, lightened ring gear, MicroBlue service, computer pick-up collar, polished case and support, and load bolt. If shock loads are going to be more extreme, the PRF188 which contains a Pro gear would be the better choice.

**PRF186:** The HD Pro Aluminum case with a lightweight steel spool and 28 spline Pro gear is used when weight savings and gear life are both very important and shock loads are too high for a Standard gear. The case and pinion support design offer a very stout foundation to support the spool and gear set. The tail bearing is oversized further adding to the support of the pinion. Solid mount Dragsters and Altereds are the most common applications. This package includes the HD Pro case and

support, lightweight steel spool, 28 spline Pro gear, and female coupler. Upgrades are available including a US Lightning Series gear, 35 spline 9" Pro gear, 9 1/2" Pro gear, 40 spline spool, and 35 spline aluminum spool. Options include a ball bearing pinion support, lightened ring gear, MicroBlue service, computer pickup collar, polished case and support, and load bolt. For extreme conditions such as Alcohol Dragster or Funny Car, the PRF190 would be the better choice due to the spool design.

PRF190: This center section features a HD Pro Aluminum 3.812" bore case and a special heavy duty lightened 40 spline steel spool. The spool has a thicker wall on the bearing journal to eliminate any possibility that the journal could collapse under extreme conditions. It has extended internal splines which allow the continued use of the same 40 spline axles, even if replacing a competitor's 40 spline center section. The case, pinion support, and spool design create a ridged fixture to keep the ring and pinion in proper alignment. The oversized tail bearing further adds to the support of the pinion. This package includes the HD Pro case and support, HD lightened 40 spline steel spool, 28 spline Pro gear, and female coupler. Upgrades available are a 35 spline 9" Pro gear, 9 1/2" Pro gear, and 40 spline aluminum spool. Options include a US Lightning Series gear, ball bearing pinion support, lightened ring gear, MicroBlue service, computer pick-up collar, polished case and support, and load bolt.

PRF182 HD Pro aluminum case and support / 31-35 spline L/W steel spool Standard gear set / Female coupler ...... \$1,508

**Upgrades:** OPRF01 Upgrade to 40 spline L/W steel spool- D2000 ..... Add \$73

OPRF19 Upgrade to 35 spline aluminum spool- D1565 ..... Add \$140

PRF186 HD Pro aluminum case and support / 31-35 spline L/W steel spool

28 spline Pro gear / Female coupler ...... \$1,654

Upgrades: OPRF05 Upgrade to 35 spline 9" Pro gear ...... Add \$50

OPRF52 Upgrade to 35 spline 9 1/2" Pro gear ............ Add \$170
OPRF43 Upgrade to US Lightning Series gear .............. Add \$95

OPRF01 Upgrade to 40 spline L/W steel spool- D2000 .... Add \$73
OPRF19 Upgrade to 35 spline aluminum spool- D1565 .... Add \$140

PRF190 HD Pro 3.812" bore aluminum case and support / 40 spline HD L/W steel spool- D2002 28 spline Pro gear / Female coupler .......\$1,737

Options for all packages above D3596 Lighten ring gear ...... Add \$75 OPRF42 MicroBlue gear set and bearings ...... Add \$400 OPRF03 Ball bearing pinion support- Not available in polished ...... Add \$100 OPRF33 OPRF34 OPRF37 Upgrade to HD cap kit for rear end yoke ...... Add \$73 N1910H Load bolt- Can not be used with lightened ring gear ...... Add \$39 U1613 1 magnet pick-up collar for 28 spline pinion ...... Add \$55 2 magnet pick-up collar for 28 spline pinion ...... Add \$57 U1613-2 4 magnet pick-up collar for 28 spline pinion ...... Add \$65 U1613-4 U1613-8 U1614 1 magnet pick-up collar for 35 spline pinion ...... Add \$55 U1614-2 4 magnet pick-up collar for 35 spline pinion ...... Add \$65 U1614-4 8 magnet pick-up collar for 35 spline pinion ...... Add \$134 U1614-8 N2300S Sensor bracket for HD Pro pinion support ...... Add \$15





#### 9" ULTRA WITH YOKE



Our highly trained technicians are dedicated to provide the highest quality assembly that customers have grown to expect from Strange Engineering. Timken bearings and races are used throughout. The Gear set is hand massaged to remove sharp corners and burrs to provide quiet operation. Contact patterns are check and readjusted until satisfactory. Any questionable gear sets are returned to the manufacturer for evaluation and the set-up process begins again. We believe the extra time is well spent because while some may advertise the fastest assembly time, we would rather deliver the best in quality and workmanship.

**ULTRA CASE DESIGN:** The Ultra case is used where maximum gear life is essential. This case and pinion support design move both pinion bearings into the case. This offers greater support than all other designs whereas the outer bearing sits outside the case. The pinion support has a tight fit to the case bore, further eliminating any flex that can occur. This coupled with the oversized tail bearing, firmly holds the pinion gear in proper alignment with the ring gear under the most extreme conditions. The massive billet aluminum main caps complete this maximum effort design. This case supports 9" and 9 1/2" gear sets, and can use 10" development gears with the proper pinion support. All Ultra cases have a provision to use an optional load bolt if required. Bore sizes available are 3.250" and 3.812". The 3.812" bore

Ultra case is designed for a heavy duty lightweight 40 spline steel spool that features a thicker wall on the bearing journal to eliminate the possibility of collapse under the most abusive conditions. It also allows the use of a aluminum 40 spline spool were applications permit. The 3.812" is available in a special lightened version with a ball bearing pinion support commonly used in Pro Stock cars. Ball bearing supports are an option on non-lighten cases as well. For a Funny car requiring a coupler cover, a support with a built-in cover is an option. A special 4.00" bore case is available to suit the Strange L6000 Drop-out Live Axle.

#### **ULTRA CASE WITH SPOOL & YOKE**

**PRF205:** This assembly includes a 3.250 bore Ultra case, billet aluminum pinion support, 35 spline lightweight steel spool, 28 spline Pro gear set, and a chrome moly 1350 yoke with u-bolts. Upgrades available are to a 40 spline L/W steel spool, 35 spline aluminum

spool, 35 spline 9" Pro gear, 9 1/2" Pro gear, and ball bearing pinion support. Options include a US Lightning Series gear, lightened ring gear, MicroBlue service, computer pick-up collar, aluminum 1350 yoke, and load bolt.

**PRF215:** This assembly includes a 3.812 bore Ultra case, billet aluminum pinion support, HD 40 spline lightweight steel spool, 28 spline Pro gear set, and a chrome moly 1350 yoke with u-bolts. Upgrades available are a ball bearing support, Lightened case with

ball bearing support, and 40 spline aluminum spool. Options include a US Lightning Series gear, MicroBlue service, computer pick-up collar, aluminum 1350 yoke, and load bolt.

**PRF225:** This assembly includes a 3.812 bore Ultra case, billet aluminum pinion support, HD 40 spline lightweight steel spool, 35 spline Pro gear set, and a chrome moly 1350 yoke with u-bolts. Upgrades available are a ball bearing support, Lightened case with

ball bearing support, and 40 spline aluminum spool. Options include a US Lightning Series gear, MicroBlue service, computer pick-up collar, chrome moly 1480 yoke, aluminum 1350 yoke, and load bolt.

75



9" ULTRA WITH YOKE

OPRF43 Option for US Lightning Series gear ...... Add \$95 **Options** D3596 Lighten ring gear ...... Add \$75 for all OPRF42 MicroBlue gear set and bearings ...... Add \$400 packages OPRF13 above OPRF37 Load bolt- Can not be used with lightened ring gear ...... Add \$39 N1910H U1613 U1613-2 2 magnet pick-up collar for 28 spline pinion ...... Add \$57 U1613-4 4 magnet pick-up collar for 28 spline pinion ...... Add \$65 8 magnet pick-up collar for 28 spline pinion ...... Add \$134 U1613-8 U1614 1 magnet pick-up collar for 35 spline pinion ...... Add \$55 2 magnet pick-up collar for 35 spline pinion ...... Add \$57 U1614-2 U1614-4 4 magnet pick-up collar for 35 spline pinion ...... Add \$65

8 magnet pick-up collar for 35 spline pinion ...... Add \$134

Sensor bracket for lightened case & ball support ...... Add \$22

U1614-8

N1952S

#### 9" ULTRA WITH COUPLER



Our highly trained technicians are dedicated to provide the highest quality assembly that customers have grown to expect from Strange Engineering. Timken bearings and races are used throughout. The Gear set is hand massaged to remove sharp corners and burrs to provide quiet operation. Contact patterns are check and readjusted until satisfactory. Any questionable gear sets are returned to the manufacturer for evaluation and the set-up process begins again. We believe the extra time is well spent because while some may advertise the fastest assembly time, we would rather deliver the best in quality and workmanship.

**ULTRA GASE DESIGN:** The Ultra case is used where maximum gear life is essential. This case and pinion support design move both pinion bearings into the case. This offers greater support than all other designs whereas the outer bearing sits outside the case. The pinion support has a tight fit to the case bore, further eliminating any flex that can occur. This coupled with the oversized tail bearing, firmly holds the pinion gear in proper alignment with the ring gear under the most extreme conditions. The massive billet aluminum main caps complete this maximum effort design. This case supports 9" and 9 1/2" gear sets, and can use 10" development gears with the proper pinion support. All Ultra cases have a provision to use an optional load bolt if

required. Bore sizes available are 3.250" and 3.812". The 3.812" bore Ultra case is designed for a heavy duty lightweight steel spool that features a thicker wall on the bearing journal to eliminate the possibility of collapse under the most abusive conditions. It also allows the use of a aluminum 40 spool were applications permit. The 3.812" is available in a special lightened version with a ball bearing pinion support commonly used in Pro Stock cars. Ball bearing supports are an option on non-lighten cases as well. For a Funny car requiring a coupler cover, a support with a built-in cover is an option. A special 4.00" bore case is available to suit the Strange L6000 Drop-out Live Axle.

#### **ULTRA CASE WITH SPOOL & COUPLER**

**PRF200:** This assembly includes a 3.250 bore Ultra case, billet aluminum pinion support, 35 spline lightweight steel spool, 28 spline Pro gear set, and female coupler. Upgrades available are to a 40 spline L/W steel spool, 35 spline aluminum spool, 35 spline 9" Pro

**PRF210:** This assembly includes a 3.812 bore Ultra case, billet aluminum pinion support, HD 40 spline lightweight steel spool, 28 spline Pro gear set, and female coupler. Upgrades available are a coupler cover support, ball bearing support, Lightened case with

**PRF220:** This assembly includes a 3.812 bore Ultra case, billet aluminum pinion support, HD 40 spline lightweight steel spool, 35 spline Pro gear set, and female coupler. Upgrades available are a coupler cover support, ball bearing support, Lightened case with

**PRF230:** This assembly includes a 4.00 bore Ultra case, billet aluminum pinion support, Live Axle 36 spline lightweight steel spool, 35 spline Pro gear set, and female coupler. Upgrades available are

gear, and 9 1/2" Pro gear. Options include a US Lightning Series gear, coupler cover support, ball bearing pinion support, lightened ring gear, MicroBlue service, computer pick-up collar, and load bolt.

ball bearing support, 40 spline aluminum spool, 35 spline 9" Pro gear, and 9 1/2" Pro gear. Options include a US Lightning Series gear, lightened ring gear, MicroBlue service, computer pick-up collar, and load bolt.

ball bearing support, 40 spline aluminum spool, and 9 1/2" Pro gear. Options include a US Lightning Series gear, lightened ring gear, MicroBlue service, computer pick-up collar, and load bolt.

a coupler cover support and 9 1/2" Pro gear. Options include a US Lightning Series gear, a lightened ring gear, MicroBlue service, computer pick-up collar, and load bolt.

			6
PRF200		case and support / 35 spline L/W steel spool- D1555 o gear / Female coupler\$1,771	
Upgrades:	OPRF01 OPRF05 OPRF52 OPRF26 OPRF31	Upgrade to 40 spline L/W steel spool- D2000 Add \$73 Upgrade to 35 spline 9" Pro gear	10
	OPRF19	Upgrade to Aluminum 35 spline spool- D1565 Add \$140	20
PRF210		case and support / 40 spline HD L/W steel spool- D2002 to gear / Female coupler \$1,861	•
Upgrades:	OPRF26 OPRF25 OPRF31 OPRF29	Upgrade to Ball bearing support	Add \$110 Add \$75
PRF220		case and support / 40 spline HD L/W steel spool- D2002 o gear / Female coupler	\$1,907
Upgrades:	OPRF23 OPRF26 OPRF25 OPRF31 OPRF29	Upgrade to 9 1/2" Pro gear	Add \$110 Add \$110 Add \$75
PRF230		case and support / Live Axle 36 spline lightweight steel spool o gear / Female coupler	\$2,100
Upgrades:	OPRF23 OPRF31	Upgrade to 9 1/2" Pro gear	
Options for all packages above	OPRF43 D3596 OPRF37 OPRF42 N1910F U1613- U1613-4 U1613-4	Lighten ring gear	Add \$73
	U1614 U1614-1 U1614-1 U1614-1 N1952S	4 4 magnet pick-up collar for 35 spline pinion Add \$65 8 8 magnet pick-up collar for 35 spline pinion Add \$134	
		•	

#### 9" BILLET ALUMINUM WITH YOKE



#### BILLET CASE & PINION SUPPORT DESIGN:

The billet case and pinion support provide unsurpassed support to the ring and pinion under the most extreme conditions. This case and pinion support design move both pinion bearings into the case. This offers greater support than other designs where the outer bearing sits outside the case. The billet pinion support is tightly fitted to the case bore, further eliminating any flex that can occur. This, coupled with the oversized tail bearing, firmly holds the pinion gear in proper alignment with the ring gear. The massive curved billet aluminum main caps

feature two extra studs to provide additional support against cap deflection. This case utilizes a support for 9" and 9 1/2" gear sets, or a 10" specific support. The billet case has a provision to use an optional load bolt if required. The 3.812" bore billet case is designed for a heavy duty lightweight steel spool that features a thicker wall on the bearing journal to eliminate the possibility of collapse under the most abusive conditions. A ball bearing support is available as an option.

#### **BILLET CASE WITH HD 40 SPOOL & YOKE**

**PRF425:** This assembly includes the Strange 3.812 bore Billet case, billet pinion support, sensor holder, HD 40 spline lightweight steel spool, 35 spline Pro gear set, and a chrome moly 1350 yoke with HD cap kit. A ball bearing support upgrade is available. Options include a 9 1/2" Pro gear, US Lightning Series gear, lightened ring gear, MicroBlue service, computer pick-up collar, additional sensor holder, 1350 billet yoke, 1480 billet yoke, and load bolt.

**PRF425-10:** This assembly includes the Strange 3.812 bore Billet case, 10" gear specific billet pinion support, sensor holder, HD 40 spline lightweight steel spool, 10" Pro gear set, and a 1350 chrome moly yoke with HD cap kit. A ball bearing support upgrade is available. Options include a US Lightning Series gear, lightened ring gear, MicroBlue service, computer pick-up collar, additional sensor holder, 1350 billet yoke, 1480 billet yoke, and load bolt.

#### **BILLET CASE WITH HD 40 SPOOL & COUPLER**

**PRF420:** This assembly includes the Strange 3.812 bore Billet case, billet pinion support, sensor holder, HD 40 spline lightweight steel spool, 35 spline Pro gear set, and a chrome moly female coupler. A ball bearing support upgrade is available. Options include a 9 1/2" Pro gear, US Lightning Series gear,, lightened ring gear, MicroBlue service, computer pick-up collar, additional sensor holder, and load bolt.

**PRF420-10:** This assembly includes the Strange 3.812 bore Billet case, 10" gear specific billet pinion support, sensor holder, HD 40 spline lightweight steel spool, 10" Pro gear set, and a chrome moly female coupler. A ball bearing support upgrade is available. Options include a US Lightning Series gear, lightened ring gear, MicroBlue service, computer pick-up collar, additional sensor holder, and load bolt.

#### 9" BILLET ALUMINUM WITH YOKE

PRF425 Billet 3.812 bore case, support & sensor holder / D2002 HD 40 spline lightweight steel spool 35 spline Pro gear set / U1604 chrome moly 1350

yoke / U1610HD cap kit...... \$4,395

OPRF26

Upgrade to 9 1/2" Pro gear..... Add \$140 **Upgrades:** OPRF23 Upgrade to 1350 Billet yoke..... Add \$160 OPRF08 Upgrade to 1480 Billet yoke..... Add \$160 OPRF20

PRF425-10 Billet 3.812" bore case / 10" specific support & sensor holder / D2002

HD 40 spline lightweight steel spool 10" Pro gear set / U1604 chrome

moly 1350 yoke / U1610HD cap kit...... \$5,045

OPRF08 Upgrades: Upgrade to 1350 Billet yoke...... Add \$160

OPRF20 Upgrade to 1480 Billet yoke...... Add \$160 OPRF26 Upgrade to Ball bearing support...... Add \$110

Upgrade to Ball bearing support...... Add \$110



Upgrade to Ball bearing support...... Add \$110 Upgrades: OPRF26

**Options** for all packages above

OPRF43 Option for US Lightning Series gear ...... Add \$95 D3596 Lighten ring gear..... Add \$75 OPRF42 MicroBlue gear set and bearings...... Add \$400 N1910T Load bolt - Can not be used with lightened gear...... Add \$39 U1614 1 magnet pick-up collar...... Add \$55 U1614-4 4 magnet pick-up collar...... Add \$57 U1614-8 8 magnet pick-up collar..... Add \$134 N1952T Additional Sensor holder...... Add \$30





# BARE HOUSING CENTERS: Bare housing centers are constructed from .141" mild steel with a heavy duty .282" face plate. Tube insertion locations are slotted to allow complete and secure welding of the tubes to the housing. Internal plates gusset the housing and provide internal support to the ends of the tubes. The cover is

designed to provide the clearance necessary for cases with heavy duty main caps and also allow the use of 9 1/2" gear sets. The H1110 housing center is designed to accept 3" 0.D. tubing and the H1112 is for 3 1/4". Both housing centers come equipped with 10 center section studs installed.

# WELDED HOUSINGS: All below housings begin with a Strange bare housing center as described above. Fill and drain plugs are installed to facilitate fluid changes. Your choice of .250" wall 3" or 3 1/4" mild steel tubing is installed deep into the housing until fully engaged into the internal gusset near the face plate. Using an alignment jig, the tubing is welded 360 degrees to the outside of the housing, along the housing slots, and to the internal gusset. The mounts are attached

to the jig and welded to the tubes. Lastly, the ends are welded after all other welding is complete to ensure perfect alignment with the center section. Some housings may be only available in a certain tube diameter limited by mount design. H1128N backbrace option is available on most housings. The brace would be installed prior to the housing ends.

# **HOUSING TUBED:** The housing is fitted with fill and drain plugs, and tubed with your choice of .250" wall 3" or 3 1/4" mild steel tubing. Larger tubing is stronger, but the intended mounts may dictate tube diameter. A housing like this is for the builder that will be installing

their own mounts and may also trim the tubing further. A welding jig will be required to install the housing ends after all other welding has been completed.

#### HOUSING WITH ENDS- NO MOUNTS: The housing

is fitted with fill and drain plugs, tubed with your choice of .250" wall 3" or 3 1/4" mild steel tubing, and choice of housing ends. Larger tubing is stronger, but the intended mounts may dictate tube diameter. Since the builder will be installing their own mounts, extreme care must be

taken during the welding process as housing end alignment can be compromised. An alignment jig should be used afterwards to ensure that warping did not occur.

#### **HOUSING WITH MOUNTS- NO ENDS:** The housing

is fitted with fill and drain plugs, tubed with your choice of .250" wall 3" or 3 1/4" mild steel tubing, and choice of mounts. Larger tubing is stronger, but many mounts are designed to fit a 3" tube. A builder might order this if they are unsure of the final width, or already has housing

ends and an alignment jig. It may also be the base for a housing that will use a floater kit. Purchased Strange floater spindles may be fitted and welded at an additional charge. A fully welded housing with spindles can also be ordered with an optional satin black powdercoat finish.

#### **HOUSING WITH ENDS AND MOUNTS:**

The housing is fitted with fill and drain plugs, tubed with your choice of .250" wall 3" or 3 1/4" mild steel tubing, and choice of mounts and housing ends. While larger tubing is stronger, the mounts selection may have determined tube diameter. This configuration is the safest way to maintain the proper alignment of the housing ends. The fixturing

and welding of the housing ends is always our last operation. For vehicles that will see very hard launches, there is an option to weld a back brace along the rear of the housing. It is designed to eliminate housing and tube flex that can occur under harsh conditions. An optional satin black powdercoat finish is also available.



H1110 H1112	HD bare housing center for use with 3" 0.D. tubes	
HF9 HF9E	HD housing tubed with fill and drain- No ends or mounts	
HF9L HF9LE	HD housing with fill, drain, and leaf spring mounts- No ends HD housing with fill, drain, leaf spring mounts, and ends	
HF9GA HF9GAE HF9GAM HF9GAME	HD GM A-body housing tubed with ears, fill, and drain- No mounts or ends HD GM A-body housing with ears, fill, drain, and ends- No mounts HD GM A-body housing with ears, fill, drain, and mounts- No ends	\$675 \$750
HF9GG HF9GGE HF9GGM HF9GGME	HD GM G-body housing tubed with ears, fill, and drain- No mounts or ends HD GM G-body housing with ears, fill, drain, and ends- No mounts HD GM G-body housing with ears, fill, drain, and mounts- No ends	\$714 \$750
HF9GBM HF9GBME HF9GB71M HF9GB71ME HF9GB77M HF9GB77ME	HD GM 59-70 B-body housing with fill, drain, and mounts- No ends	\$995 \$906 \$995 \$906
HF9LEG67C10M	HD GM Truck 67-72 C10 housing with fill, drain, trailing arm mounts, No ends IE HD GM Truck 67-72 C10 housing with fill, drain, trailing arm mounts, & ends.	\$636
	HD GM Truck 73-87 C10 housing with fill, drain, leaf spring mounts, No ends E HD GM Truck 73-87 C10 housing with fill, drain, leaf spring mounts, & ends	
	HD GM Truck 88-98 C15 housing with fill, drain, leaf spring mounts, No ends E HD GM Truck 88-98 C15 housing with fill, drain, leaf spring mounts, & ends	
HF9M86 HF9M86E HF9M86M HF9M86ME	HD Mustang 79-04 housing tubed with ears, fill, and drain- No mounts or ends HD Mustang 79-04 housing with ears, fill, drain, and ends- No mountsHD Mustang 79-04 housing with ears, fill, drain, and mounts- No endsHD Mustang 79-04 housing with ears, fill, drain, mounts, and ends	\$725
HF9M05 HF9M05E HF9M05M HF9M05ME	HD Mustang 05-14 housing tubed with ears, fill, and drain- No mounts or ends HD Mustang 05-14 housing with ears, fill, drain, and ends- No mounts	\$695 \$736
	HD Ford Truck 65-72 F100 housing with fill, drain, and mounts- No ends E HD Ford Truck 65-72 F100 housing with fill, drain, mounts, and ends	

Options

H1128N H1199P-BLK

H1130DF

H1130SF

Install back brace on new housing- Parts & Labor ............ \$230

Powder coat housing satin black ......\$159

Install Drag Race floater spindles- Labor only ...... \$275 Install Pro Touring floater spindles- Labor only ...... \$200



#### 9" ULTRA FAB



#### **ULTRA FABRICATED HOUSING CENTERS:**

Ultra Fabricated housing centers are constructed from .125" alloy steel with a heavy duty .375" face plate. Triangulated design provides rigid housing tube support for more consistent and straighter launches. Internal radial gusset plates brace end of housing tube and increase overall housing stiffness. Tube insertion locations are slotted for 5" to allow complete and secure welding of the tubes to the housing. The

housing is designed to provide the clearance necessary for cases with heavy duty main caps and also allowing the use of 9", 9 1/2", or 10" gear sets. The H1110UF housing center is designed to accept 3" OD tubing and the H1112UF is for 3 1/4". Both housing centers come equipped with center section studs installed.

**ULTRA FABRICATED HOUSINGS:** All housings below begin with a Strange Ultra Fabricated housing center as described above. Fill and drain plugs are installed to facilitate fluid changes. Your choice of .250" wall 3" or 3 1/4" mild steel tubing is installed deep into the housing until fully engaged into the internal gusset near the face plate. Using an alignment jig, the tubing is welded 360 degrees to the outside of the housing, along the housing slots, and to the internal

gusset. The mounts are attached to the jig and welded to the tubes. Lastly, the ends are welded after all other welding is complete to ensure perfect alignment with the center section. Some housings may be only available in a certain tube diameter limited by mount design. H1128N back brace option is available on most housings. The brace would be installed prior to the housing ends.

#### **ULTRA FABRICATED HOUSING TUBED:**

The housing is fitted with fill and drain plugs, and tubed with your choice of .250" wall 3" or 3 1/4" mild steel tubing. Larger tubing is stronger, but the intended mounts may dictate tube diameter. A housing like this is

for a builder that will be installing their own mounts and may also trim the tubing further. A welding jig will be required to install the housing ends after all other welding has been completed.

#### **ULTRA FABRICATED HOUSING WITH ENDS:**

The housing is fitted with fill and drain plugs, tubed with your choice of .250" wall, 3" or 3 1/4" mild steel tubing, and choice of housing ends. Larger tubing is stronger, but the intended mounts may dictate tube diameter. Since the builder will be installing their own mounts,

extreme care must be taken during the welding process as housing end alignment can be compromised. An alignment jig should be used afterwards to ensure that warping did not occur.

#### **ULTRA FABRICATED HOUSING WITH MOUNTS:**

The housing is fitted with fill and drain plugs, tubed with your choice of .250" wall 3" or 3 1/4" mild steel tubing, and choice of mounts. Larger tubing is stronger, but many mounts are designed to fit a 3" tube. A builder might order this if they are unsure of the final width, or already has housing ends and an alignment jig. It may also be the base for a

housing that will use a floater kit. To fit and weld purchased Strange floater spindles is available at an additional charge. A fully welded housing with spindles can also be ordered with an optional satin black powder coat finish.

#### **ULTRA FABRICATED HOUSING WITH ENDS**

**& MOUNTS:** The housing is fitted with fill and drain plugs, tubed with your choice of .250" wall, 3" or 3 1/4" mild steel tubing, and choice of mounts and housing ends. While larger tubing is stronger, the mounts selection may have determined tube diameter. This configuration is the safest way to maintain the proper alignment of the housing ends. The fixturing and welding of the housing ends is always

our last operation. For vehicles that will see very hard launches, there is an option to weld a back brace along the rear of the housing. It is designed to eliminate housing and tube flex that can occur under harsh conditions. An optional satin black powder coat finish is also available.

H1110UF H1112UF		using Center for use with 3" OD tubesusing Center for use with 3 1/4" OD tubes			
HF9UF HF9EUF		tubed with fill and drain- No ends or mountswith fill, drain, and ends- No mounts			
HF9LUF HF9LEUF		with fill, drain, and leaf spring mounts- No endswith fill, drain, leaf spring mounts, and ends		1111	Z
HF9GAUF HF9GAEUF HF9GAMUF HF9GAMEUF	Ultra Fab GM A-bo Ultra Fab GM A-bo	ody housing tubed with ears, fill, and drain- No mounts or ody housing with ears, fill, drain, and ends- No mounts ody housing with ears, fill, drain, and mounts- No ends ody housing with ears, fill, drain, mounts, and ends	\$1,175 \$1,250		<b>S</b> E
HF9GGUF HF9GGEUF HF9GGMUF HF9GGMEUF	Ultra Fab GM G-bo Ultra Fab GM G-bo	ody housing tubed with ears, fill, and drain- No mounts or ody housing with ears, fill, drain, and ends- No mounts ody housing with ears, fill, drain, and mounts- No ends ody housing with ears, fill, drain, mounts, and ends	\$1,214 \$1,250		
HF9GBMUF HF9GBMEUF		ody 65-70 housing with fill, drain, and mounts- No ends ody 65-70 housing with fill, drain, mounts, and ends			
HF9M86UF HF9M86EUF HF9M86MUF HF9M86MEUF	Ultra Fab Mustanç Ultra Fab Mustanç	g 79-04 housing tubed with ears, fill, and drain- No mounts g 79-04 housing with ears, fill, drain, and ends- No mounts g 79-04 housing with ears, fill, drain, and mounts- No ends g 79-04 housing with ears, fill, drain, mounts, and ends	\$1,2 \$1,2	225 236	
HF9M05UF HF9M05EUF HF9M05MUF HF9M05MEUF	Ultra Fab Mustanç Ultra Fab Mustanç	g 05-14 housing tubed with ears, fill, and drain- No mounts g 05-14 housing with ears, fill, drain, and ends- No mounts g 05-14 housing with ears, fill, drain, and mounts- No ends g 05-14 housing with ears, fill, drain, mounts, and ends	\$1,7	195 236	
Options	H1128N H1199P-BLK	Install back brace on new housing- Parts & Labor \$23 Powder coat housing satin black\$159			
	H1130DF H1130SF	Install Drag Race floater spindles- Labor only \$275 Install Pro Touring floater spindles- Labor only \$200		1	
				tante	
		8 13			

## 9" MODULAR 4-LINK DRAGSTER FLOATER REAR END



This Strange modular rear is specifically designed for Dragsters. The lightweight aluminum housing features the same rigid design as used in our Pro Mod rear ends. The 11 1/2" floating

stainless steel brake rotors and Strange billet calipers provide long rotor life, maximum clamping force and excellent braking characteristics.

The floater version offers the best in safety as the axles provide only the rotational forces to the drive plates and wheel studs. Any other forces, such as tire shake, are transmitted from the hubs to the housing. This eliminates the possibility of loosing a tire and wheel due to an axle flange failure.

The flanged axle version is supplied with Hy-Tuf 40 spline axles. The axle shafts are fully gun-drilled from end to end and feature the Ultra Lite flange option. This option not only removes material from the flange, but goes a step further to include the area underneath the logo forming a funnel shape. This process is only possible with a professional thru hardened pro race axle. The axle bearings are oversized low friction ball bearings retained by custom wide and thick wedding rings to ensure proper axle retention.

Since both housings share the same center piece, the external components can be changed for future requirements. The flanged axle version can be changed to a floater, 16" four link centers can become 17", and 32" wheel to wheel can be increased to 33"

#### 9" MODULAR 4-LINK DRAGSTER FLANGED AXLE REAR END

- Lightweight and compact configuration
- 11.50" rotor diameter for increased braking vs. standard 11.250" rotor
- Stainless 2-piece floating brake rotor for the most demanding and abusive braking applications
- Strange billet aluminum calipers and billet steel pistons for maximum stiffness & clamping force
- Billet calipers feature unique o-ring grooves for consistent piston retraction
- Premium 206-T4 aluminum housing accepts 9", 9.50" and 10" development ring gears
- Rigid rear end design for increased gear life and consistent reaction
- Ribbed faceplate further enhances housing rigidity
- Lugged 4-link plates eliminates mounting hole elongation- prevents 4-link rotation
- Aluminum bottom 4-link brace included
- Integral wheelie bar mounts
- Black Enduraguard finish prevents corrosion and allows for easy cleaning
- Large ergonomic filler cap
- Available in 16" or 17" 4-link centers
- 32" or 33" wheel to wheel
- Choice of 4 3/4" or 5" bolt circle
- Includes pair of 40 spline gun-drilled axles
- Center housing is the same for both the floater and flanged axle versions
- Replacing outer components can change version, 4-link centers, & wheel to wheel widths

(Mounting plates & center section sold separately)

H1250MPK1 4-Link mounting plate kit....... \$550



**DRAGSTER / ALTERED:** These housings are available in 26" or 27" widths with the pinion in the center. The 26" housing using Olds brake offset axles would result in 31.664" bare axle flange to axle flange, while the 27" would provide a 32.664" width. The 26" housing using special brake brackets would allow use of axles with an Early Big Ford offset of 2.332", achieving 30.664" bare axle flange to flange. Add your rotor hat thickness to determine your final wheel to wheel.


Housings ordered in solid mount are supplied with your choice of three plate designs. The distance between the 3/8" thick plates can be anywhere from 14 3/8" to 17" measured from inside of plate to inside of plate. 4-Link versions are limited to 17" centers and do not include the mounting plates. Chrome moly mounting plates are available separately.

Housing H1151 H1161	Dragster / Altered 26" housing on 17" centers for use with 4-Link plates Dragster / Altered 27" housing on 17" centers for use with 4-Link plates	
Option	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	8888888
H1150PH4	4-Link plate for H1151 / H1161 housing- 4 plates required	\$45 each
Housing		$\times$
H1152 H1162	Dragster / Altered 26" solid mount housing with choice of plates	\$908 \$908

#### THE HOUSING ADVANTAGE:

Aluminum housings are more than just light. They allow thoughtful design to place more material where it is needed, and less where its not. The result is a housing that is extremely strong, but as light as possible. The casting receives an EnduraGuard coating before the machining process. This durable and attractive black finish resists corrosion, and is easy to keep clean. It also provides a good base for powdercoating for those who wish to change the color on their own. The housing is placed in a dedicated machining center which performs all operations start to finish. The advantage is a housing within tolerances that can't be achieved by a welded housing, providing precise alignment of the center section, axles, and brakes. They are also equipped with upper and lower mounting bosses to attach a chute or antirotational device. The housing features the EnduraGuard coating, fill plug, drain plug, and arrives with center section studs already installed.



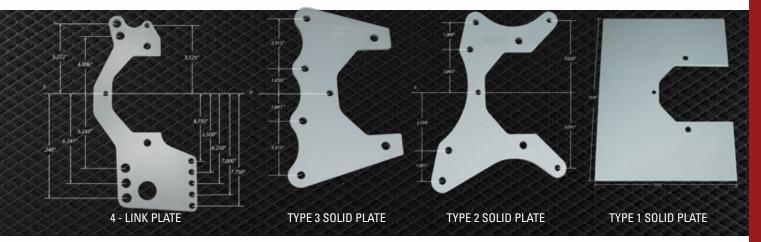

#### **POPULAR COMBINATIONS**

#### **COMPLETE SOLID MOUNT REAR END**


- Aluminum housing with solid mount plates
- 35 Spline pro race axles with 5/8" studs
- L/W alum center section with 3.40-4.86 Pro gear
- Pro Series rear brake kit with slotted rotors \$3,626
- Aluminum housing with solid mount plates
- 40 Spline gundrilled pro race axles with 5/8" studs
- HD Pro alum center section with 3.40-4.86 Pro gear
- Pro Series rear brake kit with slotted rotors \$4,029

#### **COMPLETE 4 LINK REAR END**

- Aluminum housing with 4-link plates
- 35 Spline pro race axles with 5/8" studs
- L/W alum center section with 3.40-4.86 Pro gear
- Pro Series rear brake kit with slotted rotors \$3,773
- Aluminum housing with 4-link plates
- 40 Spline gundrilled pro race axles with 5/8" studs
- HD Pro alum center section with 3.40-4.86 Pro gear
- Pro Series rear brake kit with slotted rotors
   \$4.176



#### 9" ALUMINUM ULTRA 4-LINK

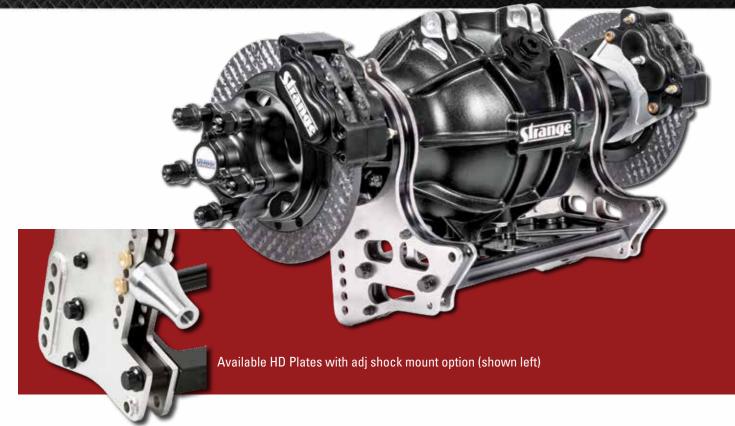

**PRO MOD:** These housings are designed for the most brutal Pro Mod applications. They are designed to accept an Ultra Case, HD Pro, or most heavy duty aftermarket cases. The housing has clearance to use 9", 9 1/2", and 10" development gear sets. The huge filler cap opening allows for inspection of the ring gear teeth without removing the center section. The drain plug features a magnet to retain harmful metallic particles. The upper wheelie bar mounts are cast directly into the main housing. These housings are available in 16", 17", 18", 19",

20", 21", 22", & 23" 4-Link centers. Chrome moly 4-Link mounts are not included but are available separately. The included floater hubs and drive plates can be ordered in 4 3/4", 5", or 5 1/2" bolt circle. Carbon brake housings come complete with 11" rotors, caliper mounts, calipers, and pads. Steel brake housings now have 11.5" stainless steel rotors, caliper mounts, calipers, and brake pads. Floater axles are in the Floater Kit section, while center sections choices are listed with the HD Pro, Ultra, & Billet Case assemblies.

**MODULAR 4-LINK:** This housing comes in at the same weight as many Pro Stock fabricated steel housings, but doesn't flex under launch as they are prone to. The same ridged main housing is used as the Pro Mod rear, but accepts the Strange two piece axle assemblies. This combination provides alignment accuracies that are unobtainable with a welded housing, while ensuring free rotation of the axle assemblies. Designed to accept an Ultra Case, HD Pro, or most heavy duty aftermarket cases, the housing is clearanced to use 9", 9 1/2", and 10" development gear sets. The huge filler cap opening allows for inspection of the ring gear teeth without removing the center

section. The drain plug features a magnet to retain harmful metallic particles. The upper wheelie bar mounts are cast directly into the main housing. These housings are available in 16", 17", 18", 19", 20", 21", 22", & 23" 4-Link centers. Chrome moly 4-Link mounts are not included but are available separately. This housing is also packaged for those who already own the proper length Strange two piece axle kit and carbon brakes. It is supplied with special carbon caliper mounts to adapt to this housing. Center sections appropriate for this housing are listed with the HD Pro, Ultra, & Billet case assemblies.

THE HOUSING ADVANTAGE: The Ultra 4-Link Rear- Not Just your ordinary professional aluminum rear end! The strange Ultra Rear was specifically designed to meet the needs of the most abusive and demanding racers. The core of the Ultra Rear is crafted from superior 206-T4 heat treated aluminum. The premium aluminum has a 12% higher yield strength and a 32% higher tensile strength, compared to commonly used 356-T6 aluminum. In addition, the Strange casting is further enhanced by hot isostatic pressing (HIP). The HIP process subjects the casting to elevated temperatures and isostatic pressure which reduces or eliminates casting voids and microshrinkage, maximizes strength and ductility, and dramatically improves fatigue

life. The HIP process is used in the aerospace industry and is not inexpensive, but is necessary when manufacturing an unrivaled rear end. Fully machined lightweight aluminum housing and components ensures precise alignment of wheels, as opposed to compromised welded steel housings, which are subject to heat distortion. Fully ribbed rigid housing design reduces deflection induced by hard launches and tire shake. The bottom brace is extended in close proximity to the shock mount for better support and the lower wishbone mount is designed for double shear loading vs. cantilever bending. The aluminum housing is coated with EnduraGuard, which offers unmatched corrosion protection and an attractive black finish.

# 9" ALUMINUM ULTRA 4-LINK

# PRO MOD HOUSING (Floater Housing)

16" 4 Link Centers	17" 4 Link Centers	18" 4 Link Centers	19" 4 Link Centers
31.75" WTW	32.75" WTW	33.75" WTW	34.75" WTW
33.25" WTW	34.25" WTW	35.25" WTW	36.25" WTW
33.75" WTW	34.75" WTW	35.75" WTW	36.75" WTW
41.00" WTW*	42.00" WTW*	43.00" WTW*	44.00" WTW*

<sup>\* 4 3/4&</sup>quot; & 5" BC'S ONLY

20" 4 Link Centers	21" 4 Link Centers	22" 4 Link Centers	23" 4 Link Centers
35.75" WTW	36.75" WTW	37.75" WTW	38.75" WTW
37.25" WTW	38.25" WTW	39.25" WTW	40.25" WTW
37.75" WTW	38.75" WTW	39.75" WTW	40.75" WTW
45.00" WTW*	46.00" WTW*	47.00" WTW*	48.00" WTW*

<sup>\* 4 3/4&</sup>quot; & 5" BC'S ONLY

WTW dimensions are unaffected by brakes

# MODULAR 4-LINK HOUSING (2 Piece Flanged Axles)

16" 4 Link Centers	17" 4 Link Centers	18" 4 Link Centers	19" 4 Link Centers
31.50" WTW	32.50" WTW	33.50" WTW	34.50" WTW
32.50" WTW	33.50" WTW	34.50" WTW	35.50" WTW

20" 4 Link Centers	21" 4 Link Centers	22" 4 Link Centers	23" 4 Link Centers
35.50" WTW	36.50" WTW	37.50" WTW	38.50" WTW
36.50" WTW	37.50" WTW	38.50" WTW	39.50" WTW

H1180	Modular 4-Link housing with floater kit and carbon brake kit\$8,250 Choice of 4 3/4", 5", or 5 1/2" bolt circle- No plates, axles, or center section
H1182	Pro Mod housing with floater kit and stainless steel brake kit
H1190	Modular 4-Link housing with two piece axles and carbon brake kit
H1192	Modular 4-Link housing with two piece axles and two piece stainless steel brake kit
H1194	Modular 4-Link housing with caliper mounts- No plates, axles, brakes, or center section\$3,535
OPRH40 OPRH44 OPRH45	Supply with Std duty chrome moly 4-link plates

#### **S60 BARE HOUSINGS**



#### **BARE CASTINGS:**

The Strange S60 casting is a vast improvement over the factory Dana 60, while still accepting the same components. The casting and oversized main caps are constructed from a proprietary nodular iron which is substantially stronger than cast iron. This has allowed the casting to be made not only thinner and lighter, but also stronger. The heavy duty main caps are fitted with adjuster nuts that eliminate the side carrier shims. Backlash and preload are adjusted by a turn of

a wrench, greatly reducing the time and effort to change a gear or differential. All castings feature a drain plug located at the bottom. Mopar applications have a machined provision to accept factory or aftermarket pinion snubbers. GM F-body applications have the torque arm mounting location cast into the unit, while A-body and G-body feature the upper control mounts.

#### **WELDED HOUSINGS:**

All below housings begin with the S60 bare casting as described above. The 3" 0.D. mild steel tubing, .250" wall thickness, is pressed deep into the casting. A welding fixture is attached and the tubes are welded 360 degrees around the outside of the casting and plug welded. The mounts are positioned by the jig and welded

to the tubes. The housing ends are installed after all other welding is complete, ensuring perfect alignment with the carrier. An optional satin black powdercoat finish is available on completely welded housings.

**HOUSING TUBED:** The S60 casting is fitted with 3"x.250" wall mild steel tubing and welded & plugged as described above. A housing like this is for a builder that will be installing their own mounts and may

also trim the tubing further. An alignment jig will be required to install the housing ends after all other welding has been completed.

#### **HOUSING WITH ENDS- NO MOUNTS:**

The S60 casting is fitted with 3".250 wall mild steel tubing and fixture welded with your choice of housing ends. Since the builder will be installing their own mounts, extreme care must be taken during the

welding process as housing end alignment can be compromised. An alignment jig should be used afterwards to ensure that warping did not occur.

#### HOUSING WITH MOUNTS- NO ENDS:

The S60 casting is fitted with 3" .250 wall mild steel tubing and fixture welded with your choice of mounts. A builder might order this if they are unsure of the final width, or already has housing ends and an alignment jig. It may also be the base for a housing that will use a

floater kit. Strange floater spindles can be fitted and welded for an additional charge. A fully welded housing with spindles can also be ordered with an optional satin black powdercoat finish.

# **HOUSING WITH ENDS AND MOUNTS:** The S60 casting is fitted with 3" .250 wall mild steel tubing and fixture welded with your choice of mounts and housing ends. This configuration is

the safest way to maintain the proper alignment since welding of the housing ends is always our last operation. An optional satin black powdercoat finish is also available.



# **S60 BARE HOUSINGS**

H1109A*	Bare Mopar casting for use with 3" O.D. tubes	\$499	
H1107A	Bare GM A-body casting for use with 3" O.D. tubes		
H1108A	Bare GM G-body casting for use with 3" O.D. tubes		
H1105A	Bare GM F-body casting for use with 3" O.D. tubes	\$550	
H60*	Mopar casting tubed- No ends or mounts	\$575	
H60E*	Mopar casting with ends- No mounts		
H60L	Mopar casting with leaf spring mounts- No ends		AND REAL PROPERTY.
H60LE	Mopar casting with leaf spring mounts, and ends	\$785	
H60GA	GM A-body casting tubed- No mounts or ends	\$625	
H60GAE	GM A-body casting with ends- No mounts		I to the finance
H60GAM	GM A-body casting with mounts- No ends		The state of the s
H60GAME	GM A-body casting with mounts and ends		
H60GG	GM G-body casting tubed- No mounts or ends	\$625	
H60GGE	GM G-body casting with ends- No mounts		
H60GGM	GM G-body casting with mounts- No ends		3
H60GGME	GM G-body casting with mounts and ends	\$839	
H60GF	GM F-body casting tubed- No mounts or ends	¢500	14
H60GFF	GM F-body casting tubed- No mounts or ends		4 1
H60GFM	GM F-body casting with ends- No mountsGM F-body casting with mounts- No ends		11/2
H60GFME	GM F-body casting with mounts and ends		
HOOGY WIL	Civi i body custing with mounts and citus	4000	
H60T67C10M	GM '67-'72 C10 housing with mounts- No ends	\$756	No.
H60T67C10ME	GM '67-'72 C10 housing with mounts and ends		200
H60T73C10M	GM '73-'87 C10 housing with mounts- No ends		
H60T73C10ME	GM '73-'87 C10 housing with mounts and ends	\$795	
H60T88C15M	GM '88-'98 C15 housing with mounts- No ends	\$706	
H60T88C15ME	GM '88-'98 C15 housing with mounts and ends	\$795	
	*Can be used for Mopar or any leaf spring application		
HEOFTEE TARRA		¢706	
H60FT65F100M	Ford '65-'72 F100 housing with mounts- No endsFord '65-'72 F100 housing with mounts and ends		
H60FT65F100ME	roru 65-72 Froo housing with mounts and ends		
Options			
H1199P-BLK	Powder coat housing satin black		
H1130DF	Install Drag Race floater spindles- Labor only		
H1130SF	Install Pro Touring floater spindles- Labor only	\$200	
H1109D	Adjuster nut wrench for S60\$37		
	466	di c	
	ALC: UNIVERSITY OF THE PROPERTY OF THE PROPERT		
		4	
	and the second s	(0)	M
		(0)	
			1
			3 1
		102	8
			9
		10	

#### **12 BOLT BARE HOUSINGS**



**BARE CASTING:** The Strange 12 bolt casting is much stronger than the 0EM 12 bolt, while still accepting the same components. The casting is poured from proprietary nodular iron which is substantially stronger than cast iron. The main caps are constructed from forged chrome moly instead of cast iron like the originals. These improvements in materials have allowed the casting to be made not only thinner and

lighter, but also stronger. The casting is machined to accept 3" O.D. tubing, has a torque arm mount cast as part of the case, and a location for a Strange 3 channel sensor. It is designed as an F-body replacement for the extremely weak 7.625", but can also be used as an upgraded 12 bolt in any leaf spring application.

WELDED HOUSINGS: All below housings begin with the Strange 12 bolt casting as described above. The 3" 0.D. mild steel tubing, 250" wall thickness, is pressed deep into the casting. A welding fixture is attached and the tubes are welded 360 degrees around the outside of the casting and plug welded. The mounts

are positioned by the jig and welded to the tubes. The housing ends are installed after all other welding is complete, ensuring perfect alignment with the carrier. An optional satin black powdercoat finish is available on completely welded housings.

**HOUSING TUBED:** The Strange 12 bolt casting is fitted with 3" x .250" wall mild steel tubing and welded & plugged as described above. A housing like this is for a builder that will be installing their own

mounts and may also trim the tubing further. An alignment jig will be required to install the housing ends after all other welding has been completed.

#### HOUSING WITH ENDS - NO MOUNTS: The

Strange 12 bolt casting is fitted with 3" .250 wall mild steel tubing and fixture welded with your choice of housing ends. Since the builder will be installing their own mounts, extreme care must be

taken during the welding process as housing end alignment can be compromised. An alignment jig should be used afterwards to ensure that warping did not occur.

# **HOUSING WITH MOUNTS - NO ENDS:** The Strange 12 holt casting is fitted with 3", 250 wall mild steel tubing and fixture


12 bolt casting is fitted with 3" .250 wall mild steel tubing and fixture welded with your choice of mounts. A builder might order this if they are unsure of the final width, or already has housing ends and an

alignment jig. It may also be the base for a housing that will use a floater kit. Strange floater spindles can be fitted and welded for an additional charge. A fully welded housing with spindles can also be ordered with an optional satin black powdercoat finish.


#### **HOUSING WITH ENDS AND MOUNTS:**

The Strange 12 bolt casting is fitted with 3".250 wall mild steel tubing and fixture welded with your choice of mounts and housing ends.

This configuration is the safest way to maintain the proper alignment since welding of the housing ends is always our last operation. An optional satin black powdercoat finish is also available.

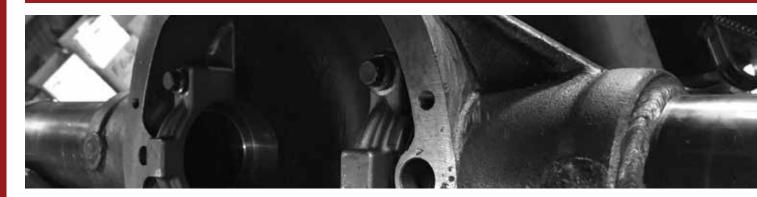

#### **12 BOLT BARE HOUSINGS**

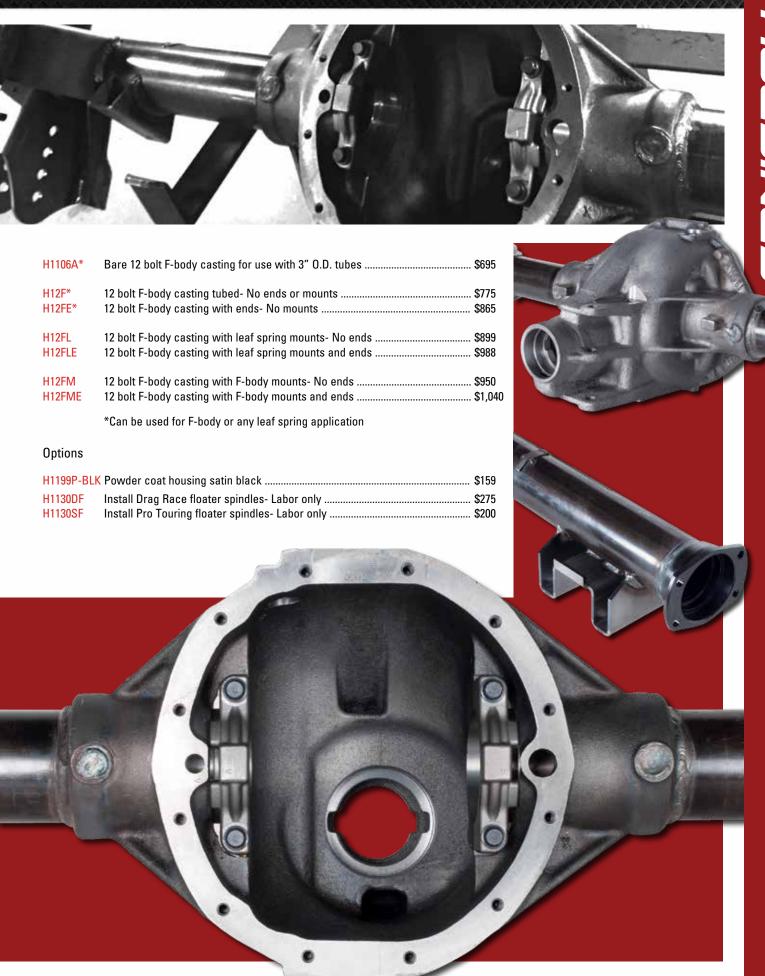


## **ENDS & COMPONENTS**



**HOUSING ENDS:** Strange housing ends are machined from MADE IN THE USA forged steel. These premium grade ends are ideal for a new or existing housing that needs to be narrowed. They provide an optimal mounting surface for the brakes to keep in proper alignment with the axle bearing. These housing ends are designed to be easily butt welded with the proper equipment. An alignment bar is

required to properly install any housing ends. Many ends are now designed to accept an inner seal. This arrangement might require a specific seal and locking collar for the axle bearing. Contact a Strange representative if you intend to use an inner seal to discuss your intentions.

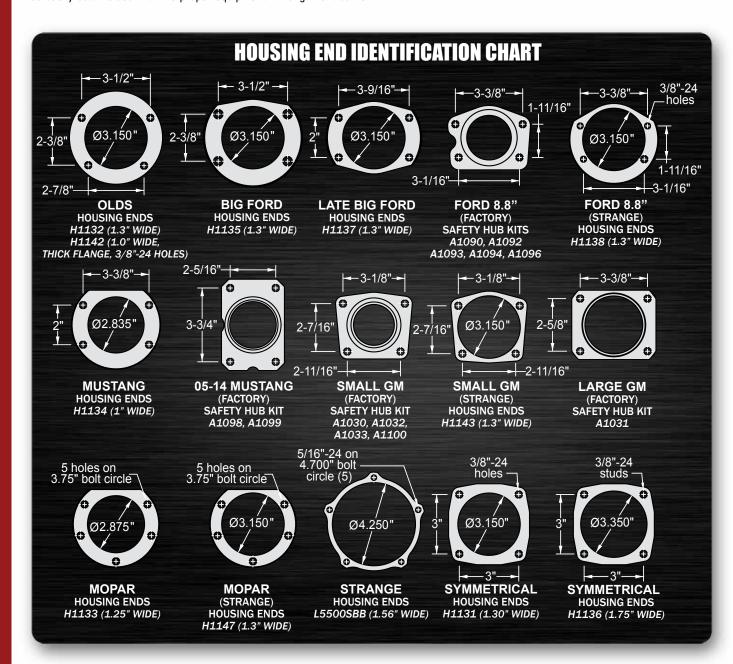

# **ENDS & COMPONENTS**

H1131	Symmetrical housing ends (tapped)	3.150 bore	3/8 x 24	1.300" wide \$110
H1132	Olds housing ends	3.150 bore	3/8 holes	1.300" wide \$100
H1142	Olds housing ends (tapped)	3.150 bore	3/8 x 24	1.300" wide \$110
H1143*	Small GM housing ends	3.150 bore	3/8 holes	1.300" wide \$100
H1144*	Small GM housing ends (ABS clearanced)	3.150 bore	3/8 holes	1.300" wide \$110
H1133	Mopar housing ends	2.875 bore	3/8 holes	1.250" wide \$100
H1147*	Mopar housing ends (special bore)	3.150 bore	3/8 holes	1.300" wide \$110
H1134*	Small Ford housing ends	2.834 bore	3/8 holes	1.000" wide \$100
H1135	Big Ford housing ends	3.150 bore	1/2 holes	1.300" wide \$100
H1136*	Symmetrical Big Bore ends (tapped)	3.350 bore	3/8 x 24	1.750" wide \$180
H1146*	Symmetrical BB ends for 3 1/2" tube	3.350 bore	3/8 x 24	1.750" wide \$230
H1137	Late Big Ford housing ends	3.150 bore	3/8 holes	1.300" wide \$100
H1138*	'87-'93 Mustang 8.8 housing ends	3.150 bore	3/8 holes	1.300" wide \$100
H1148**	'05-'14 Mustang 8.8 housing ends	3.150 bore	3/8 holes	1.300" wide \$120

<sup>\*</sup> Requires custom axles made specifically for this end \*\*Requires custom axles & B1706MC kit

B1300HSTKIT	3/8" housing end tee bolt kit- includes washers and lock nuts for 8 holes	\$31
H1133STKIT	3/8" housing end tee bolt kit- includes washers and lock nuts for 10 holes	\$38
H1135STKIT	1/2" housing end tee bolt kit- includes washers and lock nuts for 8 holes	\$46
H1112A	9" press-in center section housing stud- each	\$2
1282	3/8" x 24 reduced hex self locking flanged nut- each	\$2
H1112G	Fel Pro 9" center section gasket	\$6
<del>1</del> 1111**	Fel Pro high performance 9" Teflon Center Section gasket	\$15
H1111S**	LubeLocker Premium Gasket	\$25
3508	Fel Pro S60 / Dana 60 cover gasket	\$9
D3508F**	Fel Pro S60 / Dana 60 high performance Teflon gasket	\$18
H1106G	Fel Pro 12 bolt passenger car cover gasket	\$9





# **COMPLETE ASSEMBLY:** Our highly trained professional tradesmen construct a custom rear end that will meet or exceed your expectations. The housing is fixture welded to ensure proper alignment of all components. The appearance and quality of welds show the care that was taken by our welding department. The technician that assembles your rear end is a member of the same team that's

responsible for all our high end Pro Stock, Pro Mod, and Top Fuel rear ends. A completed rear end gives comfort in the knowledge that everything was thoroughly inspected and checked before it reached your door. The assembly arrives boxed in a custom crate to protect your investment. Optional satin black powder coating is offered on completely welded housings.

**ORDERING:** If ordering a replacement rear end, we have extensive information on stock factory units. You might consider calling us first to obtain our information so you can verify before ordering. If you are considering new tires and wheels, this is the time to make adjustments to properly place them within the wheel wells. Any decision regarding the brakes must be made now as it will affect construction of the rear end.

The best method, is to place your tires and wheels within the wheel wells and measure wheel mounting surface to wheel mounting surface. If you are purchasing a brake kit from Strange along with your housing, this is the dimension you want to specify. If not, subtract the thickness of the brake drum or rotor you are going to use to arrive at bare axle flange to axle flange. It is important to relate the dimension you are supplying is "wheel mounting surface" or "bare axle flange". The brake kit you are going to use needs to be finalized before the rear

end is ordered. Some rotors will add as little as 1/8" per side, while others can add up to 1/2". The brake kit will determine the housing end required and brake offset. Brake offset is the measurement from the outside face of the bare axle flange, to the outside face of the housing end. Brake thickness and axle offset will determine how wide the housing needs to be to achieve the desired wheel mounting location. Make sure to check the brake kit instructions for any special requirements. Some may need a specific axle flange diameter, brake register size, or access hole.

Strange Engineering sales staff is always happy to guide you through the ordering process, even if you are ordering from one of our many valued distributors. We will ensure you are not only well informed, but also confident that you will be receiving a product that will deliver many years of enjoyment and satisfaction.

# **PINION OFFSET:** Pinion location can be confusing to measure. If this is a replacement rear, and the motor and transmission are in the factory location, it can be ordered with the stock factory pinion offset. If unsure, measurements can be taken from the axle flanges or housing ends. Since we are determining differences, either is fine as long as we are comparing axle flange or housing end measurements. Measure from driver side to the center of the pinion nut, and passenger

side to center of the pinion nut. Subtract and divide by two. This is your pinion offset and it is offset to the side that had the smallest number. If both are equal, then it is a centered pinion. Most factory rear ends will be offset to the passenger side since the motor and transmission are also. The design is to keep the driveshaft aligned with the motor and transmission to avoid vibration and poor service life of the u-joints and gear set.

**PINION ANGLE:** If this is a replacement rear end, factory pinionangle is assumed unless specified otherwise. A custom pinion angle is ordered only in some leaf spring applications. Extreme care must be taken as pinion angle is commonly misunderstood. Pinion angle is determined by a calculation that compares the angle of the motor and transmission to the angle of the pinion shaft. It is measured once the motor, transmission, driveshaft, rear end, and tires and


wheels are installed. The vehicle must be on level ground, at ride height, with the full weight of the car resting on all four tires. Where the leaf spring mounts are welded in relationship to pinion centerline is only one of the many factors that will result in a specific pinion angle. Any custom pinion angle should be discussed with a Strange Engineering associate before ordering.

#### **BOLT-IN APPLICATIONS**

Make	Model	Years	Ava	liadie i	Rear Ends	Make	Model	Years	Avail	able I	Rear End
GM	Blazer (Full Size)	73-91	9″	S60			Nova	68-79	9"	S60	12 blt
		92-94	9"	S60			Regal	73-77	9"		
	Blazer (S10-2WD)	82-94	9"	S60	12 blt		J	78-87	9"	S60	
	C10 Truck	67-72	9"	S60			S10-2WD	82-04	9"	S60	12 blt
	C10 / K10 Truck	73-87	9"	S60			Skylark	64-72	9"	S60	
	C15 Truck	88-98	9"	S60			Suburban	73-91	9"	S60	
	K15 Truck	88-98		S60			Tempest	64-67	9"	S60	
	2WD Tahoe/Suburb	an95-99	9"	S60							
	4WD Tahoe/Suburb			S60		Ford	Capri	79-86	9"		
	Camaro	67-81	9"	S60	12 blt		Cobra Jet	08,10,12,16	9"		
		82-02		S60	12 blt		Comet	66-69	9"		
		10-15		S60			Cougar	67-70	9"		
	Caprice	65-90	9"				F100 Pick-up	65-72	9"	S60	
	Chevelle	64-72	9"	S60			Fairlane	66-70	9"		
		73-77	9"				Mustang	64-73	9"		
	Chevrolet	55-57	9"	S60	12 blt		Fox body	79-93	9"		
	Chevy II	62-67	9"		12 blt		SN-95	94-04	9"		
	Cutlass	64-72	9"	S60			S-197	05-14	9"		
		73-77	9"				Ranchero	71-73	9"		
		78-88	9"	S60			Shelby GT500	07-14	9"		
	El Camino	64-72	9"	S60			Torino	68-73	9"		
	<u> </u>	73-77	9"					30.10			
		78-87	9"	S60		Mopar	Barracuda	64-74	9"	S60	
	Firebird	67-81	9"	S60	12 blt		Belvedere	68-75	9"	S60	
		82-02	Ĭ	S60	12 blt		Challenger	70-74	9"	S60	
	Gran Prix	69-72	9"	S60			Charger	66-78	9"	S60	
	STAILT TIX	73-77	9"	000			Coronet	65-79	9"	S60	
		78-86	9"	S60			Dart	64-76	9"	S60	
	GTO	68-72	9"	S60			Duster	70-76	9"	S60	
	Impala	59-85	9"				Fury	65-79	9"	S60	
	Lemans	64-72	9"	S60			GTX	67-71	9"	S60	
		73-77	9"				R/T	65-79	9"	S60	
		78-81	9"	S60			Road Runner	68-79	9"	S60	
	Malibu	64-72	9"	S60			Satellite	65-72	9"	S60	
		73-77	9"				Scamp	71-76	9"	S60	
		78-87	9"	S60			Super Bee	68-79	9"	S60	
	Monte Carlo	70-72	9"	S60			Swinger	69-76	9"	S60	
		73-77	9"				Valiant	70-76	9"	S60	
		78-88	9"	S60							



## 9" STREET / TRACK HOUSINGS

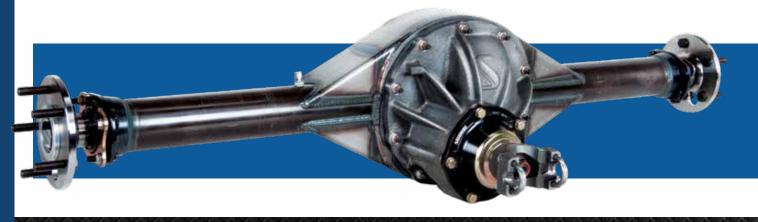

## FORD / GM / MOPAR BOLT-IN REAR ENDS

Complete Ford 9" rear ends are a combination of a housing, center section, axle package, and brake kit. Since the possibilities are endless, it is necessary to choose all of the components and total them to arrive at your desired assembly. Whenever a housing, center section, and

axle package are ordered together, they are assembled as one unit and crated. Purchased brake kits can be installed for an additional \$25. In these examples, the brake kit prices include the \$25 charge.

Listed are samples of possible combinations. Options for housing, center section, axle package, and brake kit, are listed within their respective sections.

Custom widths are available at no additional charge

## STREET

Ford / GM / Mopar leaf spring hsg- HF9LE / S-Series iron center with clutch posi unit- PRF130 / 31 spline alloy axle pkg- P3102 \$2,409
Mustang 1979-2004 hsg- HF9M86ME / S-Series iron center with clutch posi unit- PRF130 / 31 spline alloy axle pkg- P3102
Ford '67-'72 F100 hsg- HF9FT65F100ME / S-Series iron center with clutch posi unit- PRF130 / 31 spline alloy axle pkg- P3102\$2,419
GM A-body hsg- HF9GAME / S-Series iron center with clutch posi unit- PRF130 / 31 spline alloy axle pkg- P3102
GM '67-'72 C10 hsg- HF9LEG67C10ME / S-Series iron center with clutch posi unit- PRF130 / 31 spline alloy axle pkg- P3102


Housing	Upgrade to Ultra Fab housing*	. \$500
	Powder coat satin black- H1199P-BLK	\$159
Differential	Eaton 31 spline helical gear Truetrack- OPRF09	.\$200
Center Section	HD Pro Aluminum - Replace PRF130 with PRF180	\$354
Brakes	Wilwood 11" Pro street disc brake kit installed	\$624
	Wilwood 12" Pro Street disc brake kit installed	. \$775
	Late Big Ford 11" drum brake kit installed	.\$520

<sup>\*</sup> Not all housings are available in Ultra Fab - Check listings Brake kit prices include \$25 installation charge See Brake Section for More Brake Options

#### STREET/TRACK

Ford / GM / Mopar leaf spring hsg- HF9LE / Pro Iron center with upgrades / 35 spline alloy axle pkg- P3502	\$2,951*	\$3,061**	
Mustang 1979-2004 hsg- HF9M86ME / Pro Iron center with upgrades / 35 spline alloy axle pkg- P3502			
Ford '67-'72 F100 hsg- HF9FT65F100ME / Pro Iron center with upgrades / 35 spline alloy axle pkg- P3502	\$2,961*	\$3,071**	
GM A-body hsg- HF9GAME / Pro Iron center with upgrades / 35 spline alloy axle pkg- P3502\$  GM G-body hsg- HF9GGME / Pro Iron center with upgrades / 35 spline alloy axle pkg- P3502\$			
GM '67-'72 C10 hsg- HF9LEG67C10ME / Pro Iron center with upgrades / 35 spline alloy axle pkg- P3502	2,961*		X : X

<sup>\*</sup> Pro Iron center- PRF120 with Eaton 35 spline cast iron Truetrack- OPRF11 and Strange black support- OPRF16

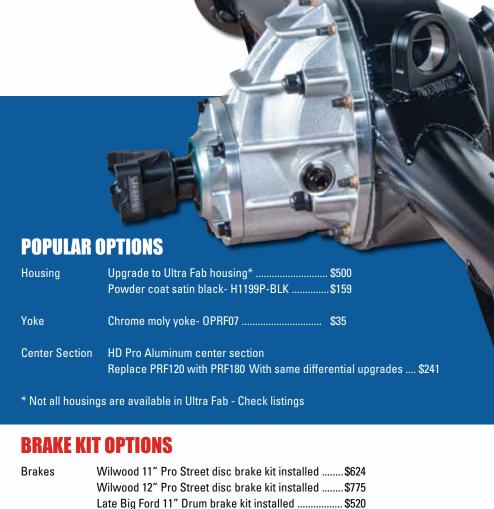

<sup>\*\*</sup> Pro Iron center- PRF120 with Strange 35 spline forged steel helical gear S-Trac- OPRF10 and Strange black support- OPRF16

## 9" DRAG RACE WITH PRO IRON CENTER SECTION



Complete Ford 9" rear ends are a combination of a housing, center section, axle package, and brake kit. Since the possibilities are endless, it is necessary to choose all of the components and total them to arrive at your desired assembly. Whenever a housing, center section, and

axle package are ordered together, they are assembled as one unit and crated. Purchased brake kits can be installed for an additional \$25. In these examples, the brake kit prices include the \$25 charge.

Listed are samples of possible combinations. Options for housing, center section, axle package, and brake kit, are listed within their respective sections.

Custom widths are available at no additional charge

## DRAG RACE - 35 SPLINE AXLES

Bare 9" hsg without mounts- HF9E / Pro Iron center with standard gear- PRF105 / 35 spline Pro Race axle pkg- P1007	\$2,359
Ford / GM / Mopar leaf spring hsg- HF9LE / Pro Iron center with standard gear- PRF105 / 35 spline Pro axle pkg- P1007	\$2,459
Mustang 1979-2004 hsg- HF9M86ME / Pro Iron center with standard gear- PRF105 / 35 spline Pro Race axle pkg- P1007	
Ford '67-'72 F100 hsg- HF9FT65F100ME / Pro Iron center with standard gear- PRF105 / 35 spline Pro Race axle pkg- P1007	\$2,469
GM A-body hsg- HF9GAME / Pro Iron center with standard gear- PRF105 / 35 spline Pro axle pkg- P1007	\$2,629 \$2,629 \$2,789
GM '67-'72 C10 hsg- HF9LEG67C10ME / Pro Iron center with standard gear- PRF105 / 35 spline Pro axle pkg- P1007\$ GM '73-'87 C10 hsg- HF9LEG73C10ME / Pro Iron center with standard gear- PRF105 / 35 spline Pro axle pkg- P1007\$ GM '88-'98 C15 hsg- HF9LEG88C15ME / Pro Iron center with standard gear- PRF105 / 35 spline Pro axle pkg- P1007\$	52,469

Housing	Upgrade to Ultra Fab housing*
Center Section	n Option for Small stem Pro gear- Replace PRF105 with PRF115\$136 Option for Large stem Pro gear- Replace PRF105 with PRF115 + OPRF05\$186
Axles	Option for 5/8" stud kit- Replace P1007 with P100758 \$54
Brakes	Pro Race disc brake kit installed

<sup>\*</sup> Not all housings are available in Ultra Fab - Check listings

Brake kit prices include \$25 installation charge - See Brake Section for More Brake Options

# **DRAG RACE - 40 SPLINE AXLES**

Bare 9" hsg without mounts- HF9E / Pro Iron center with upgrade * / 40 spline solid Pro Race axle pkg- P1016 Ford / GM / Mopar leaf spring hsg- HF9LE / Pro Iron center with upgrade * / 40 spline solid Pro Race axle pkg- P1016	
Mustang 1979-2004 hsg- HF9M86ME / Pro Iron center with upgrade * / 40 spline solid Pro Race axle pkg- P1016	\$2,804 \$2,804
Ford '67-'72 F100 hsg- HF9FT65F100ME / Pro Iron center with upgrade * / 40 spline solid Pro Race axle pkg- P1016	\$2,654
GM A-body hsg- HF9GAME / Pro Iron center with upgrade * / 40 spline solid Pro Race axle pkg- P1016	
GM '67-'72 C10 hsg- HF9LEG67C10ME / Pro Iron center with upgrade * / 40 spline solid Pro Race axle pkg- P1016	\$2,654

<sup>\*</sup> Pro Iron center with standard gear- PRF105 + 40 spline spool upgrade- OPRF01

Housing	Upgrade to Ultra Fab housing*	\$500
-	Install back brace- OPRH20	\$230
	Powder coat satin black- H1199P-BLK	\$159
Center Section	Option for Small stem Pro gear- Replace PRF105 + 0	PRF01 with PRF115 + OPRF01\$136
	Option for Large stem Pro gear- Replace PRF105 +	OPRF01 with PRF115 + OPRF01 + OPRF05\$186
Axles	Option for Gun-drilled axles - Replace P1016 with P	1014 \$81
Brakes	Pro Race disc brake kit installed	\$620
	Dual Pro Race disc kit installed	\$1,045
	Pro Carbon disc brake installed	\$2,975
* N - 4 - 11   !	and the contribute to tilling Falls (Charle Berling)	

<sup>\*</sup> Not all housings are available in Ultra Fab - Check listings

Brake kit prices include \$25 installation charge - See Brake Section for More Options



# 9" DRAG RACE WITH LW ALUMINUM CENTER SECTION



Listed are samples of possible combinations. Options for housing, center section, axle package, and brake kit, are listed within their respective sections.

Custom widths are available at no additional charge

#### DRAG RACE - 35 SPLINE AXLES

DIIAG IIAGL - GO OF LINL ANLLO	
Bare 9" hsg without mounts- HF9E / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro Race axle pkg- P1007	\$2,430
Ford / GM / Mopar leaf spring hsg- HF9LE / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	\$2,530
Mustang 1979-2004 hsg- HF9M86ME / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	
Mustang 2005-2014 hsg- HF9M05ME / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	\$2,690
Ford '67-'72 F100 hsg- HF9FT65F100ME / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	\$2,540
GM A-body hsg- HF9GAME / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	\$2,700
GM G-body hsg- HF9GGME / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	\$2,700
GM B-body hsg- HF9GBME / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	\$2,860
GM '67-'72 C10 hsg- HF9LEG67C10ME / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	\$2,590
GM '73-'87 C10 hsg- HF9LEG73C10ME / L/W Aluminum center with standard gear- PRF155 / 35 spline Pro axle pkg- P1007	\$2,540
GM '88-'98 C15 hsg- HE9I FG88C15MF / L/W Aluminum center with standard gear- PBF155 / 35 spline Pro axle pkg- P1007	\$2.540

Housing	Upgrade to Ultra Fab housing* \$50 Install back brace- OPRH20 \$23 Powder coat satin black- H1199P-BLK \$15	0
Center Section	Option for Small stem Pro gear- Replace PRF155 with PRF165\$12 Option for Large stem Pro gear- Replace PRF155 with PRF165 + OPRF05\$17	
Axles	Option for 5/8" stud kit- Replace P1007 with P100758\$54	•
Brakes	Pro Race disc brake kit installed	

<sup>\*</sup> Not all housings are available in Ultra Fab - Check listings Brake kit prices include \$25 installation charge See Brake Section for More Brake Options

# DRAG RACE - 40 SPLINE AXLES Bare 9" hsg without mounts- HF9E / L/W Aluminum center with upgrade \* / 40 spline solid Pro Race axle pkg- P1016 .......\$2,615

Ford / GM / Mopar leaf spring hsg- HF9LE / L/W Aluminum center with upgrade \* / 40 spline solid Pro axle pkg- P1016 ......\$2,715

Ford '67-'72 F100 hsg- HF9FT65F100ME / L/W Aluminum center with upgrade \* / 40 spline solid Pro axle pkg- P1016 ......\$2,725

LOMPLETE

#### **POPULAR OPTIONS**

Center Section Option for Small stem Pro gear- Replace PRF155 + OPRF01 with PRF165 + OPRF01 .....\$129

Option for Large stem Pro gear- Replace PRF155 + OPRF01 with PRF165 + OPRF01 + OPRF05 .....\$179

Axles Option for Gun-drilled axles- Replace P1016 with P1014 ......\$81

Brakes Pro Race disc brake kit installed .......\$620

Dual Pro Race disc kit installed .....\$1,045 Pro Carbon disc brake installed .....\$2,975

Brake kit prices include \$25 installation charge - See Brake Section for More Brake Options



<sup>\*</sup> Lightweight Aluminum center section with standard gear- PRF155 with 40 spline spool upgrade- OPRF01

<sup>\*</sup> Not all housings are available in Ultra Fab - Check listings

#### 9" DRAG RACE WITH HD ALUMINUM CENTER SECTION



#### FORD / GM / MOPAR BOLT-IN REAR ENDS

Complete Ford 9" rear ends are a combination of a housing, center section, axle package, and brake kit. Since the possibilities are endless, it is necessary to choose all of the components and total them to arrive at your desired assembly. Whenever a housing, center section, and

axle package are ordered together, they are assembled as one unit and crated. Purchased brake kits can be installed for an additional \$25. In these examples, the brake kit prices include the \$25 charge.

Listed are samples of possible combinations. Options for housing, center section, axle package, and brake kit, are listed within their respective sections.

Custom widths are available at no additional charge

#### **DRAG RACE - 35 SPLINE AXLES**

Bare 9" hsg without mounts- HF9E / HD Pro Alum center with standard gear- PRF184 / 35 spline Pro axle pkg- P1007 ......\$2,599

Ford / GM / Mopar leaf spring hsg- HF9LE / HD Pro Alum center with standard gear- PRF184 / 35 spline Pro axle pkg- P1007.... \$2,699

Mustang 1979-2004 hsg- HF9M86ME / HD Pro Alum center with standard gear- PRF184 / 35 spline Pro axle pkg- P1007 ............\$2,859 Mustang 2005-2014 hsg- HF9M05ME / HD Pro Alum center with standard gear- PRF184 / 35 spline Pro axle pkg- P1007 .........\$2,859

Ford '67-'72 F100 hsg- HF9FT65F100ME / HD Pro Alum center with standard gear- PRF184 / 35 spline Pro axle pkg- P1007 ......\$2,709

GM '67-'72 C10 hsg- HF9LEG67C10ME / HD Pro Alum center with standard gear- PRF184 / 35 spline Pro axle pkg- P1007 ....... \$2,759 GM '73-'87 C10 hsg- HF9LEG73C10ME / HD Pro Alum center with standard gear- PRF184 / 35 spline Pro axle pkg- P1007 ....... \$2,709 GM '88-'98 C15 hsg- HF9LEG88C15ME / HD Pro Alum center with standard gear- PRF184 / 35 spline Pro axle pkg- P1007 ....... \$2,709

Housing	Upgrade to Ultra Fab housing*Install back brace- OPRH20	
	Powder coat satin black- H1199P-BLK	\$159
Center Section	n Small stem pro gear- Replace PRF184 with PRF188	
	Large stem pro gear- Replace PRF184 with PRF188 + OPRF05	\$201
	9 1/2" large stem pro- Replace PRF184 with PRF188 + OPRF52	\$321
Axles:	5/8" stud kit- Replace P1007 with P100758\$54	
Brakes	Pro Race disc brake kit installed\$620	
	Dual Pro Race disc kit installed\$1,045	
	Pro Carbon disc brake installed\$2,975	

# 9" DRAG RACE WITH HD ALUMINUM CENTER SECTION

# **DRAG RACE - 40 SPLINE AXLES**

Bare 9" hsg without mounts- HF9E / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$2,784
Ford / GM / Mopar leaf spring hsg- HF9LE / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$2,884
Mustang 1979-2004 hsg- HF9M86ME / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,044 \$3,044
Ford '67-'72 F100 hsg- HF9FT65F100ME / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016	. \$2,894
GM A-body hsg- HF9GAME / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016GM G-body hsg- HF9GGME / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,054 \$3,054
GM '67-'72 C10 hsg- HF9LEG67C10ME / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016 \$2,6 GM '73-'87 C10 hsg- HF9LEG73C10ME / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016 \$2,6 GM '88-'98 C15 hsg- HF9LEG88C15ME / HD Pro Alum center with upgrade * / 40 spline solid Pro axle pkg- P1016 \$2,6	394

<sup>\*</sup> HD Pro Aluminum center with standard gear- PRF184 with 40 spline spool option- OPRF01

Housing	Upgrade to Ultra Fab housing*Install back brace- OPRH20	
	Powder coat satin black- H1199P-BLK	. \$159
Center Section Small stem pro gear- Replace PRF184 + OPRF01 with PRF188 + OPRF01		
	Large stem pro gear- Replace PRF184 + OPRF01 with PRF188 + OPRF01 + 0 9 1/2" large stem pro- Replace PRF184 + OPRF01 with PRF188 + OPRF01 + 0	
Axles:	Gun-drilled axles- Replace P1016 with P1014	. \$81
Brakes	Pro Race disc brake kit installed\$620	
	Dual Pro Race disc kit installed\$1,045	
	Pro Carbon disc brake installed\$2,975	

<sup>\*</sup> Not all housings are available in Ultra Fab - Check listings Brake kit prices include \$25 installation charge See Brake Section for More Brake Options



#### 9" DRAG RACE WITH ULTRA CASE CENTER SECTION



#### FORD / GM / MOPAR BOLT-IN REAR ENDS

Complete Ford 9" rear ends are a combination of a housing, center section, axle package, and brake kit. Since the possibilities are endless, it is necessary to choose all of the components and total them to arrive at your desired assembly. Whenever a housing, center section, and

axle package are ordered together, they are assembled as one unit and crated. Purchased brake kits can be installed for an additional \$25. In these examples, the brake kit prices include the \$25 charge.

Listed are samples of possible combinations. Options for housing, center section, axle package, and brake kit, are listed within their respective sections.

Custom widths are available at no additional charge

#### DRAG RACE - 35 SPLINE AXLES

Bare 9" hsg without mounts- HF9E / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007\$2,854
Ford / GM / Mopar leaf spring hsg- HF9LE / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007

Mustang 1979-2004 hsg- HF9M86ME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 ...... \$3,114 Mustang 2005-2014 hsg- HF9M05ME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 ...... \$3,114

Ford '67-'72 F100 hsg- HF9FT65F100ME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 .............\$2,964

GM A-body hsg- HF9GAME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 ......\$3,124 GM G-body hsg- HF9GGME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 .....\$3,124 GM B-body hsg- HF9GBME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 .....\$3,284

GM '67-'72 C10 hsg- HF9LEG67C10ME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 ........ \$3,014 GM '73-'87 C10 hsg- HF9LEG73C10ME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 ....... \$2,964 GM '88-'98 C15 hsg- HF9LEG88C15ME / Ultra Case center with small stem pro gear- PRF205 / 35 spline Pro axle pkg- P1007 ....... \$2,964

Housing:	Upgrade to Ultra Fab housing*Install back brace- OPRH20Powder coat satin black- H1199P-BLK	
Center Section	n: Large stem pro gear- Add option OPRF05 9 1/2" large stem pro- Add option OPRF52 1480 chrome moly yoke- Add option OPRF20	\$170
Axles:	5/8" stud kit- Replace P1007 with P100758	. \$54
Brakes	Pro Race disc brake kit installed  Dual Pro Race disc brake kit installed  Pro Carbon disc brake kit installed	\$1,045





# 9" DRAG RACE WITH ULTRA CASE CENTER SECTION

۶	DRAG RACE - 40 SPLINE AXLES	
8	Bare 9" hsg without mounts- HF9E / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,039
>	Ford / GM / Mopar leaf spring hsg- HF9LE / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,139
5	Mustang 1979-2004 hsg- HF9M86ME / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,299
5	Mustang 2005-2014 hsg- HF9M05ME / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,299
>	Ford '67-'72 F100 hsg- HF9FT65F100ME / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,149
>		\$3,309
۶	GM G-body hsg- HF9GGME / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,309
þ	GM B-body hsg- HF9GBME / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,469
Ş	GM '67-'72 C10 hsg- HF9LEG67C10ME / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	
S	GM '73-'87 C10 hsg- HF9LEG73C10ME / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	
>	GM '88-'98 C15 hsg- HF9LEG88C15ME / Ultra Case center with upgrade * / 40 spline solid Pro axle pkg- P1016	\$3,149
	* 3 250" hore Ultra Case center with small stem pro gear- PRE205 with 40 spline spool option- OPRE01	

Housing	Upgrade to Ultra Fab housing*\$500 Install back brace- OPRH20\$230	
	Powder coat satin black- H1199P-BLK\$159	
Center Section	n Large stem pro gear- Add option OPRF05	\$50
	Large stem pro gear and 3.812" case- Replace PRF205 + OPRF01 with PRF225	\$53
	9 1/2" large stem pro- Replace PRF205 + OPRF01 with PRF225 + OPRF52	\$223
	1480 chrome moly yoke- Add option OPRF20	
Axles	Gun-drilled axles- Replace P1016 with P1014\$81	
Brakes	Pro Race disc brake kit installed\$620	
	Dual Pro Race disc brake kit installed\$1,045	
	Pro Carbon disc brake kit installed\$2,975	

<sup>\*</sup> Not all housings are available in Ultra Fab - Check listings Brake kit prices include \$25 installation charge See Brake Section for More Brake Options



Strange Engineering has developed and stringently tested its new ALL aluminum independent rear end. As opposed to 9" steel fabricated units, the Strange "one piece" aluminum unit provides a seamless installation, comparable strength, and quieter operation compared to 9" aftermarket gear sets at a weight that is only 20 lbs. greater than the OEM 218mm unit.

The Strange 9.75" utilizes proven components- including the Strange 35-spline S-Trac (helical design) and Hy-Tuf axle shafts. Manufactured from lightweight 206-T4 aluminum, which provides exceptional strength and toughness at a reduced weight. Strange designed the 9.75" unit with a radial design- for both the main unit and the support cover, which provides outstanding strength and increased rigidity. Aircraft grade 2024-T351 billet aluminum main caps and steel adjuster nuts for easy and precise gear set-up. The main caps are further supported by the cover, increasing strength and decreasing deflection. The 9.75" is coated with black Enduraguard™ to maintain a clean finish.





Strange offers 35-spline Hy-Tuf stub shafts to adapt it's 9.75" to popular existing aftermarket axle shaft assemblies. Including shafts for 14.313" axle flange to axle flange dimension, which will fit The Driveshaft Shop axle assemblies for OEM rear end/center configurations. Stub axles are also available for 17.30", which will fit The Driveshaft Shop and \*G-Force 9" shaft assembly configurations. Custom Strange axle shafts are also available- call to discuss your application.

\* G-force stamped steel CV joint dust caps are not compatible with Strange stub axles-Must be sealed with RTV



- Seamless "Bolt-In" Installation
- Exceptional Strength, High Toughness, Lightweight Premium 206-T4 Aluminum
- Finned Housing and Radial Ribbed Cover Design Provides Substantial Strength and Rigidity
- Support Style Rear Cover Reinforces Main Caps to Increase Overall Strength and Minimizes Deflection
   (pictured above right)
- Aircraft Grade 2024-T351 Billet Aluminum Main Caps and Steel Adjuster Nuts for Easy and Precise Gear Set-Up
- 35-SplineHyTuf Axle Shafts & Helical Differential
- Ratios Available from 3.54-6.50
- Robust Enduraguard™ Black Coating for Extensive Surface Protection and Provides a clean and easily maintained surface finish

<sup>\*</sup> H-1400 9.75" Independent rear end, choice of gear ratio from 3.54-6.50, 1350 series standard pinion yoke (optional chrome-moly pinion yoke available at additional cost). U-bolts, polyurethane bushings included (will fit OEM bushings that Strange does not offer), 35-spline S-Trac-fully assembled with choice of 35-spline Hy-Tuf stub shafts ... \$3,910 \* H-1400 requires aftermarket driveshaft and axles shafts-call

## **S60 BOLT-IN REAR ENDS**



**OVERVIEW:** The Strange S60 is a vast improvement over a factory Dana 60, while still accepting the same components. The casting and oversized main caps are constructed from a proprietary nodular iron which is substantially stronger than cast iron. This has allowed the casting to be made not only thinner and lighter, but also stronger. The heavy duty main caps are fitted with adjuster nuts that eliminate the side carrier shims. Backlash and preload are adjusted by a turn of a wrench, greatly reducing the time and effort to change a gear or differential. The 9.750" ring gear can endure a tremendous amount of abuse- equal to a 9" Ford at a fraction of the price. It is also more efficient, taking


less horsepower to drive the ring and pinion. The S60 weighs 15 lbs. more than a comparable 9" rear end, and only 20-25 lbs. more than an aftermarket 12-bolt. The S60 rear end is equipped with 35-spline axle shafts without costly upgrades. All castings feature a drain plug located at the bottom. Mopar applications have a machined provision to accept factory or aftermarket pinion snubbers. GM F-body applications have the torque arm mounting location cast into the unit, while A-body and G-body feature integrated upper control mounts. The HD 1350 series pinion yoke is larger than any factory yoke and needs to be accounted for when ordering the driveshaft.

STREET/TRACK: The S60 is equipped with a Spicer Traclock (clutch style) posi unit, Standard gear set, 35 spline Alloy axles, 7/16" or 1/2" wheel studs, HD 1350 series yoke, u-bolt kit, and steel rear cover. The Trac-lock is designed for street use in vehicles that will not be raced. The optional Truetrack (helical gear) differential is a great choice for a Street / Track applications. Gear ratio choices are 3.54, 3.73, 4.10, 4.30, 4.56, 4.88, 5.13, & 5.38. Upgrades are available to the differential and wheel studs. Options include a chrome moly 1350 series yoke, Strange aluminum black powder coated cover, LPW HD aluminum cover, and satin black powder coated housing. The steel cover would also be powder coated when this option is ordered.

**F-BODY:** This assembly comes standard with the upgrade to the Truetrack (helical gear) differential, Standard gear set, 35 spline Alloy axles, 12 mm or 1/2" wheel studs, HD 1350 series yoke, u-bolt kit, and steel rear cover. Gear ratio choices are the same as above. The rear can be configured for 82-92, 1993-1997 or 1998-2002 factory disc brakes and 3 or 4 channel ABS. Aluminum covers can not be used due to the close proximity of the rear end to the gas tank. Upgrades include provisions for ABS. Options are a chrome moly 1350 series yoke and satin black powder coated housing. The steel cover would also be powder coated when this option is ordered.

**DRAG RACING:** The S60 35 spline packages are equipped with a Pro Series lightweight steel spool, Standard gear set, 35 spline Pro Race axles, 1/2" wheel studs, HD 1350 series yoke, u-bolt kit, and steel rear cover. The 40 spline packages are supplied with a Pro Series lightweight steel spool, Standard gear set, 40 spline solid Pro Race axles, 5/8" stud kit, and steel rear cover. Standard gear ratio choices

are 3.54, 3.73, 4.10, 4.30, 4.56, 4.88, 5.13, & 5.38. Pro gear are 4.10, 4.30, 4.56, 4.88, 5.38, & 6.17. Options include gun drilled 40-spline axles, pro gear set, chrome moly yoke, Strange aluminum black powder coated cover, LPW HD aluminum cover, and satin black powder coated housing. The steel cover would also be powder coated when this option is ordered.

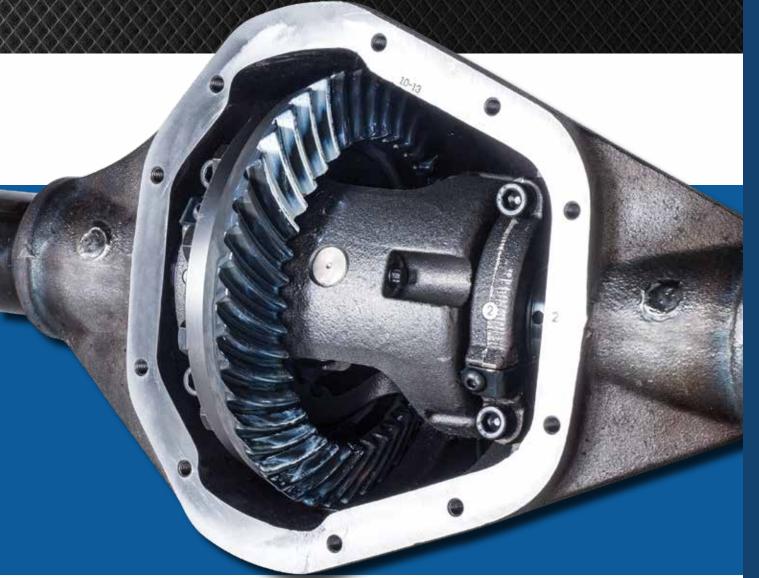

## **S60 GM STREET / TRACK & DRAG RACE**



# A-BODY / G-BODY / F-BODY / LEAF SPRING / TRUCK BOLT-IN REAR ENDS (Custom widths are available at no additional charge)

PRSB05	PRSB05 Bare housing - no mounts / Spicer Trac-lock posi / 35 spline Alloy axles					
PRSL05		spring housing / Spicer Trac-lock posi / 35 spline Alloy axles				
PRSA05			ac-lock posi / 35 spline Alloy axles			
PRSG05	GM G-body housing / Spicer Trac-lock posi / 35 spline Alloy axles					
PRSF05			etrack / 35 spline Alloy axles			
PRST670	C1005 '67-'72 C10	housing / Spicer	Trac-lock posi / 35 spline Alloy axles	\$2,346		
PRST730			Trac-lock posi / 35 spline Alloy axles			
PRST880			Trac-lock posi / 35 spline Alloy axles			
	Upgrades	OPRS01	From Trac-lock to Detroit locker	\$320		
	136866	OPRS02	From Trac-lock to Truetrack helical gear differential	\$320		
XXX		OPRS12	To 5/8" stud kit			
		OPRG13	F-Body upgrade- Strange supplies 4 channel ABS reluctor rings			
		OPRS30	F-body upgrade- Install 3 channel ABS reluctor ring on differential	\$200		
$\times\!\times\!\times$	Options	OPRS06	LPW HD aluminum cover	\$125		
$\times$		OPRS08	Strange black powder coat aluminum cover	\$50		
$\propto \propto$		OPRS18	Chrome moly pinion yoke			
		H1199P-BLK	Powder coat housing- satin black			
	Brakes	Wilwood 11" F	Pro street disc brake kit installed	\$624		
		Wilwood 12" F	Pro street disc brake kit installed	\$775		
		Late Big Ford	11" drum brake kit installed	\$520		


<sup>-</sup> See Brake Kit Section For More Brake Options

## **S60 GM STREET / TRACK & DRAG RACE**


## A-BODY / G-BODY / F-BODY / LEAF SPRING / TRUCK BOLT-IN REAR ENDS

(Custom widths are available at no additional charge)

PRSB10 Bare housing - no mounts / L/W spool / standard gear / 35 spline Pro axles							
PRSL10		eaf spring housing / L/W spool / standard gear / 35 spline Pro axles \$2,230 kM A-body housing / L/W spool / standard gear / 35 spline Pro axles \$2,230 kM G-body housing / L/W spool / standard gear / 35 spline Pro axles \$2,230 kM F-body housing / L/W spool / standard gear / 35 spline Pro axles \$2,230 kM F-body housing / L/W spool / standard gear / 35 spline Pro axles \$2,361 kG-772 C10 housing / L/W spool / standard gear / 35 spline Pro axles \$2,361 kG-73-72 C10 housing / L/W spool / standard gear / 35 spline Pro axles \$2,096 kg-98 C15 housing / L/W spool / standard gear / 35 spline Pro axles \$2,096 kg-98 C15 housing / L/W spool / standard gear / 35 spline Pro axles \$2,096 kg-98 C15 housing / L/W spool / standard gear / 40 spline solid Pro axles \$2,350 kg-98 k					
PRSA10	-	-					
PRSG10	•		· ·				
PRSF10 GM F-body housing / L/W spool / standard gear / 35 spline Pro axles							
PRST67C10		-					
PRST73C10	PRST73C1010 '73-'87 C10 housing / L/W spool / standard gear / 35 spline Pro axles\$2,						
PRST88C15	10 '88-'98 C15	housing / L/W spo	ool / standard gear / 35 spline Pro axles	\$2,096			
	Upgrades	OPRS14	To 5/8" stud kit	\$54			
PRSB15	Bare housing -	- no mounts / L/W	spool / standard gear / 40 spline solid Pro axles	. \$2,350			
PRSL15 Leaf spring housing / L/W spool / standard gear / 40 spline solid Pro axles							
PRSA15	· · · · · · · · · · · · · · · · · · ·						
PRSG15	GM G-body ho	using / L/W spool	/ standard gear / 40 spline solid Pro axles	. \$2,524			
PRSF15	GM F-body ho	using / L/W spool	/ standard gear / 40 spline solid Pro axles	. \$2,635			
PRST67C10	15 '67-'72 C10	housing / L/W spo	ool / standard gear / 40 spline solid Pro axles	. \$2,440			
PRST73C10	15 '73-'87 C10	housing / L/W spo	ool / standard gear / 40 spline solid Pro axles	. \$2,390			
PRST88C15	15 '88-'98 C15	housing / L/W spo	ool / standard gear / 40 spline solid Pro axles	. \$2,390			
	Upgrades	OPRS16	To gun drilled 40 spline axles	. \$82			
	Options	OPRS22	Pro gear set	\$100			
		OPRS06	LPW HD aluminum cover	\$125			
		OPRS08	Strange black powder coat aluminum cover	. \$50			
		OPRS18	Chrome moly pinion yoke	\$51			
		H1199P-BLK	Powder coat housing- satin black	\$159			
	Brakes	Pro Race disc	brake kit installed	\$624			
		Dual Pro Race	disc kit installed	\$1,045			
		Pro Carbon dis	c brake installed	\$2,975			





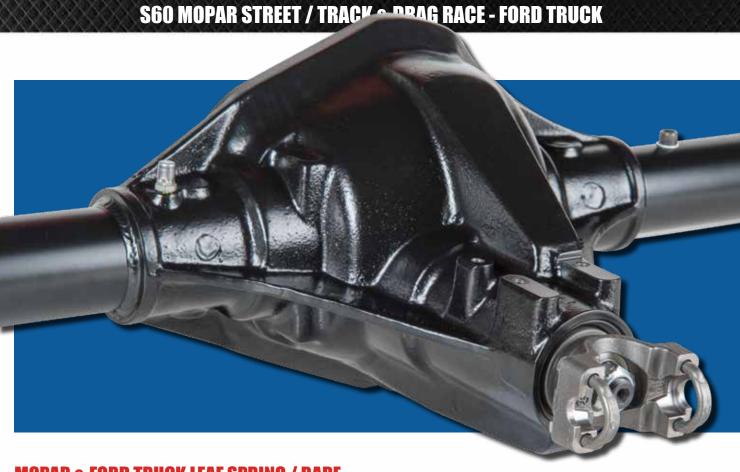

## MOPAR & FORD TRUCK LEAF SPRING / BARE (Custom widths are available at no additional charge)

PRSB05	Bare housing - no mounts / Spicer Trac-lock posi / 35 spline Alloy axles	\$2,256
PRSL05	Leaf spring housing / Spicer Trac-lock posi / 35 spline Alloy axles	\$2,376
PRSFT65F1000	5 / Spicer Trac-lock posi / 35 spline Alloy axles	\$2,376

From Trac-lock to Truetrack helical gear differential ......\$320 OPRS02 To 5/8" stud kit ......\$60 OPRS12 OPRS06 Options LPW HD aluminum cover .......\$125 OPRS08 Strange black powder coat aluminum cover ......\$50 OPRS18 Chrome moly pinion yoke ......\$51 H1199P-BLK

From Trac-lock to Detroit locker ......\$320

**Brakes** Late Big Ford 11" Drum brake kit installed ......\$520 Wilwood 11" Pro Street disc brake kit installed ......\$624

Wilwood 12" Pro Street disc brake kit installed .......\$775

Brake kit prices include \$25 installation charge - See Brake Kit Section for More Brake Options

OPRS01

Upgrades



## S60 MOPAR STREET / TRACK & DRAG RACE - FORD TRUCK

PRSFT65F10010 '65-'72 Ford F100 housing / L/W spool / standard gear / 35 spline Pro axles  Upgrades OPRS14 To 5/8" stud kit	\$54 \$2,350
PRSB15 Bare housing - no mounts / L/W spool / standard gear / 40 spline solid Pro axles PRSL15 Leaf spring housing / L/W spool / standard gear / 40 spline solid Pro axles  PRSFT65F10015 '65-'72 Ford F100 housing / L/W spool / standard gear / 40 spline solid Pro axles	\$2,350
PRSL15 Leaf spring housing / L/W spool / standard gear / 40 spline solid Pro axles PRSFT65F10015 '65-'72 Ford F100 housing / L/W spool / standard gear / 40 spline solid Pro axles .	
PRSFT65F10015 '65-'72 Ford F100 housing / L/W spool / standard gear / 40 spline solid Pro axles .	\$2,470
Hannedge ORDC1C To your drilled 40 action order	\$2,470
Upgrades OPRS16 To gun drilled 40 spline axles	\$82
Options OPRS22 Pro gear set	\$100
OPRS06 LPW HD aluminum cover	\$125
OPRS08 Strange black powder coat aluminum cover	\$50
OPRS18 Chrome moly pinion yoke	
H1199P-BLK Powder coat housing- satin black	\$159
Brakes Pro Race disc brake kit installed\$624	\$25555555555
Dual Pro Race disc kit installed\$1,045	
Pro Carbon disc brake installed\$2,975	



## **12 BLT BOLT-IN REAR ENDS**



**OVERVIEW:** The Strange 12 bolt casting is much stronger than the OEM 12 bolt, while still accepting the same components. The casting is poured from proprietary nodular iron which is substantially stronger than cast iron. The main caps are constructed from forged chrome moly, instead of cast iron like the originals. These improvements in materials, have allowed the casting to be made not only thinner and lighter, but also stronger. The casting has a torque arm mount cast as part of the case and a location for a Strange 3 channel sensor. It is designed as an

F-body replacement for the extremely weak 7.625", but can also be used as an upgraded 12 bolt in any leaf spring application.

The 3" O.D. tubes are plug welded and feature a 360° weld to the main casting. Large 3.150" ID housing ends are used along with a HD 1350 series yoke and u-bolts.

STREET/TRACK: The 12 bolt is equipped with a Eaton heavy duty clutch style posi unit, Standard gear set, 30 spline Alloy axles, 7/16" or 1/2" wheel studs, HD 1350 series yoke, u-bolt kit, and chrome rear cover. Standard gear ratio choices are 3.08, 3.42, 3.55, 3.73, 3.90, 4.11, 4.30, 4.56, 4.88, 5.14, & 5.38. Upgrades are available to the differential or differential and axle spline. Options include a chrome moly 1350 series yoke, LPW aluminum cover, and satin black powder coated housing. A powder coated housing is also supplied with the chrome cover.

The F-body 12 bolt is equipped with a Yukon heavy duty clutch style posi unit, Standard gear set, 33 spline Alloy axles, 12 mm or 1/2" wheel studs, HD 1350 series yoke, u-joint, u-bolt kit, and chrome rear cover.

12 bolt rear end available for 82-92 - will not fit OEM brakes (call). The PRG200 is designed for non ABS vehicles. An upgrade is available to custom caliper mounts that will adapt 1993-1997 F-body factory disc brakes.

The PRG210 is for 1998-2002 ABS applications and can be ordered for three or four channel systems. Options include a chrome moly yoke, LPW aluminum cover, and satin black powder coated housing. A powder coated housing is also supplied with the chrome cover.

**DRAG RACING:** The 12 bolt comes standard with a Pro Series lightweight steel spool, Standard gear set, 33 or 35 spline Pro Race axles, 1/2" wheel studs, HD 1350 series yoke, u-bolt kit, and chrome rear cover. It is available without mounts, with leaf spring mounts, or F-body mounts. Standard gear ratio choices are 3.08, 3.42, 3.55, 3.73, 3.90, 4.11, 4.30, 4.56, 4.88, 5.14, & 5.38. Pro gear are 4.11, 4.30, 4.56, 4.88, 5.14, 5.38,

& 5.57, 5.86, & 6.14. Upgrades are available to 5/8" wheel studs, Pro gear set, aluminum 33 spline spool, and Ultra Lite axle flanges. Options include a chrome moly yoke, LPW aluminum cover, lightened ring gear, MicroBlue services, and satin black powder coated housing. A powder coated housing is also supplied with the chrome cover.



PRG300	Bare housing without mounts / Eaton HD posi / 30 spline Alloy axles			
PRG310	Leaf spring h	ousing / Eaton H	D posi / 30 spline Alloy axles	\$2,546
	Upgrades	OPRG08		
$\Diamond\Diamond\Diamond$	$\Diamond \Diamond \Diamond \Diamond \Diamond$	OPRG06	To Yukon HD 33 spline clutch style posi & Strange 33 Alloy axles	
PRG200	F-Body housi	ng / Yukon HD po	osi / 33 spline Alloy axles	\$2,794
$\otimes \otimes \otimes$	Upgrades	OPRG12		
PRG210	F-Body housing for ABS / Yukon HD posi / 33 spline Alloy axles			
$\Diamond\Diamond\Diamond$	Upgrades	OPRG13	4 channel ABS reluctor rings	\$90
$\Diamond\Diamond\Diamond$	Options	OPRG17	Chrome moly 1350 yoke	\$51
800.0	8888	OPRG10	Chrome moly 1350 yokeLPW aluminum cover	\$115
$\times \times \times$	Street / Track Brakes		Wilwood 11" Pro Street disc brake kit installed	
			Wilwood 12" Pro Street disc brake kit installed	\$775
			Late Big Ford 11" Drum brake kit installed	\$520

30 & 33-spline street axle lengths are limited. Call for more information.

PRG320 PRG330				
PN0330		OPRG01		
	Upgrades		To Pro gear set	
		OPRS14	To 5/8 stud kit	
		OPRG16	To Aluminum 33 spline spool	
		A1006	To Ultra Lite axle flange	\$80
PRG235	F-Body housing	g, L/W steel spool	, Standard gear, and Pro Race axles	\$2,243
PRG230	F-Body 12 bolt	with mounts, L/W	steel spool, Pro gear, and Pro Race axles	\$2,564
	Upgrades	OPRS14	To 5/8 stud kit	\$54
		OPRG16	To Aluminum 33 spline spool	. \$150
		A1006	To Ultra Lite axle flange	\$80
	Options	OPRG17	Chrome moly 1350 yoke	\$51
		OPRG10	LPW aluminum cover	\$115
		D3596	Lighten ring gear	\$75
		D3598G	MicroBlue gear set	\$240
		D3598B	MicroBlue bearings	
		H1199P-BLK	Powder coat housing- satin black- with chrome steel cover	\$159
	Drag Race Bra	kes	Pro Race disc brake kit installed	\$624
	-		Dual Pro Race disc kit installed	\$1,045
			Pro Carbon disc brake installed	\$2,975

Brake kit prices include \$25 installation charge - See Brake Kit Section for More Brake Options Drag race axles available up to and including 35 spline

#### **DRAG RACE**


### DRAG RACE FLOATER KITS: Strange Drag Race floater-

kits coupled with a Strange 9"/9.50" Ultra Case assembly have become a standard for Pro Mod classes, Blown classes and other abusive drag racing applications. The floater kit provides excellent safety and durability for sportsman and professional drag racers. Each kit includes 4130 chrome moly spindles, steel drive plates, aluminum hubs, rotors, Timken bearings, seals, chrome-moly studs and steel lug nuts. Strange Drag Race floater kits are available with carbon or steel brakes. Floater

axles are not included with floater kits, but are available in either solid or gun drilled. Vehicles requiring a floater kit are under extreme forces. Due to the tremendous increase in torsional strength of a 40 spline axle in comparison to 35, Strange only offers 40 spline floater kits. Custom axles can be made with a smaller spline on the spool end if required, but axle torsional strength will be compromised.

## FLOATER KIT REDESIGNED STARTED IN 2012 AND FEATURES MANY KEY IMPROVEMENTS

- Larger bearings allow for increased spindle wall thickness and provide additional load capacity
- Solid preload sleeve ensures proper preload of hub bearings
- Positive spindle lock system maintains bearing preload under severe conditions
- Minimized distance to wheel mounting surface decreases stress imposed on spindles
- Spindle radius increased to .500" Vastly improving spindle integrity under bending loads
- Fully machined press-in wheel studs that eliminate stress risers and loosening of studs in hub
- Integral hub and rotor mounting lugs allow rotors to float and minimize components
- Hub lug design allows for simplified conversion between steel and carbon brakes
- Steel rotors increased in diameter to provide more braking capacity
- Now in Stainless Steel to withstand higher temperatures
- All kits are complete with billet calipers and brake pads

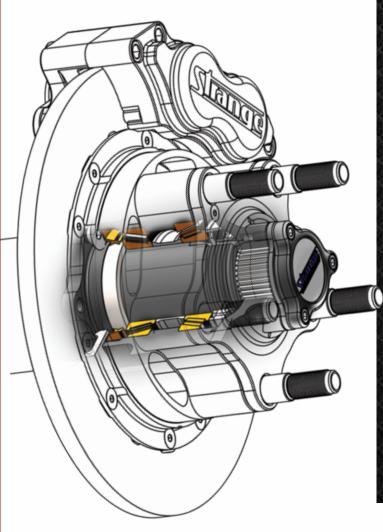



F2206WC	5 1/2" Bolt circle floater kit with carbon brake kit	\$5,160
F22065WC	5" Bolt circle floater kit with carbon brake kit	\$5,060
F22064VVC	4 3/4" Bolt circle floater kit with carbon brake kit	\$5,060
F2206	5 1/2" Bolt circle floater kit with stainless steel brake kit	\$3,160
F22065	5" Bolt circle floater kit with stainless steel brake kit	\$3,060
F22064	4 3/4" Bolt circle floater kit with stainless steel brake kit	\$3,060
A2040H24	Hy-Tuf gun drilled 40 spline floater axle- 24" or less- each	\$198
A2040H28	Hy-Tuf gun drilled 40 spline floater axle- 24 1/8" to 28"- each	\$214
A2040H32	Hy-Tuf gun drilled 40 spline floater axle- 28 1/8" to 32"- each	\$231
A2040H36	Hy-Tuf gun drilled 40 spline floater axle- 32 1/8" to 36"- each	\$249
A2140H24	Hy-Tuf solid 40 spline floater axle- 24" or less- each	\$165
A2140H28	Hy-Tuf solid 40 spline floater axle- 24 1/8" to 28"- each\$179	)
A2140H32	Hy-Tuf solid 40 spline floater axle- 28 1/8" to 32"- each\$193	3
A2140H36	Hy-Tuf solid 40 spline floater axle- 32 1/8" to 36"- each\$208	
A2040M*	300M gun drilled 40 spline floater axle- 20" or less- each	\$395
A2040M24*	300M gun drilled 40 spline floater axle- 20 1/8" to 24"- each	\$423
A2040M28*	300M gun drilled 40 spline floater axle- 24 1/8" to 28"- each	\$450
A2040M32*	300M gun drilled 40 spline floater axle- 28 1/8" to 32"- each	\$505
A2040M36*	300M gun drilled 40 spline floater axle- 32 1/8" to 36"- each	\$533
A2140M*	300M solid 40 spline floater axle- 20" or less- each	\$295
A2140M24*	300M solid 40 spline floater axle- 20 1/8" to 24"- each\$323	
A2140M28*	300M solid 40 spline floater axle- 24 1/8" to 28"- each\$350	
A2140M32*	300M solid 40 spline floater axle- 28 1/8" to 32"- each\$405	
A2140M36*	300M solid 40 spline floater axle- 32 1/8" to 36"- each\$433	

<sup>\*</sup> For extreme applications such as heavy high-powered drag radial vehicles, Strange strongly recommends 300M axles as they are 21% stronger than Hy-Tuf axles




## **PRO TOURING**

# **PRO TOURING FLOATER KIT:** The Strange Pro Touring full floating kit design dramatically increases safety in comparison to a traditional flanged axle assembly. The floater spindle supports vehicle

traditional flanged axle assembly. The floater spindle supports vehicle weight and resists cornering, braking, and accelerating loads, leaving the floater axle solely responsible for transmitting torque. A preload spacer between the tapered bearings bolsters maximum spindle nut torque eliminating bearing end play. Zero end play in the bearings eliminates piston knock-back encountered during hard cornering. Compact brake gap (3.50") clears most suspension components

located near original housing ends. The F5010 Pro Touring floater kit features 2" O.D. chrome moly spindles, 35 spline drive plates, multiple patterns for 4 1/2", 4 3/4", and 5" bolt circles, and 1/2" x 20 press-in wheel studs. The floater axles and brake kit are sold separately. The axles are 35 spline to mate to the drive plate, and the inboard splines are made to match your specific carrier. The option for 5/8" x 18 press-in wheel studs also includes stud sleeves, lug nuts and washers. There are also options to adapt 2010 and earlier, or 2011 and later Mustang ABS systems.

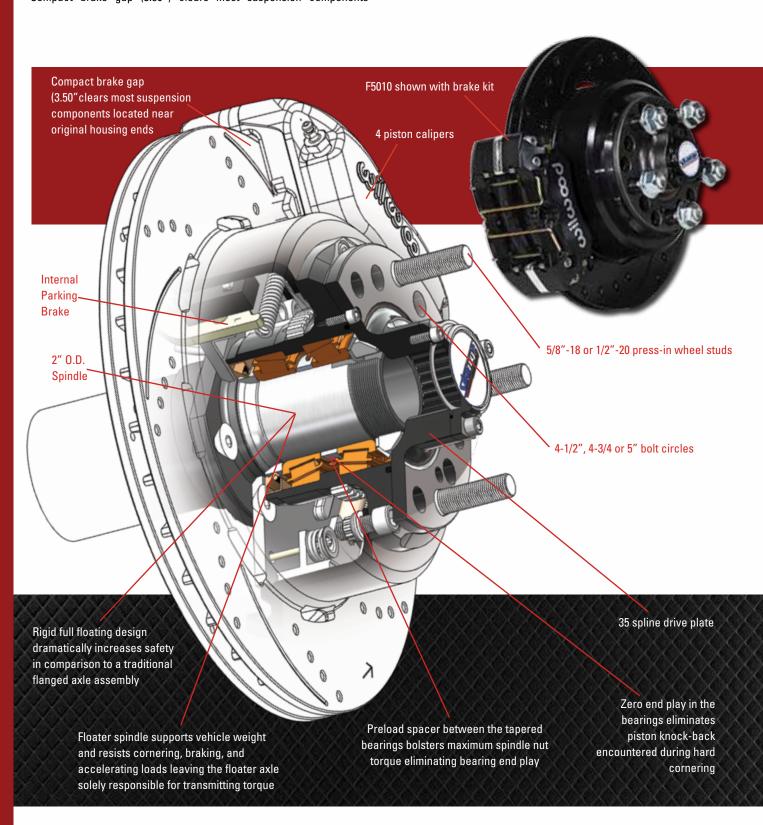

## NEW

F5056J

#### **PRO TOURING FLOATER KIT** FEATURING TOE-IN PLATES & CAMBERED SPINDLES

The F5012 floater kit provides all the benefits of the F5010 kit, but offers interchangable components to alter toe-in and camber. Includes your choice of toe-in plates available in zero, 1/16", or 1/8" per side and 0.5°, 1.0°, 1.5°, or 2.0° negative cambered spindles. Compared to building a housing with preset toe-in and camber, this kit simplifies housing construction and allows for simple changes later. Axles required for this kit are machined from 300M material and feature a crowned 24 outer spline.

F5010 F5012	Pro Touring floater kit- less axles and brakes\$1,100 With toe-in plates & cambered spindles- less axles and brakes\$2,100	
OPRS14	Replace 1/2" studs with 5/8" stud kit	\$54
ABSFM10	Adapt to accept 2005-2010 Mustang ABS sensor	
ABSFM11	Adapt to accept 2011-2014 Mustang ABS sensor	
A5100H24	Hy-Tuf outer 35 spline floater axle- 24" or less- each	\$160
A5100H28	Hy-Tuf outer 35 spline floater axle- 24 1/8" to 28"- each	\$171
A5100H32	Hy-Tuf outer 35 spline floater axle- 28 1/8" to 32"- each	
A5100H36	Hy-Tuf outer 35 spline floater axle- 32 1/8" to 36"- each	
A5100M	300M outer crowned 24 spline floater axle- 20" or less- each	\$295
A5100M24	300M outer crowned 24 spline floater axle- 20 1/8" to 24"- each	
A5100M28	300M outer crowned 24 spline floater axle- 24 1/8" to 28"- each	
A5100M32	300M outer crowned 24 spline floater axle- 28 1/8" to 32"- each	
A5100M36	300M outer crowned 24 spline floater axle- 32 1/8" to 36"- each	
B2712WC	Wilwood Pro Touring brake kit / 11" rotors / for 15" beadlock wheels / black caliper	s\$895
B2711WC	Wilwood Pro Touring brake kit / 12.19" rotors / black calipers	
B2711WCR	Wilwood Pro Touring brake kit / 12.19" rotors / red calipers	
B2714WC	Wilwood Pro Touring brake kit / 14" rotors / black calipers	
B2714WCR	Wilwood Pro Touring brake kit / 14" rotors / red calipers	
REPLACEMENT F	PARTS	
N1948	Hub bearing- Inner and outer- each	\$13
N1949	Hub race- Inner and outer- each	



Hub seal- each .....

## **DRAG RACE**

### **STEERING RACKS - BY STRANGE**

Two new door car racks have been recently introduced into our expanding line of steering components. These join our popular Dragster rack, fulfilling the need for quality steering system components as availability becomes an issue from other manufacturers. These units are designed for Drag Race use only, and feature the same dedication to workmanship that racers have come to expect. Proudly designed, machined, and assembled by Strange Engineering in the USA.

#### **DOOR CAR RACK & PINIONS**

#### **Body**

- 6061-T6511 billet aluminum
- Black anodized finish
- 20° horizonal pinion angle

#### **Rack & Pinion Gear**

- 4140 premium alloy steel
- Hardened rack & pinion gear
- 22 to 1 ratio
- 9/16"-26 spline pinion
- Utilizes common Mustang / Pinto joints

#### **Clevis Ends**

- 6061-T6500 billet aluminum
- Black anodized finish
- Accepts 3/8" high misalignment rod ends
- Adjustable clevis angles

#### **Pinion Side Mounting clamp**

• 7/16"-14 bolt holes on 1.250" centers

#### **Opposing Mounting Clamp**

• 3/8" -16 bolt holes on 1.380" centers

#### **Hi Temp Silicone Bellows**

Added protection in turbo applications

#### \$3448..... \$595

- 24.5 tie rod centers
- 4.25" total rack travel
- Vertical pinion angle 0° as shipped
- Adjustable upward to 20° or 40°
- 11.60" mounting clamp centers
- 5.85 lbs

#### S3448-195..... \$595

- 19.5 tie rod centers
- 4.75" total rack travel
- 16° downward pinion angle
- 6.10" mounting clamp centers
- 5 lbs

#### \$3449 - Tie Rod Kit For \$3448 / \$3348-195..... \$169

- 4130 seamless chrome moly tubing
- L/H & R/H Teflon® lined chrome moly rod ends
- 7/16" OD x 3/8" ID bushings
- 3/8"-24 x 1.5" grade 8 bolts & ESNA nuts

7/16"-20 taps in LH & RH threads required for threading





### **DRAGSTER RACK & PINIONS**

#### **Body**

- 6061-T6511 billet aluminum
- 375" bolt holes on 1.312" centers
- Black anodized finish

#### **Rack & Pinion Gear**

- 4140 chrome moly material
- Hardened for long service life
- 12 to 1 ratio
- 5/8"-36 spline pinion



### STEERING BOX - FUNNY CAR/ FRONT ENGINE DRAGSTER/ ALTERED

Strange worm gear steering box is ideal for Funny Cars and other front engine cars where drag link steering is used. These 10:1 boxes feature a serrated end on the steering shaft to provide a wide range of adjustment for the pitman arm. Lengths shown are from the center of the steering shaft, to the outside edge of pitman arm splines.



## STREET / TRACK & DRAG RACE

### **QUICK RELEASE STEERING HUBS**

Strange quick release steering hubs are SFI certified. The billet aluminum hubs are a completely self contained mechanism. A 4130 stub shaft is furnished for ease of installation and the keyed spline design allows for easy wheel orientation. The Q-1000 is designed for butterfly steering wheels, the Q-1200 fits Grant style wheels, and the Q1200SPAR fits 6 bolt Sparco wheels.

Your company logo can be laser etched on the horn button for a lasting impression. For a nominal one time charge, we can convert your PDF into the proper format for our system. An order for 25 buttons gives you the opportunity to further promote your vehicles. All our door car quick release hubs are available without a horn button specifically for this nice finishing touch.



ú			
	Q1000	Strange quick release steering hub for Butterfly wheel	
	Q1200	Strange quick release steering hub for Grant wheel\$116	
	Q1200NB	Strange quick release steering hub for Grant wheel- No horn button \$105	5
	Q1200SPAR	Strange quick release steering hub for Sparco wheel\$116	
į	Q1200SPARNB	Strange quick release steering hub for Sparco wheel- No horn button \$10	5

### **DRAGSTER / ALTERED STEEL SPINDLES**

Strange Dragster / Altered spindles are machined to exacting standards from forged 4130 chrome-moly heat treated steel. The spindles are black oxide coated and bushed. Hollow king pins are machined for lubricant delivery, heat treated, and finish ground. These pins feature a grease fitting allowing convenient lubrication of bushings. Two 5" steering arms, end caps, thrust washers, spindle nuts, cotter pins, and weld bosses are included.



### **FUNNY CAR ADJUSTABLE HEIGHT SPINDLES**

Strange Funny Car adjustable height spindles allow for chassis preload adjustments to be made at the track by simply relocating spacers. Our billet aluminum spindle body and heat treated spindle accept all existing Anglia style spindle mount wheels. The spindle diameter for the inner bearing has been increased for strength. New inner bearings, races, and seals are provided to adapt Anglia wheels. Hollow king pins feature a unique system to provide lubrication to the bushings via an easily accessible grease fitting. The spindles include adjustable height shims, weld bosses, inner wheel bearings, races, seals, semi-finished steering arms, end caps, spindle nuts, and cotter pins. Steel or carbon front brake kits are available.

		0 0
S3423 S3423NA	Funny Car adjustable height spindle kit	A SATION

### TECHNICAL



By use of friction, brakes convert kinetic energy into heat and dissipate it into the atmosphere. Kinetic energy is the amount of energy stored in a vehicle in motion. The basic factors that effect this are weight and speed. A heavy car takes more power to get up to the same speed as a lighter car, but will have a greater amount of stored energy. Therefore, it has to dissipate more heat to come to a stop. Speed has even a larger influence since it is squared in the calculation for kinetic energy. A vehicle traveling at 120 mph, has four times the stored energy than when it was doing 60 mph. What may appear to be a mild increase in mph, causes a much greater burden on the braking system.

MASTER CYLINDER SELECTION - PEDAL / HANDLE RATIO - PRESSURE: The 1.032" master cylinder is recommended for systems using single piston or two piston calipers up front, and four piston calipers in the rear. The 1.125" master cylinder is used with four piston calipers in both the front and rear. Brake pressure should always be checked with a brake pressure gauge before

use. In disc brake applications used for drag racing only, front brake pressure should be 550 to 650 lbs and rear brake pressure 1,000 to 1,100 lbs. These pressures should be achieved with a lot of effort since they are at "lock-up" of the tires and the actual normal stopping pressures will be lower.

1.032" bore master cylinder: Pedal ratio- 5.5 to 1 / Handle ratio- 11 to 1 1.125" bore master cylinder: Pedal ratio- 6.5 to 1 / Handle ratio- 13 to 1

MOUNTING: The master cylinder, pedal / handle assembly, and calipers should be rigidly mounted. Movement or flex of the mounting location can cause inconsistent or spongy brake feel. Regardless of the pedal ratio, the master cylinder push rod needs to be parallel with the master cylinder while maximum brake pressure is achieved. This will promote even loading and wear on the piston providing the longest life possible. The bleeder screws should be the highest part of the caliper so that air can escape during bleeding. If this is not possible, the calipers can be rotated for bleeding then reinstalled. The brake calipers and pads need to be square to the rotors to promote even pad wear, consistent pedal feel, and eliminate brake drag. Most Strange 4-piston calipers have staggered piston diameters, therefore, they are directional and the arrow on the caliper must point in the direction of normal rotation of the rotor.

**CALIPER SELECTION:** Single piston front calipers are used for spindle mount wheels only. They should be used in vehicles weighing no more than 2,600 lbs that always deploy a parachute. Vehicles exceeding these limitations will experience poor pad life and will cause the rotors to overheat and warp. Two piston calipers are used in the front on vehicles with five lug wheels weighing up to 2,600 lbs. Four piston calipers are used in the front on vehicles with five lug wheels exceeding 2,600 lbs and in all rear applications.

PAD SELECTION: Soft metallic pads, used in all front applications, have excellent cold holding abilities with decent fade resistance. They are also used in rear applications where the vehicle does not exceed 150 mph in the 1/4 mile. The high temp and hard metallic pads are used in "rear only" applications exceeding 150 mph. High temp pads have a much higher threshold before brake fade than the soft metallic, but sacrifice starting line holding capability. The hard metallic have almost the same resistance to brake fade as the high temp, but offer better cold holding ability. They do tend to transfer additional pad material onto the brake rotor surface that has to be occasionally removed. On vehicles requiring the rear brakes to hold on the starting line under additional duress, such as loading torque converters or spooling turbochargers, the soft metallic pads would be a better choice due to their cold holding characteristics. Dual rear calipers would further enhance this capability.

PLUMBING: Braided stainless steel Teflon® lined hoses should be used only in flex applications, while 3/16" OD steel or stainless steel tubing should be used for the rest of the system. All lines should be firmly secured and isolated from vibration. All connections should be tight and NPT fittings sealed with Teflon® thread sealer. In applications where the master cylinder is mounted below the calipers, a 2 lb. residual pressure valve should be plumbed at the exit port(s) of the master cylinder. This keeps fluid from returning to the lowest point, the master cylinder, and pulling the caliper pistons back in their bores. If using a Strange master with drum brakes in the system, a 10 lb. residual valve must be installed in the line going to the drum brakes regardless of master cylinder location. When calipers or master cylinders are changed in an OEM system, the stock proportioning valve should be removed in favor of an adjustable proportioning valve. In most drag racing applications, it should be plumbed between the master cylinder and the front calipers to limit pressure. For street applications, or a system using disc front / drum rear, the proportioning valve would be plumbed between the master cylinder and the rear brakes. In either application, adjustments should be made to the valve in order to achieve the same braking threshold for front and rear brakes.

#### TECHNICAL



**BRAKE FLUID:** It is recommended to use DOT 4, DOT 5.1, or a high performance glycol based brake fluid for the braking temperatures experienced during drag racing. When changing to a different brake fluid, completely flush the system in order to experience the benefits of a higher temperature rated fluid. DOT 5 (Silicone based) brake fluid is not recommended for racing applications for several reasons. It does not mix with other fluids requiring a complete system rebuild, it is slightly compressible giving a soft pedal, and it does not absorb water. Since it will not absorb water, when moisture enters the system it settles to the lowest point which in most cases is the brake calipers. At braking temperatures moisture easily boils causing a loss or lack of pedal. Brake fluid should be changed at the beginning of each season to remove the absorbed water and any other contaminates.

	Advantages	Disadvantages	<b>Boiling Point</b>		
			Dry	Wet	
DOT 3	Inexpensive / Absorbs water / Mixes with DOT 4 & 5.1	Lowest boiling point / Eats paint	400	285	
DOT 4	Higher boiling point / Absorbs water / Mixes with				
	DOT 3 & 5.1	Eats paint	445	310	
DOT 5	High boiling point / Does not eat paint	Not absorb water / Water settles & causes corrosion	500	355	
		Difficult to bleed / Will not mix with DOT 3, 4, & 5.1			
DOT 5.1	High boiling point / Absorbs water / Mixes with DOT 3 & 4	More expensive / Eats paint	527	365	

**BLEDING:** Fill the master cylinder reservoir with new DOT 4 or DOT 5.1 brake fluid. Start with the caliper furthest from the master cylinder and work your way to the caliper that is closest. Slide a clear plastic hose on the end of the bleeder screw. Open the bleeder screw approximately one turn and slowly depress and hold the brake pedal all the way down. Close the bleeder screw and release the brake pedal. Repeat this sequence until fluid comes out of the bleeder clear and free of air bubbles. Periodically check the fluid level in reservoir while bleeding and refill as necessary. After bleeding is complete, check entire system for leaks and the fluid level in the master cylinder.

**BEDDING PROCEDURE:** A bedding procedure is necessary to avoid premature brake fade, uneven pad deposits on the rotors, pad and rotor damage, and provide the best braking performance and the longest component life. It consists of 8-10 brake applications increasing in harshness while allowing the brakes to cool slightly in between; do not apply or drag the brakes between stops. After the last stop, the brakes should be allowed to cool completely. The concept is to slowly cycle the brakes up to operating temperature and back down avoiding thermal shock. A transfer of pad material to the rotor surface occurs that coats and protects the rotor, creating the actual wear surface. For best results, new pads should be bedded with seasoned rotors and new rotors should be bedded with seasoned pads.

#### **COMMON ISSUES**

#### **BRAKE DRAG**

Master cylinder piston not fully retracting
Calipers not square to rotors
Tapered brake pad material
Incorrect residual pressure valve
Using drum brake master with disc brakes
Using factory proportioning / combination valve
Defective line-lock
Contamination of brake fluid within the calipers

#### **PULSING PEDAL**

Warped rotors Rotor faces not parallel Excessive play in wheel bearings Tire / wheel assembly out of balance

#### **SOFT OR SPONGY PEDAL**

Pedal ratio too high
Master cylinder bore too small
Old brake fluid
Air in system
Deflecting caliper
Caliper not square to rotor
Too much flex line in system
DOT 5 (Silicone) fluid in system

#### HARD PEDAL

Pedal ratio too low Master cylinder bore too large Misalignment of master cylinder push-rod

## **STEEL BRAKE KITS: DRAG RACE ONLY**

**4-PISTON DIRECTIONAL CALIPER** is standard in all front steel 4-piston, rear Pro Series, and Pro Series II brake kits that features an aluminum caliper in 1.750" and 1.625" piston bore sizes. Directional calipers allow pad loading and wear to be balanced against the natural changing temperatures across the pad face. Coupled with superior Strange caliper bridge-bolt strength, the dissimilar piston sizes allow for optimum braking, feel, and more consistent pad wear. The caliper also features anti-rattle clips and stainless steel pistons.

**4-PISTON BILLET CALIPER** is used in the new Strange Pro Series II Stainless brake kits. Similar to the caliper used in the Pro Carbon brake kits, it has the same superior bridge strength provided by the billet aluminum bodies. This brake caliper is designed for steel brakes and uses non-insulated billet pistons that are stiffer and longer providing additional stability and improved pedal feel. All four stainless steel pistons are 1.750" in diameter providing 7% greater clamping force in comparison to directional calipers, and are available in black or red.

**4-PISTON BILLET LOW PROFILE CALIPER** is an option in Strange Pro Series rear brake kits. Essential when using some of the newly designed 15" bead lock wheels, this caliper fits where no other can. Added ribs improve overall stiffness and drastically reduces deflection. Enhanced piston retraction reduces brake pad drag. Each caliper utilizes four individual brake pads to eliminate the problems experienced with warped backing plates. (Image shown below)

**4-PISTON NON-DIRECTIONAL CALIPER** is used in all S-Series rear brake kits that features an aluminum caliper with 1.750" piston bore sizes throughout. The S-Series caliper provides excellent bridge-bolt strength and increased clamping force. The caliper also features anti-rattle clips and stainless steel pistons.

**2-PISTON CALIPER** is standard in medium duty front brake kits. A fully machined aluminum caliper that features 1.750" piston bore sizes and is a lighter weight option, compared to 4-piston caliper, for vehicles under 2,600 lbs.

**1-PISTON "FLOATING" CALIPER** is used for F/C and spindle mount front brake kits. Employing a unique slider assembly that features internal bearings and precision ground sliders, prevents the caliper from binding or sticking which commonly occurs with other brands. This single piston caliper utilizes a square pad that slides freely, which prolongs pad life.

**DIRECTIONAL SLOTTED ROTORS** are used in all steel brake kits. The slots are precisely milled into the rotor surface to create a thermally stable braking surface with added benefits of reduced rotating weight and promoting braking consistency by eliminating pad glaze. The slots location, size, and shape were meticulously selected after field and dyno testing.

The slots provide a thermally stable rotor which vastly reduces distortion and/or warping of the rotor. Even though it would be far less expensive to offer only one slotted rotor, our testing clearly dictated the best slot design and placement required a rotational shaped slot; hence- directional rotors. The slot design also minimizes rotational weight. Unlike drilled rotors, the reduction in weight is achieved without sacrificing stability.





ONE PIECE ROTOR forging is used to produce all brake rotors except for Pro Series II. The one piece rotor is more expensive to manufacture when compared to the industries common 2 piece steel rotor design that uses bolts to hold it to an aluminum hat. Most two piece steel rotors are taken from inferior steel burn-outs and require additional assembly after purchasing. The one piece forged steel rotor offers several advantages when compared to bolt together two piece designs: (1) Due to the strength of our one piece forged steel rotor, a considerable amount of weight is eliminated in the steel hat area (slotted version). Aluminum hats are .250" to .500" thick and are not lightened in the side of the hat. The Strange rotor is only .125" thick in the mounting surface and has additional lightening holes on the side and top of the hat. In most cases, the slotted version rotor is lighter than bolt together two piece designs. (2) It eliminates mounting bolts that conduce binding and require constant torquing and/or cumbersome safety wire. (3) It provides superior dissipation of heat created by braking- due to one

integral design (4) It accommodates several axle bolt circles (5) It can be re-surfaced to

eliminate brake pad material build-up.

TWO PIECE FLOATING ROTOR is standard in front and rear Pro Series II brake kits. The already successful 2 piece floating rotors have been further refined. Racers have depended upon the proven two piece design since 2008. Through further R&D the 2012 version features a proprietary steel that has increased yield strength by 43%, tensile by 30% and significantly improved resistance to warping and creep at high temperatures. The floating rotor design allows for axial and radial growth of rotor as temperature increases, which greatly reduces warping and coning tendencies. In addition, the design eliminates bolts to attach the hat and rotor, which can become loose, require safety wire and require assembly. The rotor hat is fully machined from an aluminum forging which is strong, lightweight, and provides an ideal wheel mounting surface. The two-piece rotor, when compared to the already lightweight forged steel rotor, is .60 lbs lighter per corner (1.20 lbs per pair). The two piece rotor is ideal for weight reduction and abusive braking conditions.

TWO PIECE FLOATING (STAINLESS STEEL) ROTOR offers a new enhancement to the two piece floating rotor design. Stainless steel is typically known to be corrosion resistant, but it's main purpose here is the superior strength it provides at elevated temperatures. Thermal stress relieving further improves material stability resulting in high speed braking ability, without the concerns of warping or distortion. This rotor is included in the new

Strange Pro Series II Stainless brake kits. It is compatible with soft and hard metallic pads.

Two-Piece hat (pictured right) - Fully machined from forged aluminum. The attention to detail is seen in the lightening grooves and pockets. The unique lug design permits axial and radial growth of the rotor.

Two Piece Stainless Steel Rotor (Above)



## **STEEL BRAKE KITS: DRAG RACE ONLY**



#### PRO SERIES II REAR BRAKE KIT

with its two-piece floating rotor design, has been utilized by professional racers throughout drag racing. The rotor and hat design allow for axial and radial growth of rotor as temperature increases, which greatly reduces warping and coning tendencies. In addition, it eliminates any bolts to attach the hat to the rotor which can become loose, require safety wire and additional labor. Pro Series Il rear kits, when compared to the already lightweight Pro Series kit, is 1.20 lbs lighter. This kit features Strange 4-piston directional calipers (1.625" / 1.750" bores) with stainless steel pistons, caliper o-rings designed to minimize drag, billet aluminum caliper mounts, choice of brake pads (soft or hard metallic) and mounting hardware. Dual calipers are optional. Brake kit weighs only 22.10 lbs with soft metallic pads. All brake pads materials are available in these rear kits. Upgrade to billet calipers for \$80. Upgrade to low profile calipers for \$150. Two upgrades necessary for dual brakes.

PRO SERIES REAR KIT features Strange forged steel one piece rotor, which is far superior to common bolt together two piece rotors in weight reduction, strength and longevity. All Strange Pro Race rotors are slotted. Slotting was developed by Strange to minimize warpage, while maximizing weight reduction. Every kit features the sought after Strange 4-piston directional calipers. The directional calipers accomplish superior bridge bolt strength at only 2.70 pounds. Strange directional calipers feature 1.750" and 1.625" OD stainless steel pistons to assure optimal pad wear and exceptional pedal / handle feel. Every Strange caliper is internally ported and is designed to assist piston retraction. Brake kit weighs only 23.70 lbs with soft metallic pads. All brake pads materials are available in these rear kits. Upgrade to billet calipers for \$80. Upgrade to low profile calipers for \$150. Two upgrades necessary for dual brakes.



Soft



B5010

Hard



B5020

**BRAKE PADS** are offered in soft and hard metallic compositions. Soft metallic, used in all front brake kits, are one of three pad options in rear kits. They have excellent starting line holding capabilities and, in rear applications, are best suited in vehicles traveling less than 150 mph. The hard metallic pads are for rear only, have a much higher temperature rating, used in vehicles doing over 150 mph, but sacrifice on cold holding. The hard pads will transfer some additional pad material to the brake rotor surface which will eventually need to be removed when replacing the brake pads.



## **STEEL FRONT BRAKE KITS: DRAG RACE ONLY**



#### STRANGE LIGHTWEIGHT FRONT KITS

(pictured left - mounted on a Strange Ultra Strut) are designed for spindle mount wheels. This kit features the Strange single piston caliper kit. The caliper kit employs a unique slider assembly that features internal bearings and precision ground sliders to prevent the caliper from binding or sticking, which is common with other brands. The single piston caliper utilizes a square pad that slides freely, which prolongs pad life.

The lightweight spindle mount kit includes compact 10" diameter directional slotted rotors. Kits are offered in Pro Series (one piece forged steel rotors) and Pro Series II (two piece floating rotors). Billet caliper mounts and hardware complete the kit.

**Each Front Kit Includes:** Strange single piston billet calipers, slider assembly, soft square pads, slotted steel rotors, and billet aluminum caliper mounts. Due to numerous spindle mount wheel designs, kits do not include wheel bearings and seals- contact your wheel manufacturer. Pro Series Kit (forged steel rotors) weighs 16 lbs and the Pro Series II (two piece floating rotor) kit weighs 15.2 lbs.



#### STRANGE MEDIUM DUTY FRONT KITS

come standard with Strange 2-piston calipers and would be a lighter option in comparison to the 4-piston calipers found in Heavy Duty kits. Medium Duty brakes are offered for Strange aluminum struts that utilize 5 lug bolt-on wheels. The kits include forged slotted steel rotors, calipers, soft metallic pads, billet caliper mounts, billet aluminum hubs, bearings, races, seals, and 1/2" stud kit. Other medium duty kits do not include hubs and bearings as the stock hubs need to be reused. Two piston calipers are a weight reduction option for vehicles under 2,600 pounds. Two piston brake kits are 5 lbs lighter, compared to 4-piston.

## **STEEL FRONT BRAKE KITS: DRAG RACE ONLY**



B4110WC pictured above - is a typical 4-piston front brake kit; however, kits vary per application

### STRANGE HEAVY DUTY FRONT BRAKE KITS

Strange Heavy Duty front brake kits offer a tremendous weight savings over OEM brake components. The entire Pro Series 4-piston brake kit, with forged slotted rotors, weighs only 33.50 lbs. The Pro Series II, featuring 2 piece floating rotors, weighs 32.50 lbs. Both kit weights include bearings, hubs, rotors, pads, calipers, pads, etc... Strange Engineering's brake kits are unsurpassed in detail. One example of our unparalleled attention to detail is evident in our hub design. Each hub has one bolt circle. Instead of adding an additional bolt circle, the hub is scalloped and lightening holes are milled to reduce rotating weight. The hub cap is fully machined and hollowed out to maximize weight reduction. We feel that the extra effort into weight reduction is expected from customers who want a premium quality Drag Racing brake kit.

Typical Heavy Duty front kits Include: Strange 4-piston billet directional calipers, soft metallic pads, forged slotted steel rotors, scalloped aluminum hubs with Timken® bearings and races, seals, studs, billet aluminum mounts, and necessary mounting hardware.



## **NEW STEEL FRONT BRAKE KIT: DRAG RACE ONLY**



This front hub kit is offered to reduce rotational friction in Chevrolet COPO Camaros. In the highly competitive classes that these vehicles compete, it is important to persue every option available to gain an edge. These kits arrive fully assembled and are an easy bolt-on installation.

#### **CHEVY COPO CAMARO**

Low Drag Hub Kit - B4181LD - \$1,095

Reduced Drag 0.5 inch lbs breakaway torque (One eighth of stock COPO) Reduced Weight
Assemblies 5.8 lbs per side
(Almost 3 lbs less per side than stock)

#### KIT INCLUDES

Billet Aluminum Hub Housings

- Maintains strength while reducing weight
- Clear anodized to resist corrosion

4 3/4" B.C. Hy-Tuff Flanges

- Same material as Pro Race axles
- Pocket milled & core drilled for maxi mum weight reduction

Precision Fit Angular Contact Ball Bearings

- Low drag bearings with minimal preload
- Lubricated with lightweight low viscosity oil

#### Also Includes

- Low drag seals
- 1/2"-20 x 2" wheel stud kit
- Inner spindle nut, retainer, keyed washer, cotter pin, & cap



#### **APPLICATIONS**

MAKE	MODEL	YEAR	ОЕМ	PART#	TYPE	BOLT CIRCLE	PRICE	NOTES
BUICK								
Dolon	APOLLO	73-74	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		73-74	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		75	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
	CENTURY	73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
	SKYLARK	75-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
	GRAND NATIONAL	79-87 DISC		B4122WC	HEAVY DUTY	4 3/4"	\$795	
	REGAL	79-87	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	
CHEVY								
	BLAZER 4X2	83-89	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	FOR 100.5" WHEEL BASE
	CAMAR0	67-69	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		67-69	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		70-78	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
		79-81	DISC	B4116WC	HEAVY DUTY	4 3/4"	\$795	
		82-92	DISC	B4118WC	HEAVY DUTY	4 3/4"	\$795	
		93-01	DISC	B4180WC	HEAVY DUTY	4 3/4"	\$995	
	CHEVELLE	67-72	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		67-72	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
	CHEVY II / NOVA	67-74	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		67-74	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
	CHEVY	49-53	DRUM	B4164WC	HEAVY DUTY	4 3/4"	\$950	
		55-57	DRUM	B4172WC	HEAVY DUTY	4 3/4"	\$795	
	CORVETTE	63-64	DRUM	B4166WC	HEAVY DUTY	4 3/4"	\$835	
		65-68	DRUM	B4168WC	HEAVY DUTY	4 3/4"	\$835	
		69-82	DISC	B4170WC	HEAVY DUTY	4 3/4"	\$835	
		91-96	DISC	B4183WC	HEAVY DUTY	4 3/4"	\$995	
		97-04	DISC	B4178WC	HEAVY DUTY	4 3/4"	\$795	REUSES STOCK HUBS
	EL CAMINO	67-72	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		67-72	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
		79-87	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	
	IMPALA	77-78	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	FOR 11" DISC SPINDLES
	MALIBU	73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
		79-87	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	
	MONTE CARLO	70-72	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		70-72	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
		79-88	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	
	NOVA	62-74	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		75-78	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	500 00000000000000000000000000000000000
	NOVA - SPECIAL	75-78	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	FOR DROPPED SPINDLES
	S10 4X2	82-90	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	
DODGE								
	CORONET	66-69	DRUM	B4158WC	HEAVY DUTY	4 1/2"	\$795	
		70-72	DISC	B4159WC	HEAVY DUTY	4 1/2"	\$795	

## STEEL FRONT BRAKE KITS: DRAG RACE ONLY

## **APPLICATIONS - CONTINUED**

MAKE DODGE	MODEL	YEAR	ОЕМ	PART#	ТҮРЕ	BOLT CIRCLE	PRICE	NOTES
	CHALLENGER 70-	72 70-72 73-74	DRUM DISC DISC	B4158WC B4159WC B4160WC	HEAVY DUTY HEAVY DUTY HEAVY DUTY	4 1/2" 4 1/2" 4 1/2"	\$795 \$795 \$795	FOR 10" DRUM SPINDLES
		09-12	DISC	B4184WC	HEAVY DUTY	4 1/2"	\$895	
	CHARGER	66-69 70-72	DRUM DISC	B4158WC B4159WC	HEAVY DUTY HEAVY DUTY	4 1/2" 4 1/2"	\$795 \$795	
	DART	63-72 65-72 73-76	DRUM DRUM DISC	B4156WC B4162WC B4160WC	HEAVY DUTY HEAVY DUTY HEAVY DUTY	4 1/2" 4 1/2" 4 1/2"	\$795 \$795 \$795	FOR 9" DRUM SPINDLES FOR 10" DRUM SPINDLES
	DUSTER	65-72	DRUM	B4162WC	HEAVY DUTY	4 1/2"	\$795	FOR 10" DRUM SPINDLES
	LANCER	61-62	DRUM	B4156WC	HEAVY DUTY	4 1/2"	\$795	FOR 9" DRUM SPINDLES
	ROAD RUNNER	68-69 70-72	DRUM DISC	B4158WC B4159WC	HEAVY DUTY HEAVY DUTY	4 1/2" 4 1/2"	\$795 \$795	
	R/T	67-69	DRUM	B4158WC	HEAVY DUTY	4 1/2"	\$795	
	SATELLITE	70-72	DISC	B4159WC	HEAVY DUTY	4 1/2"	\$795	
	SUPER BEE	68-69 70	DRUM DISC	B4158WC B4159WC	HEAVY DUTY HEAVY DUTY	4 1/2" 4 1/2"	\$795 \$795	
FORD								
	FAIRLANE	66-69	DRUM	B4135WC	HEAVY DUTY	4 1/2"	\$795	
		66-69	DRUM	B4134WC	HEAVY DUTY	4 3/4"	\$795	
	FAIRMONT	81-83	DISC	B4142WC	HEAVY DUTY	4 3/4"	\$795	
	FALCON	66-69	DRUM	B4135WC	HEAVY DUTY	4 1/2"	\$795	
	FORD	66-69	DRUM	B4134WC	HEAVY DUTY	4 3/4"	\$795	
	FORD	42-48	DRUM	B4176WC	HEAVY DUTY	4 3/4"	\$835	
	MAVERICK MUSTANG*	1972 1965	DRUM DRUM	B4136WC B4135WC	HEAVY DUTY HEAVY DUTY	4 3/4" 4 1/2"	\$795 \$795	* 289 Hardtop only
	MUSTANG	1965	DRUM	B4133WC	HEAVY DUTY	4 3/4"	ุง≀95 \$795	* 289 Hardtop only
		67-69	DRUM	B4135WC	HEAVY DUTY	4 1/2"	\$795	209 Hardtop only
		67-69	DRUM	B4134WC	HEAVY DUTY	4 3/4"	\$795	
		70-73	DRUM	B4132WC	HEAVY DUTY	4 1/2"	\$795	
		70-73	DRUM	B4133WC	HEAVY DUTY	4 3/4"	\$795	
	MUSTANG II	74-78	DISC	B4141WC	HEAVY DUTY	4 1/2"	\$795	
		74-78	DISC	B4140WC	HEAVY DUTY	4 3/4"	\$795	
	MUSTANG	82-86	DISC	B4143WC	HEAVY DUTY	4 1/2"	\$795	
		82-86	DISC	B4142WC	HEAVY DUTY	4 3/4"	\$795	
		87-93	DISC	B4143WC	HEAVY DUTY	4 1/2"	\$795	FOR 4 CYL SPINDLES
		87-93	DISC	B4142WC	HEAVY DUTY	4 3/4"	\$795	FOR 4 CYL SPINDLES
	INC COBRA	87-93	DISC	B4145WC	HEAVY DUTY	4 1/2"	\$795	FOR 8 CYL SPINDLES
	INC COBRA	87-93	DISC	B4144WC	HEAVY DUTY	4 3/4"	\$795	FOR 8 CYL SPINDLES
		94-04	DISC	B4446WC	MEDIUM DUTY	4 1/2"	\$549	REUSES STOCK HUBS
		94-04	DISC	B4146WC	HEAVY DUTY	4 1/2"	\$895	
		05-14	DISC	B4148WC	HEAVY DUTY	4 1/2"	\$695	REUSES STOCK HUBS
		05-14	DISC	B4152WC	HEAVY DUTY	4 1/2"	\$895	
	PINTO	71-72	DRUM	B4136WC	HEAVY DUTY	4 3/4"	\$795	
		71-72	DISC	B4138WC	HEAVY DUTY	4 3/4"	\$795	
		74-80	DISC	B4141WC	HEAVY DUTY	4 1/2"	\$795	
		74-80	DISC	B4140WC	HEAVY DUTY	4 3/4"	\$795	
	RANCHERO	67-69	DRUM	B4135WC	HEAVY DUTY	4 1/2"	\$795	
	THUNDSON	67-69	DRUM	B4134WC	HEAVY DUTY	4 3/4"	\$795	
	THUNDERBIRD	82-86	DISC	B4143WC	HEAVY DUTY	4 1/2"	\$795	
		82-86	DISC	B4142WC	HEAVY DUTY	4 3/4"	\$795	50 D 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		87-88	DISC	B4143WC	HEAVY DUTY	4 1/2"	\$795	FOR 6 & 8 CYL SPINDLES
		87-88	DISC	B4142WC	HEAVY DUTY	4 3/4"	\$795	FOR 6 & 8 CYL SPINDLES
		87-88	DISC	B4145WC	HEAVY DUTY	4 1/2"	\$795	FOR 4 CYL SPINDLES
		87-88	DISC	B4144WC	HEAVY DUTY	4 3/4"	\$795	FOR 4 CYL SPINDLES

#### **APPLICATIONS - CONTINUED**

MAKE	MODEL	YEAR	OEM	PART#	TYPE	BOLT CIRCLE	PRICE	NOTES
GMC								
	SPRINT	71-72	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		71-72	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	
		79-87	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	
	JIMMY 4X2	83-90	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	FOR 100.5" WHEEL BASE
	S15 4X2	82-90	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	
MERCU	RY							
	COMET	66-69	DRUM	B4135WC	HEAVY DUTY	4 1/2"	\$795	
		66-69	DRUM	B4134WC	HEAVY DUTY	4 3/4"	\$795	
	COUGAR	67-69	DRUM	B4135WC	HEAVY DUTY	4 1/2"	\$795	
		67-69	DRUM	B4134WC	HEAVY DUTY	4 3/4"	\$795	
		81-88	DISC	B4143WC	HEAVY DUTY	4 1/2"	\$795	
		81-88	DISC	B4142WC	HEAVY DUTY	4 3/4"	\$795	
OLDSMO								
	F85	67-72	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		67-69	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES*
	CUTLASS	73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
		79-88	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
	DELTA 88	77-78	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
	OMEGA	73-74	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		73-74	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		75-78	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
PLYMOL	ITH							
	BARRACUDA	64-69	DRUM	B4156WC	HEAVY DUTY	4 1/2"	\$795	FOR 9" DRUM SPINDLES
		65-69	DRUM	B4162WC	HEAVY DUTY	4 1/2"	\$795	FOR 10" DRUM SPINDLES
		70-72	DRUM	B4158WC	HEAVY DUTY	4 1/2"	\$795	FOR 10" DRUM SPINDLES
		70-72	DISC	B4159WC	HEAVY DUTY	4 1/2"	\$795	
		73-74	DISC	B4160WC	HEAVY DUTY	4 1/2"	\$795	
	BELVEDERE	66-69	DRUM	B4158WC	HEAVY DUTY	4 1/2"	\$795	
		70	DISC	B4159WC	HEAVY DUTY	4 1/2"	\$795	
	GTX	67-69	DRUM	B4158WC	HEAVY DUTY	4 1/2"	\$795	
		70-71	DISC	B4159WC	HEAVY DUTY	4 1/2"	\$795	
	PLYMOUTH	62-64	DRUM	B4158WC	HEAVY DUTY	4 1/2"	\$795	
	ROAD RUNNER	68-69	DRUM	B4158WC	HEAVY DUTY	4 1/2"	\$795	
	HOAD HONNEN		DISC		HEAVY DUTY	4 1/2"		
	VALIANT	70-72		B4159WC			\$795	EOD O" DDIIM CDIMDLEC
	VALIANT	60-72	DRUM	B4156WC	HEAVY DUTY	4 1/2"	\$795	FOR 9" DRUM SPINDLES
		65-72	DRUM	B4162WC	HEAVY DUTY	4 1/2"	\$795	FOR 10" DRUM SPINDLES
		73-76	DISC	B4160WC	HEAVY DUTY	4 1/2"	\$795	

To order brake kit with two piece rotors- Include "2" at the end of he part number (i.e. B4110WC2) Add \$100 to prices shown for medium and heavy duty kits and \$150 for lightweight kits

<sup>\*</sup> SEE INSTRUCTION SHEET FOR DETAILS ON MODIFICATIONS www.strangeeng.net

## STEEL FRONT BRAKE KITS: DRAG RACE ONLY

## **APPLICATIONS - CONTINUED**

MAKE	MODEL	YEAR	0EM	PART#	TYPE	BOLT CIRCLE	PRICE	NOTES
PONTIAC								
	<b>BONNEVILLE 82-86</b>	6 DISC	3 !	B4122WC	<b>HEAVY DUTY</b>	4 3/4"	\$795	MODIFY SPINDLES *
	FIREBIRD	67-69	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		67-69	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		70-78	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
		82-92	DISC	B4118WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
		93-01	DISC	B4180WC	HEAVY DUTY	4 3/4"	\$995	TRIM CONTROL ARMS *
	GRAND PRIX	73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
		79-87	DISC	B4122WC	<b>HEAVY DUTY</b>	4 3/4"	\$795	MODIFY SPINDLES *
	LEMANS	73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
		79-81	DISC	B4122WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
	PONTIAC	77	DISC	B4114WC	<b>HEAVY DUTY</b>	4 3/4"	\$795	MODIFY SPINDLES *
	PH0ENIX	77-78	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
	TEMPEST	73-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
	VENTURA II	71-74	DRUM	B4110WC	HEAVY DUTY	4 3/4"	\$795	
		71-74	DISC	B4112WC	HEAVY DUTY	4 3/4"	\$795	
		75-77	DISC	B4114WC	HEAVY DUTY	4 3/4"	\$795	MODIFY SPINDLES *
<b>LAMB STR</b>	RUT							
				B4605WC2	LIGHTWEIGHT	SPINDLE MOUNT	\$699	FOR 1 PIECE WHEELS

To order brake kit with two piece rotors- Include "2" at the end of he part number (i.e. B4110WC2)

Add \$100 to prices shown for medium and heavy duty kits and \$150 for lightweight kits

\* SEE INSTRUCTION SHEET FOR DETAILS ON MODIFICATIONS www.strangeeng.net



## STEEL FRONT BRAKE KITS: DRAG RACE ONLY

## **APPLICATIONS - CONTINUED**

MAKE	MODEL	YEAR	0EM	PART#	TYPE	<b>BOLT CIRCLE</b>	PRICE	NOTES
SANTHU	FF STRUT							
				B4500WC	LIGHTWEIGHT	SPINDLE MOUNT	\$549	FOR 1 PIECE WHEELS
				B4100WC	HEAVY DUTY	4 3/4	\$795	
STRANG	E STRUT							
	ALUMINUM	87 - PRESE	NT	B4597WC	LIGHTWEIGHT	SPINDLE MOUNT	\$549	FOR 1 PIECE WHEELS
				B4598WC	LIGHTWEIGHT	SPINDLE MOUNT	\$549	FOR 2 PIECE WHEELS
				B4453WC	MEDIUM DUTY	4 1/2"	\$634	
				B4454WC	MEDIUM DUTY	4 3/4"	\$634	
				B4153WC	HEAVY DUTY	4 1/2"	\$795	
				B4154WC	HEAVY DUTY	4 3/4"	\$795	
	ULTRA STRUT	ALL		B4600WC	LIGHTWEIGHT	SPINDLE MOUNT	\$549	FOR ANGLIA WHEELS
	ALTERED ULTRA	ALL		B4593WC	LIGHTWEIGHT	SPINDLE MOUNT	\$549	FOR ANGLIA WHEELS

#### **ALTERED / FUNNY CAR**

	S3423 SPINDLES	ALL		B4596WC	LIGHTWEIGHT	SPINDLE MOUNT	\$549	
	STEEL SPINDLES	ALL		B4595WC	LIGHTWEIGHT	SPINDLE MOUNT	\$549	WELD-ON KIT
TOYOTA								
	SUPRA	93-02	B4182WC	HEAVY	DUTY	4 1/2" (114.3mm)	\$695	REUSES STOCK HUBS
TOYOTA								
	SUPRA	93-02	B4182WC	HEAVY	DUTY	4 1/2" (114.3mm)	\$695	REUSES STOCK HUBS

To order brake kit with two piece rotors- Include "2" at the end of he part number (i.e. B4110WC2) Add \$100 to prices shown for medium and heavy duty kits and \$150 for lightweight kits

\* SEE INSTRUCTION SHEET FOR DETAILS ON MODIFICATIONS www.strangeeng.net



## **STEEL REAR BRAKE KITS: DRAG RACE ONLY**

Brake kit part numbers listed below include soft metallic pads. Add suffix "M" for hard metallic pads. For example: B1700WCM (Choice of pads will not increase price).


Pro Series II Kits, with two-piece floating rotors, are available for all rear kits except Small Ford. For a Pro Series II kit, add "2" to the end of the part number. For example: B1700WC2 / B1700WCM2 / B1700WCD2 / B1700WCDM2. The price will increase \$100 over the price shown.


Pro Series II Stainless Kits, with two piece stainless steel rotors and billet calipers, are available for most housing ends. Add "2S" after the part number for these kits. For example: B1700WC2S / B1700WCM2S / B1700WCD2S / B1700WCDM2S. The price will increase \$400 over the price shown.


Add \$150 to any Pro Series rear brake kit for low profile caliper option.\*

Add \$80 to any Pro Series rear brake kit for billet caliper option.\*

\* Two options necessary for dual caliper brake kits







#### FORD (BIG FORD)

B1707WC Pro Series rear steel brake kit for Big Ford housing ends - F= 2.500"...\$595

B1708WC Pro Series rear steel brake kit for Big Ford housing ends - F= 2.3325"...\$595

B1708WCD Pro Series rear steel DUAL caliper brake kit for Big Ford housing ends -F= 2.3325"...\$1,020

#### **FORD** (LATE BIG FORD / TORINO)


B1706WC Pro Series rear steel brake kit For Late Big Ford housing ends - F= 2.500"...\$595


B1706WCD Pro Series rear steel DUAL caliper brake kit For Late Big Ford housing ends - F= 2.500"...\$1,020

#### **FORD MUSTANG 8.8** (86-93)


B1714WC Pro Series rear steel brake kit for OEM 8.8" Mustang housing ends using Strange axles & c-clip eliminator kit - F= 2.500"...\$595

B1714WCD Pro Series rear steel DUAL caliper brake kit for OEM 8.8" Mustang housing ends using Strange axles & c-clip eliminator kit - F= 2.500"...\$1,020









B1715WC Pro Series rear steel brake kit for Strange H1138 housing ends - F= 2.500"...\$595

B1715WCD Pro Series rear steel **DUAL** caliper brake kit for Strange H1138 housing ends - F= 2.500"...\$1,020

B1722WC Pro Series rear steel brake kit for 05-14 Mustang housing ends using Strange eliminator kit- ...\$695

**B1722WCD** Pro Series rear steel DUAL caliper brake kit for 05-14 Mustang housing ends uszing Strange eliminator kit- ...\$1,120


#### MUSTANG 8.8 3.150"(86-93) FORD MUSTANG 8.8 (05-14) FORD MUSTANG 8.8 (15-18)

B1723WC2 Pro Series II rear steel brake kit for 15-18 Mustang GT independent rear - ...\$795

**FORD** (SMALL FORD)


B1712WC Pro Series rear steel brake kit for Small Ford housing ends - F= 2.625"...\$595

## **STEEL REAR BRAKE KITS: DRAG RACE ONLY**




## GM (LARGE)

B1717WC Pro Series rear steel brake kit for OEM large GM housing ends using Strange axles & c-clip eliminator kit - F= 2.832" \$595



#### GM (SMALL)

B1716WC Pro Series rear steel brake kit for 67-77 OEM small GM housing ends using Strange axles & c-clip eliminator kit - F= 2.832"....\$595



#### **GM** (STRANGE 3.150")


B1718WC Pro Series rear steel brake kit for Strange H1143 GM housing ends - F= 2.832"...\$595


B1718WCD Pro Series rear steel
DUAL caliper brake kit for Strange
H1143 GM housing ends F= 2.832"... \$1,020


#### GM (Camaro / Corvette)

B1724WC2 Pro Series II rear steel brake kit for 10-16 Camaro & 97-13 Corvette \$795

Call for fitment information when using 15" wheels







# 5 holes on 4,700 B.C.

#### **OLDS**

B1700WC Pro Series rear steel brake kit for 57-64 Olds housing ends - F= 2.832"...\$595

B1700WCD Pro Series rear steel DUAL caliper brake kit for 57-64 Olds housing ends - F= 2.832"...\$1,020

#### MOPAR

B1704WC Pro Series rear steel brake kit for 65-73 Mopar housing ends. Includes A1022 axle bearings - F= 2.663"...\$635

B1704WCD Pro Series rear steel
DUAL caliper brake kit For 65-73
Mopar housing ends - Includes
A1022 axle bearings - F= 2.663"
\$1,020

#### MOPAR (STRANGE 3.150")

B1705WC Pro Series rear steel brake kit for Strange H1147 Mopar patterned housing ends F= 2.500"...\$595

#### STRANGE (2-PC. AXLES)


B1711NBM Pro Series rear steel brake kit for Strange L5500SBB housing ends No caliper mounts - F= 2.832"...\$545



#### **STRANGE** (1-PC DRAGSTER HSG)

B1150WC Pro Series rear steel brake kit for Strange H1150 series Dragster housing F= 2.832"...\$595


B1158WC Pro Series rear steel brake kit for Strange H1150 series Dragster housing F= 2.332"...\$595



#### **SYMMETRICAL** (3.150")

B1710WC Pro Series
rear steel brake kit
for Symmetrical housing ends - F=
2.832"...\$595

B1710WCD Pro Series rear steel DUAL caliper brake kit for Symmetrical housing ends - F= 2.832"...\$1,020



#### **SYMMETRICAL** (3.350")

B1711WC Pro Series rear steel brake kit for Strange H1136 / H1146 housing ends F= 2.832"...\$595

B1711WCD Pro Series rear steel DUAL caliper brake kit for H1136 / H1146 housing ends - F= 2.832"...\$1,020

#### TOYOTA

B1720WC Pro Series rear steel brake kit for 93-02 Toyota Supra...\$675

## **STEEL REAR BRAKE KITS: CALIPER KITS**



### **STRANGE 4-PISTON CALIPER KITS**

Strange 4-piston directional caliper provides superior strength at only 2.70 lbs. The 1.750" and 1.625" OD stainless steel pistons assure optimal pad wear.

Strange 4-piston Billet non-directional caliper further increases bridge strength providing a firmer pedal feel. All four stainless steel pistons are 1.750" and are longer which creates 7% more clamping force and provides more piston stability. Available in black or red.

Strange Low Profile billet calipers are designed with the maximum wheel clearance available. Essential when using some of the latest 15" bead lock wheels, this caliper fits where others don't. Ribs are added to increase stiffness and piston design improves retraction reducing brake drag. Each caliper uses 4 independent pads that eliminate backing plate warpage and the associated problems.

8	B1850	Directional 4 piston calipers with soft metallic	B1950	Billet black 4 piston calipers with soft metallic		
XXXX		pads & hardware- kit \$369		pads & hardware- kit \$449		
	B1855	Directional 4 piston calipers with hard metallic pads & hardware- kit \$369	B1955	Billet black 4 piston calipers with hard metallic pads & hardware- kit \$449		
S		(shown next page)	B1950-RD	Billet red 4 piston calipers with soft metallic pads hardware- kit \$449		
S	B1850LP	Billet low profile calipers with soft metallic pads				
S	XXXX	& hardware kit\$569	B1955-RD	Billet red 4 piston calipers with hard		
	B1853LP	Billet low profile calipers with high temp metallic		metallic pads & hardware- kit \$449		
		pads & hardware kit\$569	Caliper mounting bolt holes are on 5.250" center			
	B1855LP	Billet low profile calipers with hard metallic pads & hardware kit \$569	above kits			

## **STEEL REAR BRAKE KITS: CALIPER KITS**



#### **Strange 2-Piston Caliper Kit**

Manufactured from aircraft quality aluminum and machined to exacting tolerances. This caliper kit is recommended for vehicles weighing under 2,600 lbs.

B1825 2 piston calipers with soft metallic pads and mounting hardware mounting bolt holes are on 3.250" centers- kit .......\$195



## **Strange Single Piston Caliper Kit**

Employs a unique slider assembly that features internal bearings and precision ground sliders to prevent the caliper from binding and sticking, which is common with other brands. The caliper body is fully machined and lightened- satisfying the most weight conscious racer.

B1816 Single piston calipers and slider assemblies with soft metallic pads- kit ... \$255



## **STEEL REAR BRAKE KITS: COMPONENTS**



STRAN	GE REPLACEMENT ROTORS					
B2780	Lightweight 10" slotted rotor for Strange Aluminum Strut using single piston caliper with 1.50" offset rotor- RH side\$130	B2786LS Pro Series II two piece 10" slotted stainle steel rotor for Strange Ultra Strut, Anglia style spindle, and Strange Aluminum Strut using single piston caliper with 1.00" offset rotor - LH				
B2781	Lightweight 10" slotted rotor for Strange Aluminum	side				
	Strut using single piston caliper with 1.50" offset rotor- LH side\$130	B2792	11.250" slotted rotor for Pro Series rear brakes- RH\$145			
B2782	Lightweight 10" slotted rotor for Strange Ultra Strut, Anglia style spindle, and Strange Aluminum Strut using single piston caliper with 1.00" offset	B2793	11.250" slotted rotor for Pro Series rear brakes- LH\$145			
	rotor- RH side\$130	B2794R	11.250" slotted rotor for Pro Series II two piec			
B2783	Lightweight 10" slotted rotor for Strange Ultra Strut, Anglia style spindle, and Strange Aluminum		rear brakes- RH\$195			
	Strut using single piston caliper with 1.00" offset rotor- LH side\$130	B2794L	11.250" slotted rotor for Pro Series II two pied rear brakes- LH\$195			
B2786R	Pro Series II two piece 10" slotted rotor for	B2794RS	11.250" slotted stainless steel rotor for Pro Se			
$\times\!\!\times\!\!\times\!\!\times$	Strange Ultra Strut, Anglia style spindle, and Strange Aluminum Strut using single piston calipe	B2794LS	two piece rear brakes- RH\$295 11.250" slotted stainless steel rotor for Pro Se			
	with 1.00" offset rotor - RH side\$250	B2795	two piece rear brakes- LH\$295 11.250" tapered slotted rotor for MD and HD f			
B2786RS	Pro Series II two piece 10" slotted stainless steel rotor for Strange Ultra Strut, Anglia style spindle, and Strange Aluminum Strut using single piston caliper with 1.00" offset rotor - RH side\$350	B2796	brake kits- RH\$145 11.250" tapered slotted rotor for MD and HD f brake kits- LH\$145			
B2786L	Pro Series II two piece 10" slotted rotor for Strange Ultra Strut, Anglia style spindle, and Strange Aluminum Strut using single piston					

caliper with 1.00" offset rotor - LH side......\$250

th 1.00" offset rotor - LH slotted rotor for Pro Series rakes- RH .....\$145 slotted rotor for Pro Series rakes- LH .....\$145 slotted rotor for Pro Series II two piece rakes- RH .....\$195 slotted rotor for Pro Series II two piece rakes- LH .....\$195 slotted stainless steel rotor for Pro Series II ece rear brakes- RH .....\$295 slotted stainless steel rotor for Pro Series II iece rear brakes- LH .....\$295 tapered slotted rotor for MD and HD front kits- RH .....\$145 tapered slotted rotor for MD and HD front kits- LH .....\$145

#### **STEEL REAR BRAKE KITS: COMPONENTS**



B3341 for most non-Strange single piston calipers. Specify brand & pad OD.



B4010 / B4020 / B4022 Strange four piston low profile caliper



B2510 Strange single piston & two piston caliper



B3325 / B3326 Wilwood & JFZ four piston cotter pin caliper



B5010 / B5020 Strange four piston caliper

#### **CALIPERS, PADS, & REBUILD KITS**

B1260 Strange 1.750" single piston floating caliper for steel brakesslider not included... \$85

B1262 Strange 1.750" single piston floating caliper for 10" carbon brakes- slider not included...\$135

B1263 Strange 2.00" single piston floating caliper for 10" carbon brakes- slider not included... \$135

B1264 Strange 2.00" single piston floating caliper for 11" carbon brakes- slider not included... \$135

B2560 Strange 2-piston caliper 3.250" bolt centers... \$90

B5002 Strange Pro Series 4-piston directional caliper 5.250" bolt centers - RH side... \$159

B5004 Strange Pro Series 4-piston directional caliper 5.250" bolt centers - LH side... \$159

B1900 Strange Black Pro Series 4-piston
Billet caliper 5.250" bolt centers...\$199

B1900-RD Strange Red Pro Series 4-piston Billet caliper 5.250" bolt centers...\$199

B2510 Pad for Strange single and 2-piston caliper for steel rotors... \$9

B5080 Strange Low Profile 4-piston caliper 5.250" bolt centers... \$245

B5010 Pad for Strange 4-piston caliper Soft metallic... \$18 B5020 Pad for Strange 4-piston caliper Hard metallic.... \$18

B1260RK Strange single piston caliper o-ring kit various o-rings for all versions... \$5

B2607 O-ring kit for late Strange 2-piston caliper using stainless steel pistons- 96 to pres... \$5

B2605 O-ring kit for early Strange
2-piston caliper using aluminum
pistons- Pre 96... \$5

B5109 O-ring kit for Strange Pro Series 4-piston caliper Directional-1.625"/1.750" bores...\$9

B5109R O-ring kit for Strange Pro Series 4-piston caliper Directional- Low Drag conversion ... \$9

B5106 O-ring kit for Strange S-Series 4-piston caliper Non-directional-1.750" bores... \$9

B5106R O-ring kit for Strange S-Series
4-piston caliper Nondirectional- Low Drag
conversion... \$9

B5105 O-ring kit for early Strange
4-piston caliper Various o-rings for
all versions- Pre 96... \$11

Rebuild kits service one caliper Brake pads are sold as each



B4010 Pad for Strange low profile four piston caliper - Soft Metallic....\$15

B4020 Pad for Strange low profile four piston caliper - Hard Metallic.....\$15

B4022 Pad for Strange low profile four piston caliper - High Heat Metallic....\$15

B3325 Pad for Wilwood / JFZ 4-piston caliper Soft metallic- Cotter pin retention....\$20

B3326 Pad for Wilwood / JFZ 4-piston caliper Hard metallic- Cotter pin retention.....\$20

Rebuild kits service one caliper Brake pads are sold as each

Strange Billet Caliper B1900



### **FRONT CARBON BRAKE KITS**



Strange carbon brakes have become essential for all cars demanding optimum braking and maximum weight reduction. Rotating weight is decreased by over 8 lbs, and total weight by over 11 lbs compared to steel and cast iron kits.

The rotors and pads are manufactured from carbon-carbon material. This substance is carbon fiber that has been reinforced with a carbon matrix. The result is a medium that is very stable under extreme temperatures and can withstand "white hot" temperatures during braking. The rotors are virtually immune to thermal shock, which in heavy braking conditions may cause steel rotors to warp and cast iron rotors to crack and eventually shatter. Strange Carbon brakes offer several advantages when compared to steel or cast iron rotors, including the following:

- Safety and Performance
- Lightest kits on the market
- Eliminates rotor warpage & brake fade
- Immune to thermal shock

- Stopping power and efficiency is unsurpassed
- Entire 11" carbon rear brake kit is under 15 lbs
- Long rotor & pad life
- Less brake drag

#### **SPINDLE MOUNT FRONT BRAKE KIT**

This proven carbon kit features a perfected caliper kit that employs a unique slider assembly, which includes internal bearings and precision ground sliders to prevent the caliper from binding or sticking. Square carbon pads have a generous surface area allowing for optimum braking. The billet aluminum single piston front caliper utilizes a 2" diameter piston which offers additional clamping force while stabilizing the piston within the caliper bore. Coupled with the 11" front rotors, the braking ability is further enhanced. Chassis construction may need to be reinforced to handle the additional stresses imposed. Some older spindle mount wheels may not provide the proper clearances required for the 2" caliper or the 11" rotor.

2" piston calipers are for 1 piece wheels only.

American and Sanders wheels require calipers to be clearanced

### FRONT MOUNT CARBON BRAKE KITS



#### **HUB MOUNT FRONT BRAKE KIT FOR STRANGE ALUNINUM STRUTS - C4154WC**

Designed to fit 1987 to present Strange Aluminum struts, this kit provides the additional braking required for heavier vehicles while offering the weight savings of carbon. The aluminum directional four piston calipers feature stainless steel pistons and utilize titanium and stainless heat sheilds to minimize heat transfer. 11" carbon rotors are internally lugged and float on billet hat assemblies to allow for expansion and contraction. Includes 4 3/4" B.C. billet wheel hubs, hub caps, 1/2"-20 studs, Timken® bearings & races, wheel seals and all necessary mounting hardware.

#### **HUB MOUNT FRONT BRAKE KIT FOR STRANGE ULTRA STRUTS - C4700WC**

Fits Strange Ultra Struts and Penske® struts utilizing Strange bodies. Used in Pro Stock & Pro Mod applications to increase starting line holding capabilities while greatly decreasing rotational friction. The billet low profile four piston calipers are reduced in size for additional clearance and further weight reduction. Piston diameters have been reduced to 1.500" to improve pedal feel and prevent overly aggressive braking. Self retraction insulated pistons minimize brake drag and eliminate heat shields. The billet aluminum hubs have been extensively milled to reduce mass and feature an integral rotor mount to minimize fasteners that add weight and require maintenance. The hubs are 5 on 4 1/2"B.C. with 7/16" stainless steel studs and mini lightweight 12 point flanged lug nuts. Bushings are included to adapt wheels to hubs. Special wheels are required. This brake kit doesn't include bearings, races, or seals. It can accept tapered, ball, or ceramic bearings.

C4700WC is designed for Weld® 15" x 3.5" hub mount wheels with 2.25" backspace & 4 1/2" BC

C4694WC For '09+ Strange adjustable height spindles (S3423) 2" piston calipers\* with 11" rotors .......\$2,950
C4695WC For Pre '09 Strange adjustable height spindles (S3422) 2" piston calipers\* with 11" rotors ......\$2,950
C4154WC For Strange Aluminum Struts (4 3/4" BC bolt-on wheels) Four piston calipers with 11" rotors ......\$3,445
C4690WC For Strange Ultra Struts 2" piston calipers\* with 11" rotors ......\$2,950
C4700WC For Strange Ultra Struts & Penske struts (Requires special bolt-on wheels) Four piston low drag calipers & 11" rotors....\$3,995
C4696WC For Lamb struts 2" piston calipers with 11" rotors .......\$2,950
C4502WC For Santuff struts 2" piston calipers\* with 11" rotors .......\$2,950

#### **REAR CARBON BRAKE KITS**



The Strange Pro Race 11" carbon brake kit was developed to satisfy the needs of the most demanding and competitive racers. Intensive field testing and feedback from our customers has allowed us to develop a carbon system that surpasses all expectations. Strange 11" carbon has evolved beyond it's competitors and is widely used by past, present and future World Champions. The following are highlights of the Strange Pro Race Carbon kit.

(1) Ultra Caliper- This caliper offers the following improvements to the already race proven Strange directional caliper:

(A) Incorporates a unique two piece piston design, combining the exceptional thermal insulating characteristics of 303 stainless steel with the lightweight properties of aluminum. The result is substantially reduced heat transfer to the brake fluid, preventing boiling when the rotors become extremely hot. This design also eliminates heat shields which, if not periodically replaced, eventually warp causing brake drag and a spongy pedal.

(B) Stainless steel bushing to eliminate all shims and washers. Time is valuable between rounds, therefore we eliminated all spacers, washers and shims. The Ultra Caliper has a stainless steel flanged bushing that is pressed into each caliper mounting hole by Strange. The bushing guides the mounting bolt as well as provides a flat and wear-free mounting surface for the caliper mounting bolt.

(2) The least amount of rotating & static weight- The entire assembled rear 11" carbon brake kit weighs only 14.95 lbs. One 11" carbon disc weighs a meager 1.68 lbs. The same 11" carbon disc, after being assembled on an aluminum rotor hat, only weighs 3.10 lbs. An individual carbon pad weighs .20 pounds.

(3) 11" carbon rotors and carbon pads- The 11" carbon rotors are .50" smaller than other kits on the market. This generates heat more quickly than 11.50" carbon, providing optimum braking for Pro and Sportsman racers. The 11" carbon also provides the lightest rear disc weight on the market at a mere 1.68 lbs for the disc alone, and 3.10 lbs for the disc mounted to the aluminum hat. The less cumbersome rotor is more conveniently removed when making adjustments to the rear of the vehicle. Each brake pad has been slotted to allow carbon dust to escape, improving rotor and pad longevity.

(4) Aluminum carbon rotor hat- The carbon rotor hat withstands the intense heat created by the release of energy through the braking system. They are manufactured from a heat resistant aluminum and hard coated to further insulate the material. By incorporating separate aluminum retaining rings, loads from the rotor mounting bolts are evenly spread across the surface.

Strange Pro Race Rear Carbon Kits include the following: Ultra calipers, billet aluminum caliper mounts, mounting hardware, 11" carbon rotor assemblies, and slotted carbon brake pads.

For 5" BC - Replace "4" with "5" in

the part number

(I.E. C18005UC)

C180	04UC For Olds housing ends 4.75" BC- F= 2.832"	\$2,950
C180	64UC For Late Big Ford housing ends 4.75" BC- F= 2.500"	\$2,950
C180	84UC For Big Ford housing ends 4.75" BC- F= 2.332"	\$2,950
C181	04UC For Symmetrical housing ends 4.75" BC- F= 2.832"	\$2,950
C181	04DBUC For Strange H1136 housing ends 4.75" BC- F= 2.832"	\$2,950
C200	OWC Steel brake to Carbon brake conversion kit (2012+) Strange floate	er kit <b>\$2,650</b>
C120	OWC For pre 2012 Strange floater kit- 5.50" BC	. \$3,250
C120	9WC For pre 2012 Strange floater kit- 4.75" & 5" BC	\$3,250

C18104NBUC For Strange L5500SBB housing ends using Strange two piece axles- 4.75" BC- F= 2.351"- Mounts not included .........\$2,850

### **REAR CARBON BRAKE KITS**



#### **STRANGE 11.50" REAR CARBON BRAKE KITS**

Strange 11.50" kits are available for all Strange top loader Live Axle Designs - 9" / 9.50", 10.50", and 12". The 11.50" rotor is used in order to provide the largest braking surface practically possible. Funny cars and Top Fuel Dragsters have an enormous amount of energy to be released through the rotor during braking. Imagine trying to stop a vehicle traveling 330 mph with a parachute malfunction. The Strange 11.50" carbon brakes have saved several drivers involved in dangerous situations. Carbon 11.50" rotors provide a safe stop for the fastest cars in the world at a disc weight of only 1.88 lbs.

The 11.50" is standard issue on every Strange 10.50" and 12.00" Live Axle. The 11.50" carbon kit is optional on the Strange 9" / 9.50" live axle. An 11.50" carbon kit is also available for the Chrisman Live Axle. Call for more information.

C3000WC For Chrisman live axle- Includes rotors, pads & calipers Chrisman hubs must be modified .............. \$4,250

L4050WC

Carbon brake kit for 11/12 and older Strange 9" / 9 1/2" Top Load Live Axle .......\$3,595

### **CARBON REPLACEMENT COMPONENTS**

C1780	10" front carbon rotor \$795	L4050S	.024" Ti heat shield for Sportsman
C1790	11" carbon rotor- Front or rear \$795		carbon caliper \$13
L4050B	11.50" rear carbon rotor \$1,150	L4050T	.060" SS heat shield for Sportsman
B1250P	Single piston front carbon pad \$135		carbon caliper \$9
L4050H	4 piston carbon pad- Non-slotted \$163	B1260RK	O-ring kit- single piston caliper with 1.750" or 2" piston\$5
L4050H1	1 4 piston carbon pad- Slotted at 1:00 \$175	B5109	O-ring kit- 4 piston Sportsman directional
L4050H2	2 4 piston carbon pad- Slotted at 11:00 \$175		caliper \$9
B5002	4 piston Sportsman directional caliper- RH side\$1	59 B5109R	Low Drag o-ring kit- 4 piston Sportsman directional
B5004	4 piston Sportsman directional caliper- LH side \$1	59	caliper\$9
B5040	4 piston Pro Race Ultra Caliper for floater kits & 10.5' & 12" Live Axles\$385	, B5110	O-ring kit for 4 piston Pro Race Ultra Caliper \$9
B5042	4 piston Pro Race Ultra Caliper for 9.5" Live Axle & Pro Race carbon brake kits		

### **MASTER CYLINDERS, VALVES GAUGES & FITTINGS**

The Strange dual in-line master cylinder is ideal for sportsman classes requiring four wheel braking. The 1.032" bore master cylinder should be used if single piston or 2-piston calipers are used for the front and 4-piston on the rear. The 1.125" bore master cylinder will allow optimum volume and pressure for vehicles using 4-piston calipers front and rear.

#### •Strange aluminum body •Includes hard-line fittings •Economical

•Holes provided for side mount application •Both front and rear outlets are tapped 1/2-20

B3359
1.125" bore master cylinder with mounting hardware ...... \$99
B3359TA
1.125" bore master cylinder without mounting hardware....\$85
B3360
1.032" bore master cylinder with mounting hardware.....\$99
B3360TA
1.032" bore master cylinder without mounting hardware...\$85

B3359M 1979-1993 Mustang Manual Brake conversion kit. Fits automatic & manual transmission pedal boxes. Includes 1.125" bore aluminum master cylinder, billet aluminum adapter plate, push rod, dust boot, rod end, banjo fittings, and all necessary mounting hardware........ \$169



The B3370 is for professional racers who demand the best foundation for superior four wheel braking. The fast fill design allows the rear calipers to achieve exceptional caliper pressure with minimum pedal/handle travel. The body design further ensures maximum rigidity, while minimizing weight. The B3370 is self proportioned, which in most cases eliminates the use of an external proportioning valve. The external billet aluminum remote reservoir eliminates residual valves and its compact design eases mounting.



B3370R Rebuild kit for B3370 master cylinder ...... \$55

The B3362 fast fill master cylinder allows for maximum consistency and a pedal / handle feel which is unparalleled. Designed for two wheel braking applications, the lightweight body and reservoir weigh only 1 lb. The billet aluminum body features a premium grade banjo fitting for plumbing adaptability. The remote reservoir and filler cap is machined from billet aluminum that resists heat and will not easily melt like plastic. The remote feature enables the builder to eliminate external residual valves and its compact design offers freedom in mounting and plumbing.

B3362 Strange aluminum Dragster fast fill master cylinder and remote reservoir ...... \$250

B3362R Rebuild kit for B3362 master cylinder ....... \$40



The B-3369 can replace an OEM non-adjustable proportioning valve, or used in new vehicle construction. Any brake system needs to be properly proportioned to effectively stop a vehicle. Drag race applications commonly have a much greater tire contact area on the rear tire in comparison to the front. The adjustable proportioning valve is installed into the front brake line, reducing front pressure until the desired front to rear bias is achieved. Street vehicles typically install the valve into the rear brake line, allowing reduction in rear brake pressure. A brake pressure gauge, such as the P2360, should be used to check pressures front and rear before the vehicle is driven. The adjustable proportioning valve will not increase line pressure, it can only reduce. The B-3369 is threaded 1/8" NPT.

B3369 Adjustable proportioning valve ... \$49

**EXTERNAL RESIDUAL PRESSURE VALVES** are used when the master cylinder is mounted at or below the level of the calipers or when drum brakes are used. If not, a long pedal travel and poor braking can occur. The valve maintains a low pressure of fluid between the valve and the brake caliper or wheel cylinder. This keeps the pads or shoes ready to move as soon as the pedal is depressed. Drum brakes need a 10 lbs valve to keep the wheel cylinder cups expanded. Disc brake applications require a 2 lbs valve only when the master cylinder is mounted at or below the level of the calipers. External residual valves are best installed as close as possible to the master cylinder. Each valve is manufactured from billet aluminum and is tapped 1/8" NPT on both ends.

B3366 2 lbs external pressure valve ..... \$22

B3367 10 lbs external pressure valve ... \$22

The P2360 GAUGE accurately measures brake line pressure. Without proper brake pressure, even quality braking systems can be rendered significantly less effective. This gauge verifies pressure and is essential for trouble shooting brake system problems. The Strange pressure gauge makes it easier to determine appropriate changes in pedal ratio or to select the proper master cylinder bore size. Each gauge is shipped with a bleeder adapter for further convenience.

P2360 Brake pressure gauge & adapter ... \$32

#### **BRAKE FITTINGS**

P2316	3 AN x .125" NPT adapter \$2
P2318	3 AN coupling nut\$1
P2319	3 AN coupling nut sleeve \$1
P2322	3 AN x .125" NPT 90° adapter \$5
P2323	3 AN x .125" NPT 45° adapter \$8
P2332	3 AN bulkhead union\$5
P2333	3 AN bulkhead tee on branch\$15
P2334	3 AN bulkhead tee on run \$15

P2335	Nut for 3 AN bulkhead fitting \$	1
P2336	3 AN x .125" NPT tee on run \$	13

P2337 3 AN bulkhead 90° elbow ...... \$15

69 a 4000	li li	e R	
P-2300	P-2322	P-2334	P-2355
P-2316	P-2332	P-2337	9 P-2356
P-231 P-2319	P-2333	P-2336	P-2357

P2356	3 AN x 1/2-20 adapter for Strange B3360 / B3359 \$	39
P2357	3 AN x 9/16-20 master cylinder adapter\$	9
B3359	J 3AN x 1/2-20 master cylinder banjo fitting	325

B3359J

P2339 Weld-on bracket for bulkhead fitting- For round tubing .... \$3

### **BRAKE LINE & REAR BRAKE KITS**



P2338 3/16" steel brake line- 25 ft roll ... \$32 P2340 16" braided stainless flex line with 3 AN straight / 90° ends ... \$18 P2341 18" braided stainless flex line with 3 AN straight ends ............ \$21 P2342 20" braided stainless flex line with 3 AN straight ends ............ \$21 P2343 22" braided stainless flex line with 3 AN straight ends ............ \$21 P2382 Dragster 3 AN fitting & hose kit for plumbing from calipers to master cylinder- Hard line not included ............. \$92 P2383 Front door car 3 AN fitting & hose kit for plumbing from calipers to line lock- Hard line not included .......\$88



P2384 Rear door car 3 AN fitting & hose kit for plumbing from calipers to master cylinder- Hard line not included ... \$83



#### STREET AND STREET/TRACK BRAKE KITS

Brake components designed for Street / Track vehicles must be able to endure the elevated heat conditions that exist under constant use. Drum brakes are fine for many street cars, but do not offer sufficient heat dissipation for track use. In a drum brake assembly, the braking surface, shoes, and wheel cylinder are all enclosed limiting heat dissipation. A disc system has everything exposed to the surrounding air providing a more efficient braking system. When changing brakes, it is important to look at the master cylinder, pedal assembly, proportioning valve, and brake lines. What has worked well with the OEM brakes, may now be completely wrong for the new brake system.

### **BRAKE LINE & REAR BRAKE KITS**

#### **WILWOOD REAR DISC BRAKE KITS**

The Wilwood rear disc brake kits are an excellent value and ideal for street and street/track vehicles. These kits include rotors, calipers, internal parking brakes, mounting brackets, and attaching hardware. The rotors are for 5 lug wheels, and have 4 1/2", 4 3/4", and 5" bolt circles for use with 1/2" wheel studs. Rotors can have one bolt pattern modified for 5/8" studs for an additional \$15. Caliper mounting brackets fit the Late Big Ford housing end (Strange H1137). These kits are designed for a 2.50" brake offset ("F" dimension), 3.060" brake register ("A" dimension), axle flange 0D of 6.61" or less ("D" dimension), and require a 1.00" access hole on a 4.50" BC. The 11" Low Profile kit will fit some 14" wheels (minimum inside diameter of 13.14") and all 15" or larger. The 12.190" will fit some 15" wheels (minimum inside diameter of 14.2") and larger. The brake hoses and parking cables are not included.



B2708WC Wilwood 12.19" brake kit with parking brake for Late Big Ford ends - H1137 A=3.060" - F=2.500" - 4 1/2" & 4 3/4" for 1/2" studs ... \$750

B2707WC \* Wilwood 12.19" brake kit with parking brake for Late Big Ford ends - H1137 A=3.060" - F=2.500" - 4 1/2" & 4 3/4" for 1/2" studs ... \$750

B2709WC Wilwood 11" Low Profile brake kit with parking brake for Late Big Ford ends - H1137 A=3.060" - F=2.500" - 4 1/2" & 4 3/4" for 1/2" studs ... \$599

B2710WC \* Wilwood 11" Low Profile brake kit with parking brake for Late Big Ford ends - H1137 A=3.060" - F=2.500" - 4 1/2" & 4 3/4" for 1/2" studs ... \$599

\* For staggered rear shocks - One caliper mounts forward and one rearward All kits supplied with black calipers - Other colors available at an additional charge Rotors can be drilled for 5/8" studs in one bolt circle for \$15 pair



#### **DRUM BRAKE KITS**

Both 11" drum brake kits fit a brake register size of 2.780" ("A" dimension). Drums are drilled to accept 1/2" wheel studs and have 5 lug 4 1/2 & 4 3/4" bolt circles. They can be drilled for an additional bolt circle or machined to accept 5/8" studs for an additional \$15°°. The B1606 kit fits the Late Big Ford housing end, Strange H1137, with a brake offset of 2.50" ("F" dimension). The B1608 fits the Early Big Ford housing end, Strange H1135, with a brake offset of 2.332" ("F" dimension). The brake hoses and parking cables are not included.

B1606 Drum brake kit for Late Big Ford ends - H1137
A=2.780" - F=2.500" - 4 1/2" & 4 3/4" for 1/2" studs ..... \$495
B1608 Drum brake kit for Big Ford ends - H1135
A=2.780" - F=2.332" - 4 1/2" & 4 3/4" for 1/2" studs ..... \$645

#### **DRAG RACE ALUMINUM COIL-OVER SHOCKS:**

Strange Drag Race aluminum coil-over shocks were developed with the help of several chassis builders, Pro-Mod racers, and World Champion Sportsman racers. The hard work culminated into a shock that is highly responsive, consistent, and can be easily adjusted to adapt to slight changes in atmospheric conditions. Each Strange shock body, eyelets, spring seat and jam nut are fully machined from high-grade aluminum. Strange fully assembles and inspects each shock. The Strange dynamometer facility enables us to analyze shocks at all shaft speeds and continue our valve development to stay at the forefront of Drag Racing shock technology. The shocks incorporate a wide range of adjustments that suit most needs, but custom valving is always available.

#### STRANGE ALUMINUM SINGLE ADJUSTABLE:

These coil-over shocks are designed to simplify the process of tuning your suspension. When adjustments become necessary to a drag race vehicle, Strange shocks prove to be a valuable tool to alter the reaction of the suspension to compensate for the change in conditions. Shock extension is easily adjusted by turning a conveniently located external knob. The external knob offers 10 precise extension (rebound) settings and allows for a wide range of adjustment.

#### STRANGE ALUMINUM DOUBLE ADJUSTABLE:

Double adjustable coil-over shocks are offered to drag racers requiring more control of the suspension system. The double adjustable shock offers all the benefits of the single adjustable shock, but also incorporates an additional knob for accurately adjusting compression (bump). The ability to independently adjust both extension and compression allows the chassis tuner complete dampening control of the vehicle's suspension.

Strange double adjustable shock package include Teflon lined high mis-alignment bearings, spring seat bearings and Hyperco Springs. Hyperco springs are supplied to ensure consistent performance and alleviate additional problems that may be introduced with lesser grade springs.



### KONI ALUMINUM DOUBLE ADJUSTABLE: Koni

coil-over shock absorbers feature SPA 1 valving. SPA 1 valving is velocity sensitive, which allows for hard launches and allows proper "unwinding" of the rear suspension. They are produced from quality materials and surfaces are machined to close tolerances. Extension (rebound) is adjusted through a slot under the top eye, while compression (bump) is adjusted above the bottom eye. Every Koni shock is 100% dyno tested to assure optimum performance.

### **COIL-OVER, STRANGE ALUMINUM, KONI ALUMINUM**

		Callanaad			1	
Part Number	Extended Length	Collapsed Length without Bumper	Recommended Ride Height	*Stroke	Suggested Spring Length	Adjustment Type
S5209	22.40"	14.25"	17"-20"	8.15"	14"-16"	Strange Single
S5009	22.40"	14.25"	17"-20"	8.15"	14"-16"	Strange Double
S5208	20.53"	13.32"	15"-19"	7.20"	14"-16"	Strange Single
S5008	20.53"	13.32"	15"-19"	7.20"	14"-16"	Strange Double
S5207	19.15"	12.64"	15.25"-16.00"	6.52"	14"	Strange Single
S5007	19.15"	12.64"	15.25"-16.00"	6.52"	14"	Strange Double
S5206	17.15"	11.64"	13.875"-14.50"	5.52"	12"	Strange Single
S5006	17.15"	11.64"	13.875"-14.50"	5.52"	12"	Strange Double
S5205	15.40"	10.76"	12.625"-13.250"	4.64"	12"	Strange Single
S5005	15.40"	10.76"	12.625"-13.250"	4.64"	12"	Strange Double
S5204	13.84"	10.00"	11.750"-12.125"	3.86"	10"	Strange Single
S5004	13.84"	10.00"	11.750"-12.125"	3.86"	10"	Strange Double
S5203	12.84"	9.50"	11.00"-11.375"	3.36"	7"-8"	Strange Single
S5003	12.84"	9.50"	11.00"-11.375"	3.36"	7"-8"	Strange Double
S5202	11.36"	8.74"	10.00"-10.375"	2.62"	7"-8"	Strange Single
S5002	11.36"	8.74"	10.00"-10.375"	2.62"	7"-8"	Strange Double
S1123A	19.5"	12.5"	16.625"-17.38"	7"	14"	Koni Double
S1126A	17.5″	11.5″	15.25"-15.875"	6"	12"	Koni Double

<sup>\*</sup> Stroke is stated without the bump rubber installed to comply with the industry standard and be comparable to other brands. Deduct .563" from Strange shock stroke and 2.1875" from the Koni to obtain usable stroke. Shocks should not be operated without the bump rubber.

KONI DOUBLE ADJUSTABLE SHOCK: Includes .625" wide bearings, spring seat, and jam nut ............ \$450 each

**STRANGE DOUBLE ADJUSTABLE SHOCK PACKAGE:** Includes 1" wide\* Teflon lined high mis-alignment bearings, spring seats, jam nuts, Hyperco springs, and spring seat bearing kit ......... \$680 package

STRANGE SINGLE ADJUSTABLE SHOCK: Includes 1" wide\* high mis-alignment bearings, spring seat, and jam nut ... \$179 each

Part numbers for Strange Single Adjustable Shocks are for one shock. Part numbers for Strange Double Adjustable are for Shock Package (specify spring rate).

For Strange Double Adjustable shock sold individually (less spring and spring seat bearings) add "A" to the end of the part number (i.e. S5007A - \$302 each).

S1409 Torrington spring seat bearing kit eases spring height adjustment ... \$38 S1413 Spanner wrench for coil-over shocks ... \$









**IN-LINE** 

#### **STRANGE ULTRA SERIES DOUBLE ADJUSTABLE SHOCK**

Strange Engineering brings advanced shock technology into the Drag Racing market. As racers become more knowledgeable in chassis tuning, many are seeking qualities normally reserved for tier one vehicles used in other forms of motorsports. These double adjustable shocks address the internal events that normally occur during use, drastically reducing undesired changes in shock dampening. Monotube construction is lighter (and less unsprung weight) than a twin tube design, and dissipates heat more efficiently. The shock features a hollow shock rod, which has less inertia making it more responsive to changes in direction; In addition, the shaft is optimally hardened for increased strength, chromed, and super finished to provide superior life and reduce both deflection and friction. The ultra low friction guide and seal are self-aligning, which reduces low speed abrasion and wear that occurs during side loading and temperature changes. The large 48mm piston is manufactured from billet aluminum, hard anodized, and Teflon® coated. The larger piston area achieves higher dampening forces with lower internal pressures. A thin Teflon® coated piston band further reduces friction while allowing a straighter port design that minimizes changes in fluid direction. The result is faster frequency response and lowered hysteresis, which permits a more progressive dampening force without the downside of additional lag that would normally accompany it. The extension and compression oil paths are completely sealed from each other eliminating any cross talk between them.

The strange ultra monotube shocks are available in common configurations (listed below) and are revalvable. Custom configurations and valving are available upon request (additional cost may apply). The ultra shock is a key component in the suspension system that will deliver consistency, improved launch, down track stability and ultimately allow you to better tune your vehicle for superior performance. All shocks are hand assembled by Strange in the USA.

Shorter Oil Path Provides Quicker Response to Compression Forces / Compact Design

					<u> </u>
Part Number	Extended Length	Collapsed Length without Bumper	Recommended Ride Height	*Stroke	Suggested Spring Length
S7210I	25.68"	16.30"	18.50"-22.50"	9.38"	14"-16"
S7209I	23.45"	15.20"	17.50"-20.50"	8.25"	14"
S7207I	19.59"	13.26"	15.25"-16.50"	6.33"	12"

072101	20.00	10.00	10.30 22.30	3.50	17 10
S7209I	23.45"	15.20"	17.50"-20.50"	8.25"	14"
S7207I	19.59"	13.26"	15.25"-16.50"	6.33"	12"
S7205I	16.69"	11.81"	13.25"-14.25"	4.88"	10"
S7204I	15.30"	11.14"	12.50"-13.50"	4.16"	8"
S7203I	13.79"	10.36"	11.50"-12.25"	3.43"	7"

PIGGYBACK Shorter Length to Stroke / Accepts Longer Spring / Easily Convertsto Air Adjustable

Part Number	Extended Length	Collapsed Length without Bumper	Recommended Ride Height	*Stroke	Suggested Spring Length
S7210S	25.15"	15.80"	18"-22"	9.35"	14"-16"
S7209S	22.95"	14.70"	17"-20"	8.25"	14"-16"
S7207S	19.00"	12.80"	14.75"-16.00"	6.20"	12"-14"
S7205S	16.28"	11.28″	12.75"-13.75"	5.00"	10"-12"
S7204S	14.94"	10.64"	12"-13"	4.30"	8"-10"
S7203S	13.38"	9.85"	11"-11.75"	3.53"	7"- 8"

<sup>\*</sup> Stroke is stated without the bump rubber installed to comply with industry standards and be comparable to other brands. Shocks should not be operated without the bump rubber / Contact Strange Engineering for available bumper lengths

#### INTEGRAL (PIGGYBACK) RESERVOIR



**IN-LINE RESERVOIR** 

#### MONOTUBE CONSTRUCTION

- Lighter weight / High heat dissipation
- Can be operated inverted- Reduces unsprung weight and provides consistent chassis reaction

#### GAS CHARGED INTEGRAL RESERVOIR

- Floating piston compensates for oil displaced by piston rod as shock is compressed

#### WIDE RANGE OF TUNING ADJUSTMENT

- 24 clicks for both compression & rebound
- Clicks are Independent and positively lock
- Allows for fine tuning for varying conditions
- Adjustments are made with a standard 5/32" Allen wrench

#### ULTRA LOW FRICTION GUIDE AND SEAL

- Reduces wear during side loading and temperature variations, which maximizes performance consistency

#### HOLLOW INDUCTION HARDENED SUPER FINISHED CHROME ROD

- Lowers inertia, while minimizing deflection and friction

#### 48MM HARDENED PISTON WITH TEFLON® COATING

- Provides precise low speed control while maintaining consistency
- Large working pressure area allows for higher dampening forces
- Straighter port design improves oil flow for a quicker response time
- Hysteresis is minimized resulting in improved grip and stability
- Improved stability and traction at launch and down track

#### PISTON BASED VALVING SYSTEM

- Isolates compression and extension adjustments from affecting each other
- Decreases blow off force requirements / Improves frequency response
- Superior low speed control
- Allows for improved launch control and reduced tire shake

#### LOCKING ANODIZED SPRING SEAT

 Spring seat and body threads have dissimilar coating for corrosion & galling resistance

#### • INTEGRAL (PIGGYBACK) RESERVOIR (pictured left)

- Can be converted to air adjustable
- Compression adjustment is located in-line with oil flow
   (working pressure column) reducing oil shear, hysteresis and improving small amplitude frequency response- compared to designs that are adjustable at the expire.

#### canister

**Extension Adjustment** 

- Allows for easier spring installation over a wide range of shock lengths
- Enables use of a  $\,$  longer and lighter spring for improved stored energy  $\,$

#### **ULTRA SERIES MONOTUBE DOUBLE ADJUSTABLE SHOCK**

In-line Shock... \$495 each

Integral (Piggyback) Reservoir Shock... \$645 each Spring and spring seat bearing kit available separately



Compression Adjustment

### STREET/TRACK ALUMINUM BOLT-IN

### STREET/TRACK ALUMINUM BOLT-IN SHOCKS

Strange aluminum bolt-in shocks were developed with the help of several Sportsman racers, street / track competitors, and muscle car enthusiasts. This collaboration lead to the creation of a shock that is very responsive, consistent, and can be easily tailored to various conditions. The Strange shock body and eyelets are fully machined from high-grade aluminum, carefully assembled, and fully inspected. In-house dynamometer testing enables us to completely analyze shocks at all shaft speeds. This allows us to continue our valve development and stay ahead of the performance shock industry. Although Strange shocks offer a wide range of adjustment, re-valving is available to suit your specific requirements.

- · Lightweight Aluminum Bolt-In Shocks
- Easily Accessible External Adjustment
- Extension Tuning Knob Single & Double Adjustable
- · Compression Tuning Knob Double Adjustable
- Billet Steel Cross Bars & Polyurethane Bushings
- Wide Range of Adjustments are Ideal for Street & Track

## STRANGE ALUMINUM BOLT-IN SINGLE ADJUSTABLE

Shocks give the customer ability to control the dampening effect of the shocks extension resistance. Whether you are adjusting the ride of your street machine, handling of a Pro Touring, or tuning a drag race vehicle, Strange shocks are a valuable tool to alter the response of yoursuspensiontovarious conditions you may encounter. Shock extension (rebound) is easily adjusted by turning a conveniently located external knob. The external knob offers 10 precise settings and allows for a wide range of adjustment.

## STRANGE ALUMINUM BOLT-IN DOUBLE ADJUSTABLE:

Shocks are offered to those seeking the ultimate in suspension tuning. The double adjustable shock offers all the benefits of the single adjustable shock, but also incorporates an additional knob for accurately adjusting compression (bump). The ability to independently adjust both extension and compression allows the chassis tuner complete dampening control of the vehicles suspension.



Single Adjustable.... \$160 each Unless Stated Otherwise Double Adjustable... \$260 each

		Front					F			
AMC	Year	Single	Coil-Over	Double	Coil-Over	Single	Coil-Over	Double	Coil-Over	
Ambassador / Matador	1952-55					S5270		S5070		
	1956-78					S5272		S5072		
AMX / Javelin	1968-74					S5272		S5072		
Hornet / Gremlin	1977					S5270		S5070		
Pacer	1975-80							S5046		
Rambler / Rebel	1956-78					S5272		S5072		
BUICK										
Apollo	1973-75	S5263		S5063		S5274				
Centurion	1971-73	S5267		S5067		S5264	S5280LS	S5064	S5080LS	
Century	1973-81	S5263		S5063		S5264	S5280LS	S5064	S5080LS	
Electra	1971-84					S5264	S5280LS	S5064	S5080LS	
Grand National	1982-87	S5263		S5063		S5264	S5280LS	S5064	S5080LS	
Lesabre	1971-85					S5264	S5280LS	S5064	S5080LS	
Regal	1973-87	S5263		S5063		S5264	S5280LS	S5064	S5080LS	
Riviera	1971-78	S5267		S5067		S5264	S5280LS	S5064	S5080LS	
Skylark	1964-67	S5267		S5067		S5264	S5280LS	S5064	S5080LS	Except Sport Wagon
	1964-69	S5267		S5067		S5272		S5072		Sport Wagon
	1968-72	S5263		S5063		S5264	S5280LS	S5064	S5080LS	Except Sport Wagon
	1975-79	S5263		S5063		S5274				
Special	1964-67	S5267		S5067		S5264	S5280LS	S5064	S5080LS	Except Estate Wagon
	1964-69	S5267		S5067		S5272		S5072		Estate Wagon
	1968-72			S5063		S5264	S5280LS	S5064	S5080LS	Except Estate Wagon
CHEVROLET										
Bel Air	1971-75	S5267		S5067		S5264		S5064		
DOI AII	1976-81	03207		03007		S5264		S5064		
Biscayne	1971-72	S5267		S5067		S5264		S5064		
	1973-75					S5264		S5064		
Camaro	1967	S5263		S5063		S5276		S5076		Non-Staggered Shocks
	1967-69	S5263		S5063		S5262		S5062		Mono leaf
	1968-69	S5263		S5063		S5270		S5070		Multi leaf
	1970-81	S5267		S5067		S5268		S5068		
	1982-92					S5270	S5284	S5070	S5084	Front - Drag Race Only
	1993-02		S5269		S5069	S5270	S5284	S5070	S5084	
	1993-02		S5271		S5071	S5270	S5284	S5070	S5084	Front - Drag Race Only
	2010-15				S2063				S5090	Front - Drag Race Only
Caprice	1971-96	S5267		S5067		S5264	S5280LS/RS	S5064	S5080LS/RS	

Single Adjustable.... \$160 each

Unless Stated Otherwise

		Front				R	ear			
CHEVROLET	Year	Single	Coil-Over	Double	Coil-Over	Single	Coil-Over	Double	Coil-Over	
Chevelle / Malibu	1964-67	S5267		S5067		S5264	S5280LS/RS	S5064	S5080LS/RS	
	1968-83	S5263		S5063		S5264	S5280LS/RS	S5064	S5080LS/RS	
Chevette	1976-87	5,0205		0.000		S5270	0020020,110	S5070	0000020,0	
Chevrolet	1955-57	S5267		S5067		S5272		S5072		
Chevy II / Nova	1962-67	00201		00001		S5270		S5070		
	1968-79	S5263		S5063		S5274				
Corvette	1953-62					S5270		S5070		
C5 / C6	1997-13		S5221		S5021				S5022	
El Camino	1964-67	S5267		S5067						
	1968-87	S5263		S5063		S5264	S5280LS/RS	S5064	S5080LS/RS	
Impala	1971-85	S5267		S5067		S5264	S5280LS/RS	S5064	S5080LS/RS	
Monte Carlo	1970-88	S5263			S5065	S5264	S5280LS/RS	S5064	S5080LS/RS	
CHEVY TRUCK										
Blazer - Full Size	1969-72			S5095		S5298		S5098		2 WD
	1973-83			S5095				S5096		2 WD
	1973-91							S5096		4 WD
Advanced Design	1950-55					S5272		S5072		
C10	1963-66			S5095						2 WD
	1967-72			S5095		S5298		S5098		2 WD
	1973-86			S5095				S5096		2 WD
Suburban	1963-72			S5095				S5096		2 WD
	1973-91			S5095	S5061	S5264	S5280LS	S5064	S5080LS	2 WD
S10 / S10 Blazer	1982-93	S5263		S5063						2 WD
GM TRUCK										
Sierra	1963-66			S5095		S5260		S5060		2 WD
	1967-72			S5095		S5260		S5060		2 WD - Leaf Spring Rea
	1967-72			S5095		S5298		S5098		2 WD - Coil Spring Rear
	1973-87			S5095				S5096		2 WD
	1973-91							S5096		4 WD
Jimmy - Full Size	1969-72			S5095				S5098		2 WD
	1973-83			S5095				S5096		2 WD
	1973-91							S5096		4 WD
New Design	1950-54					S5272		S5072		
Caballero / Sprint	1971-77	S5263		S5063						
S15 / S15 Jimmy	1982-93			S5063				S5062		Mono leaf
Sonoma	1991-93	S5263		S5063				S5070		Multi leaf
OLDSMOBILE										
F85 / Cutlass / 442	1964-67	S5267		S5067		S5272		S5072		
	1968-72			S5063		S5272		S5072		
Cutloon / Cupromo / 440						GOLTE		30072		
Cutlass / Supreme / 442	1976-87			S5063						
Omega / 442	1973-79	S5263		S5063		S5274				

Single Adjustable.... \$160 each

Unless Stated Otherwise

			Fro	ont			Ro	ear		
PONTIAC	Year	Single	Coil-Over	Double	Coil-Over	Single	Coil-Over	Double	Coil-Over	
Bonneville	1971-81	S5267		S5067		S5264	S5280LS/RS	S5064	S5080LS/RS	
	1982-86	S5263		S5063		S5264	S5280LS/RS	S5064	S5080LS/RS	
Catalina	1971-81	S5267		S5067		S5264	S5280LS/RS	S5064	S5080LS/RS	
Firebird / Trans Am	1967	S5263		S5063		S5276		S5076		Non-Staggered Shocks
	1968-69	S5263		S5063		S5262		S5062		Mono Leaf
	1968-69	S5263		S5063		S5270		S5070		Multi Leaf
	1970-81	S5267		S5067		S5268		S5068		
	1982-92					S5270	S5284	S5070	S5084	Front - Drag Race Only
	1993-02		S5269		S5069	S5270	S5284	S5070	S5084	· · · · · · · · · · · · · · · · · · ·
	1993-02		S5271		S5071	S5270	S5284	S5070	S5084	Front - Drag Race Only
Grand Am	1973-75	S5267	00271	S5067	00071	S5264	S5280LS/RS	S5064	S5080LS/RS	Jug nass s,
orana Am	1978-80			S5067		S5264	S5280LS/RS	S5064	S5080LS/RS	
Grand Prix	1962	S5267		S5067		33204	03200L0/110	33004	03000L0/110	
Grand Frix	1963-64	S5267		S5067		S5264	S5280LS/RS	S5064	S5080LS/RS	
	1965-68	S5267		S5067		33204	30200L3/N3	33004	33000L3/N3	
	1969-87					S5264	S5280LS/RS	S5064	S5080LS/RS	
GTO	1964-67	S5263 S5267		S5063		S5264				
610				S5067		S5264 S5264	S5280LS/RS	S5064	S5080LS/RS	
	1968-73 1974	S5263 S5263		S5063 S5063		S5274	S5280LS/RS	S5064	S5080LS/RS	
Lemans / Tempest	1964-67	S5267		S5067		S5274 S5264	S5280LS/RS	S5064	S5080LS/RS	
Lemans / Tempest	1968-79	S5267		S5067		S5264	S5280LS/RS	S5064	S5080LS/RS	
	1980-81	S5263		S5063		33204	33200L3/113	33004	33000L3/113	
	1982-83	33203		33003		S5264	S5280LS/RS	S5064	S5080LS/RS	
Phoenix	1977-79	S5263		S5063		S5274	03200L0/110	33004	03000L0/110	
Ventura II	1971-77			S5063		S5274				
DODGE	10/11/1	00200		00000		00271				
Challenger	1970-74	S5281	1	S5081		S5282		S5082		
onanongo.	2008-10	00201		S5085		00202		00002		Drag Race Only
Charger / Coronet	1965-72	S5281		S5081		S5282		S5082		,
	1973-76			S5083		S5282		S5082		
	1977-78			S5083						
Dart / Swinger/ Demon	1962	S5281		S5081		S5282		S5082		
	1963-76			S5081						
Magnum	1978-79	S5283		S5083						
Monaco	1974-76					S5282		S5082		
	1977-78	S5283		S5083						
Lancer	1961-62			S5081						
Polara	1971-73					S5282		S5082		
St. Regis	1979-81	S5283		S5083						
DODGE TRUCK										
Pick-up Truck- D50	1982-91	S5267		S5067						4 Wheel Drive
Raider	1987-89			S5067						

Single Adjustable.... \$160 each

Unless Stated Otherwise

			Fro	nt		Rear				
PLYMOUTH	Year	Single	Coil-Over	Double	Coil-Over	Single	Coil-Over	Double	Coil-Over	
Barracuda	1964-69	S5281		S5081						
	1970-74	S5281		S5081		S5282		S5082		
Belvedere / Satellite	1962-72	S5281		S5081		S5282		S5082		
201104010, 041011110	1973-74	S5283		S5083		S5282		S5082		
Duster / Valiant / Scamp	1960-76	S5281		S5081		S5270		S5082		
Fury	1971-74					S5282		S5082		
/	1975-78	S5283		S5083		S5282		S5082		
Road Runner	1968-72	S5281		S5081		S5282		S5082		
	1973-75	S5283		S5083		S5282		S5082		
FORD	1070 70	00200		00000		00202		30002		
	1000 01	05007		05007						
Crown Victoria	1983-91	S5267		S5067		05070		05070		
Custom / Custom 500	1971-82					S5272		S5072		
Fairlane	1962-65							S5046		F Ct
	1966-70					05070		S5046		Except Station Wagon
F	1966-70				00044*	S5270		S5070		Station Wagon Steel Strut
Fairmont	1978-83				S2041*			S5044		Steel Strut
Falcon	1960-65							S5046		Except Station Wagon
	1966-70					05070		S5046		
0.1	1966-70					S5270		S5070		Station Wagon
Galaxy 500	1971-78	05007		05007		S5272		S5072		
Connedo	1979-82	S5267		S5067	C2041*	S5272		S5072		Steel Strut
Granada	1981-82	05007		05007	S2041*	05070		S5044		Steel Strut
LTD / LTD II	1971-82 1983-86	S5267		S5067	S2041*	S5272		S5072 S5044		Ctool Ctwit
Maverick	1969-77			CEOAE	S2041"			55044		Steel Strut
	1964-73			S5045 S5045				S5046		
Mustang (Aluminum)	1974-78			S5045 S5047				S5046		Mustang II
	1974-78	S5281		S5047 S5081			S5248	S5044	S5048	iviustally II
	1994-04	33201		33001			S5248	S5050	S5048	Includes GT & Cobra
	2005-14					S5242	30240	S5030	330 <del>4</del> 0	iliciuues of & confa
	2005-14					30242		S5052		
Mustang (Steel)	1979-86					S6000EM		30002		
iviusially (steel)	1987-93	S6001EM			S2041*	S6000EM				Struts Fit 8 Cyl Only
	1994-04	S6005LM			S2041*	S6004LM				Includes GT & Cobra
	1334-04	S6003EW			S2041*	S6000EM				Lowered
	2005-10	S6009LM			S2041*	S6008LM				
	2003-10	S6011LM			S2043*	S6008LM				
	2015-20	SOUTHERN			S2045*	SOCOCIVI				
Coil-Over Sleeve Kit	1987-04	S6001								(2) Require
Double Adjustable Kit	1987-14	30001			S2000FM*					D/A Struts, Springs, Pits
Pinto	1971-80			S5047	OLUGOI IVI					, so troy opinigo, i ita
Ranchero	1959	S5267		S5067						
	1960	S5267		S5067				S5046		

Single Adjustable.... \$160 each

Unless Stated Otherwise

Property   Property			Front					Re			
Ranchero (continued)         1916-15         I         I         I         I         S270         S5070         I	FORD	Year	Single	Coil-Over	Double	Coil-Over	Single	Coil-Over	Double	Coil-Over	
Thunderbird		1961-65							S5046		
Trunderbird 199-68		1966-71					S5270		S5070		
1961-86   1965		1972-79	S5267		S5067		S5270		S5070		
1967-11   1967	Thunderbird	1959-60	S5267		S5067						
1971   1972   1978   1978   1979		1961-63							S5046		
1972   55.67   S5067   S5070   S5070		1965-66					S5272		S5070		
1973-76   1973		1967-71	S5267		S5067		S5272		S5072		
1977-79   1978-79   1979		1972	S5267		S5067		S5270		S5070		
Torino		1973-76	S5267		S5067						
Torino         1968-71         S267         S2067         S2067         S2070         S2070         S2070         CANDITUCK           FORD TRUCK           FORD TRUCK           SE270         SS070         SS070         SS270         SS270         SS070         SS270         SS070         SS270         SS070         CANDITUCK           F100 / F250         1966-60         1966-60         SC070         SC550         SS270         SS280         SS070         CANDITUCK           F100 / F250         1966-60         SC255         SS055         SS055         SS280         SS060         CANDITUCK           F150 / 1970-70         SS255         SS055         SS055         SS280         SS068         CANDITUCK           F150 / 1970-70         SS256         SS070         SS055         SS280         SS068         CANDITUCK           MERCUTY           B00cat         1975-80         SC01         SS047         SC01         SS044         SS044         SS045         SS050         SS050         SS046         SS04		1977-79	S5267		S5067		S5270		S5070		
FORD TRUCK           Bronco         1980-96         SS270         SS271         SS270         SS270<		1987-88				S2041*					
Part	Torino	1968-71							S5046		
Bronco		1972-76	S5267		S5067		S5270		S5070		
F100 / F250         195-60         144         144         144         55270         55270         55070         144         144         145         144         145         55280         55280         55060         147         144         144         145         145         145         145         144         144         144         145         144 </td <td>FORD TRUCK</td> <td></td>	FORD TRUCK										
F100 / F250         195-60         144         144         144         55270         55270         55070         144         144         145         144         145         55280         55280         55060         147         144         144         145         145         145         145         144         144         144         145         144 </td <td></td> <td>1980-96</td> <td>S5270</td> <td></td> <td>S5070</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>		1980-96	S5270		S5070						
Page	F100 / F250	1956-60					S5270		S5070		
F150	F100	1961-64					S5260		S5060		
F150         1980-96         S5270         S5070         Image: Color of the		1965-69	S5255		S5055		S5258		S5058		
MERCURY           Bobcat         1975-80         S5047         S2041*         S5044         Steel Strut           Capri         1999-86         S2041*         S5046         Steel Strut           Comet         1960-69         S5045         S5045         S5046         S5046           Cougar         1967-70         S5045         S5045         S5046         S5046         S5046           1971-73         S5267         S5067         S5046         S5046         S5046         S5046           1971-73         S5267         S5067         S5046         S5046         S5046         S5046           1971-73         S5267         S5067         S5041*         S5046         S5046         S5046           1971-73         S5267         S5067         S2041*         S5046         S5048         S5048           1981-82         S5067         S5041*         S5046         S5048         S5048         S5048           Cyclone         1968-71         S5067         S5067         S5072         S5072         S5072         S5072           Grand Marquis         1971-82         S5267         S5067         S5272         S5046         S5046         S5048         S		1970-79	S5255		S5055		S5256		S5056		
Bobcat         1975-80         S5047         S2041*         S5044         S5044         Steel Strut           Capri         1979-86         S         S         S2041*         S5046         S5046         Steel Strut           Comet         1960-69         S         S5045         S         S5046         S5046         S5046           Cougar         1967-70         S         S5045         S         S         S5046         S         S5046           1971-73         S         S5045         S         S         S5046         S         S5046         S         S         S         S5046         S         S         S5047         S         S5046         S         S         S5046         S         S         S5047         S         S5046         S         S5048         S         S5048         S         S5048         S         S5048         S         S5046         S         S5047         S         S5072         S5072         S5044         S         S5041         S         S5044         S         S5048	F150	1980-96	S5270		S5070						With Quad Suspension
Bobcat         1975-80         S5047         S2041*         S5044         S5044         Steel Strut           Capri         1979-86         S         S         S2041*         S5046         S5046         Steel Strut           Comet         1960-69         S         S5045         S         S5046         S5046         S5046           Cougar         1967-70         S         S5045         S         S         S5046         S         S5046           1971-73         S         S5045         S         S         S5046         S         S5046         S         S         S         S5046         S         S         S5047         S         S5046         S         S         S5046         S         S         S5047         S         S5046         S         S5048         S         S5048         S         S5048         S         S5048         S         S5046         S         S5047         S         S5072         S5072         S5044         S         S5041         S         S5044         S         S5048	MERCURY										
Capri         1979-86         Image: Comet         1960-89         Image: Comet         1960-89         Image: Comet         1900-89         Image: Comet         1900-89         Image: Comet         1900-89         Image: Comet         1900-89         Image: Comet         1900-80         Image: Comet         1900-80         Image: Comet         1900-80         Image: Comet         1900-80         1900-80         1900-80         Image: Comet         1900-80		1975-80			S5047						
Comet         1960-68         Image: Comet of the component of the					55511	S2041*			S5044		Steel Strut
Cougar         1967-70         Cougar         55045         Cougar         S5046         Cougar         1967-70         Cougar         55045         Cougar         S5046         Cougar         1971-73         Cougar         S5047         Cougar         S5048         Cougar         Cougar         S5048         Cougar         S5048         Cougar         Cougar         S5048         Cougar         Cougar         S5048         Cougar						02011					
Cougar         1967-70         Cougar         S5045         Cougar         S5046         Cougar         Cougar         1971-73         Cougar         Cougar         S5046         Cougar         Cougar         S5046         Cougar         Cougar         S5046         Cougar         Cougar         S5047         Cougar         Cougar         Cougar         S5047         Cougar	Comer				S5045				566.6		
1971-73   S5267   S5067   S5	Cougar								\$5046		
1914-79   S5267   S5067   S5067   S   S   S   S   S   S   S   S   S	Oodgai				20010						
The color of the			S5267		S5067				000.0		
Cyclone         1983-88         Image: Cyclone of the c						S2041*					Steel Strut
Cyclone         1968-71         Image: Cyclone of the c											
S5267   S5067   S506	Cyclone								S5046		
Grand Marquis         1983-91         S5267         S5067         S5272         S5072         S5072         S5084         Steel Strut           Marquis         1983-86         S5267         S5067         S5044         S5044         Steel Strut           Meteor         1962-63         S5046         S5046         S5046         S5046           Montego         1968-71         S5267         S5067         S5067         S5272         S5046         S5046           Monterey         1971-74         S5267         S5067         S5272         S5072         S5072         S5044           HONDA           CRX         1989-91         S5016         S5015         S5016         S5016			S5267		S50 <u>6</u> 7						
Marquis       1971-82       S5267       S5067       S5272       S5072       S5072       Steel Strut         Meteor       1962-63       S5044       S5044       S5046       S5046 <td>Grand Marquis</td> <td></td>	Grand Marquis										
Meteor         1983-86         Image: Control of the co							S5272		S5072		
Meteor         1962-63         Image: Control of the co						S2041*					Steel Strut
Montego         1968-71         Image: Control of the c	Meteor										
Monterey   1972-76   S5267   S5067   S5067   S5072   S5072   S5072   S5072   S5074	Montego								S5046		
Zephyr         1978-83         S2041*         S5044           HONDA           CRX         1989-91         S5015         S5016			S5267		S5067						
Zephyr         1978-83         S2041*         S5044           HONDA           CRX         1989-91         S5015         S5016	Monterey	1971-74					S5272		S5072		
HONDA           CRX         1989-91         S5015         S5016		1978-83				S2041*			S5044		
CRX 1989-91 S5015 S5016											
		1989-91				S5015				S5016	
CIVIC	Civic	1000 01				S5015				S5016	

# MUSTANG SINGLE ADJUSTABLE STEEL BOLT-IN SHOCKS / STRUTS

- 11 performance settings offer a wide range of adjustment
- Easily accessible external knob controls extension (rebound)
- fits OEM applications
- Ideal for Street/Strip applications
- Steel construction
- · Accepts most coil-over kits

#### **79-93 MUSTANG** S6000EM

Strange externally adjustable Rear Shock...... \$80 ea.

#### **87-93 MUSTANG** S6001EM

Strange externalaly adjustable Front Strut - V8 Only...... \$129 ea.

### **94-04 MUSTANG** S6004LM

Strange externally adjustable Rear Shock- Not for IRS Cobra... \$80 ea.

#### **94-04 MUSTANG** S6005LM

Strange externally adjustable Front Strut ...... \$129 ea.

#### **05-14 MUSTANG** S6008LM

#### **05-10 MUSTANG** S6009LM

#### **11-14 MUSTANG** S6011LM

#### **COIL-OVER KIT FOR 79-04 MUSTANG STRUT** S6001

Includes aluminum body, spring seat, jam nut & bearings

Aftermarket caster / camber plates must be used with Strange Coil-Over kit Requires 14" spring - Sold serparately

See Spring Section for available 14" springs

•Hyperco \$130/pair



#### **MUSTANG & CAMARO / FIREBIRD DOUBLE ADJUSTABLE COIL-OVER STRUTS**

- Easily accessible and independently adjustable extension and compression settings
- · Lightweight construction with durable steel body
- Robust 22mm rod and large 1.375" piston diameter
- · Coil-over body is designed to fit 2.5" ID springs
- · Includes spring seat bearings for easy ride height adjustment
- · Custom valving available

#### STRANGE BOLT-IN DOUBLE ADJUSTABLE COIL-OVER STRUTS

Competitive Drag Racing is won or lost by narrow margins making suspension tuning and consistency critical to winning races. Strange double adjustable coil-over struts easily permit independent control of both extension and compression, maximizing your car's performance. Besides reducing weight and allowing for adjustable ride height, the double adjustable Strange struts are a valuable tool to adapt to changing track conditions, control weight transfer, ET reduction, improve down track stability, and allow for consistent use.

#### **1987-93 (V8 ONLY) AND 94-04 MUSTANG\*** \$2041

Double adjustable steel coil-over strut - Drag Racing only......\$499 ea.

#### **2005-14 MUSTANG\*\*** \$2043

Double adjustable steel coil-over strut - Drag Racing only.....\$499 ea.

#### 2015-18 MUSTANG\*\* S2045

Double adjustable steel coil-over strut - Drag Racing only.....\$499 ea.

#### **1982-92 CAMARO/FIREBIRD S2061**

Double adjustable steel coil-over strut - Drag Racing only......\$499 ea.

#### **2010-15 CAMARO** \$2063

Double adjustable steel coil-over strut - Drag Racing only .....\$499 ea.

- \* For 1994-2004 applications that have been lowered 1"
- \*\* Body does not have sway bar mounts Call before ordering if required

All struts above include spring seat bearings

14" springs are not included but are available separately









- Forged aluminum body liquid penetrant inspected to ensure quality
- Lightened 17-4 stainless steel spindles
- Custom valving available
- Large & fully ground strut shaft
- · Stud mount or Eye mount
- Externally adjustable for extension
- Available in double externally adjustable for extension and compression
- Packages offer three brake kit options

forged aluminum struts are for Drag Racing only.

- Choice of Hyperco springs
- Includes chrome-moly lower control arm kit Choice of 1/2" or 7/16" 4130 rod ends



**STRANGE FORGED ALUMINUM STRUT PACKAGES:** Provides the basis for a lightweight front suspension. Frame construction is much simpler, suspension geometry is more easily established, and header clearance is improved over conventional A-frame suspension. Every Strange strut is externally adjustable for extension (rebound) for more convenient tuning. Strange double adjustable strut packages provide an additional external adjustment for compression (bump). Strange aluminum strut bodies are forged from 2000 series aluminum alloy to provide high strength at a minimal weight. Heat treated 17-4 stainless steel spindles provide an exceptionally strong wheel mounting surface. Fatigue resistant steel steering arms can be formed easily to obtain proper steering geometry. Brake mounting bosses are an integral part of the forged housing, providing simplicity for brake kit mounting on either side of the strut. Every Strange strut package features integral designed components ensuring proper fit, ease of assembly, maximum performance and an unsurpassed regard for safety. All Strange

**GT STRUT PACKAGE:** Designed with the cooperation of F.J. Smith Race Cars to create a package that met NHRA's SS/GT stringent criteria. This 6.5" stroke strut has been further utilized by innovative chassis builders seeking a competitive advantage in other classes. Custom Mustangs, Camaros, Imports, and other Drag Racing vehicles have enjoyed the benefits offered by this strut. The GT strut is an extremely versatile drag racing strut system. Custom configurations can include custom dimensions, custom valving and custom stroke. Also offered in double adjustable for external adjustment of compression and extension, the GT Strut becomes an unsurpassed suspension option. GT struts are supplied with choice of lower control arm end. A weld end with bearing, if a factory lower control is used, or our traditional end for construction of an A-Arm system. To complete A-Arm construction, either the S3420 or S3421 tubing and rod end kit would be required.

**LIGHTWEIGHT STRUT PACKAGE:** Designed for spindle mount wheels. The brake kit uses single piston calipers and 10" slotted steel rotors to fit within the tight clearances available. Due to the limited braking, they should only be used in vehicles weighing less than 2,600 lbs that deploy a parachute.

**MEDIUM DUTY STRUT PACKAGE:** Designed for a vehicle using 5 lug bolt-on wheels and weighs less than 2,600 lbs. The brake kit includes billet aluminum wheel hubs, bearings, races, seals, studs, caliper mounts, 2-piston calipers, soft metallic pads, and 11.25" rotors.

**HEAVY DUTY STRUT PACKAGE:** Fits 5 lug bolt-on wheels and used on race cars weighing more than 2,600 lbs. The brake kit features billet aluminum wheel hubs, bearings, races, seals, studs, caliper mounts, 4-piston calipers, soft metallic pads, and 11.25" rotors.

#### **LIGHTWEIGHT ALUMINUM STRUT PACKAGES**

#### 

PSS100DBL PSS100 package with double externally adjustable struts .......\$2,200

#### STRANGE STUD MOUNT LIGHTWEIGHT STRUT PACKAGE PSS105

PSS105DBL PSS105 package with double externally adjustable struts ......\$2,200

STRANGE STUD MOUNT LIGHTWEIGHT GT STRUT PACKAGE PSS305


Includes GT single externally adjustable stud mount struts, lower control arm ends, and L/W spindle mount brake kit- 14" springs, LCA tubing, & rod ends are not included .... \$2,540

All above packages do not include wheel bearings, races, or seals Use spindle mount wheels designed specifically for Strange spindle dimensions

Single adjustable struts control extension forces only

Double adjustable have individual adjusters to alter extension and compression



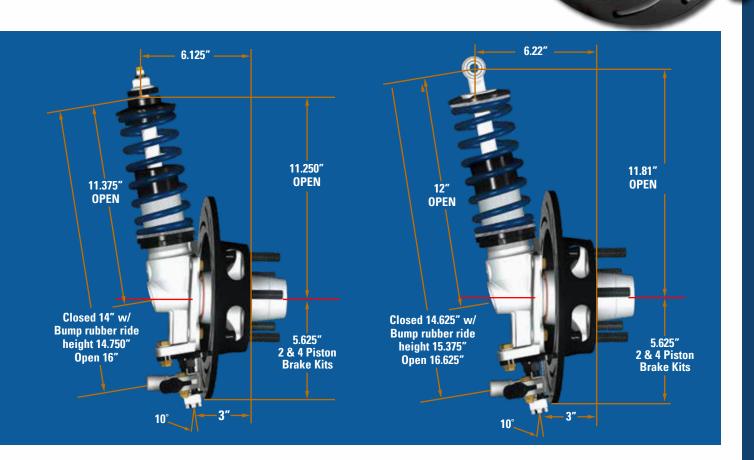

### **MEDIUM DUTY**



**PSS125** 

### **HEAVY DUTY**

#### **EYE MOUNT HEAVY DUTY STRUT PACKAGE PSS120**

Includes single externally adjustable eye mount struts, lower control arm kit, Heavy Duty brake kit, Hyperco springs and spring seat bearing kit .......\$1,950

PSS120DBL PSS120 package with double externally adjustable struts ............ \$2,350

### STUD MOUNT HEAVY DUTY STRUT PACKAGE PSS125

Includes single externally adjustable stud mount struts, lower control arm kit, Heavy Duty brake kit, Hyperco springs and spring seat bearing kit .......\$1,950

PSS125DBL PSS125 package with double externally adjustable struts ............ \$2,350

#### STUD MOUNT HEAVY DUTY GT STRUT PACKAGE PSS325

PSS325DBL PSS325 package with double externally adjustable struts .......\$3,160





#### **ULTRA STRUT PACKAGES**

#### **ULTRA STRUT PACKAGES**

- Based on Anglia style spindles
- Includes wheel bearings, races, & seals
- · Aluminum steering arms
- · Lightweight Stainless steel bases
- NAS hardware
- Superior stability
- · Externally adjustable for extension
- · Available in double externally adjustable for extension and compression
- · Choice of Hyperco springs
- Includes chrome-moly lower control arm kit Choice of 1/2" or 7/16" 4130 rod ends



**ULTRA STRUT PACKAGES:** The innovative stainless steel base assembly allows for the construction of a lighter strut, while offering unmatched integral strength. The externally adjustable cartridge features a piston located below spindle centerline. This provides a longer stroke, less stress, and increased stability. The provided NAS hardware ensures vital components remain secure. The design of the aluminum steering arm permits an ideal trapezoid linkage to create the proper Ackerman steering geometry. The asymmetry in the geometry improves handling as the wheels are steered left or right The Ultra Strut features a wide range of adjustment to meet the requirements of the vast majority of vehicles. If required, it can be re-valved to a different range of adjustment to suit your needs. The versatility of the double adjustable strut permits the ultimate in fine tuning of the front suspension. Hyperco springs, included with every Ultra Strut package, offer the advantage of lighter spring rates without the risk of coil bind.

### SINGLE ADJUSTABLE ULTRA STRUTS WITH STEEL BRAKES PSS200 Single adjustable Ultra struta laws and by life 1 AV start printing the life Universe and a second partial and by life 1 AV start printing the life Universe and a second partial and by life 1 AV start printing the life Universe and a second partial and by life Universe and a second partial and by life 1 AV start printing the life Universe and a second partial and by life 1 AV start printing the life Universe and a second partial and by life 1 AV start printing the life 1 AV s

#### **DOUBLE ADJUSTABLE ULTRA STRUTS WITH STEEL BRAKES** PSS205

Double adjustable Ultra struts, lower control arm kit, L/W steel spindle mount brake kit, Hyperco springs, & spring seat bearing kit ....... \$3,675

#### SINGLE ADJUSTABLE ULTRA STRUTS WITH CARBON BRAKES PSS210

#### **DOUBLE ADJUSTABLE ULTRA STRUTS WITH CARBON BRAKES** PSS215

			A		8888	В	99998
Stroke	Spring Length	Extended	At Ride Height	Compressed	Extended	At Ride Height	Compressed
2.50"	7"	9.40"	7.90"	6.90"	5.17"	4.91"	4.73"
3.63"	8"	11.38"	9.20"	7.77"	5.51"	5.13"	4.89"

#### **MONOTUBE ULTRA STRUT PACKAGES**

· Mono tube design allows for a larger more responsive piston

• Digressive 48 mm piston allows user to greatly stiffen low speed extension occuring at 0 to 1 inch per second

Greatly improves control over front movement during launch

· Nitrogen charged for fluid displacement - Eliminates aeration and reduces operating temperatures

• Externally adjustable for extension & compression

Independent adjusters feature preset detent positions for repeatable settings

• Isolated circuits prevent crosstalk between adjustments

Hard anodized body tube and piston provide extended service life and resists corrosion

Aluminum steering arms / NAS hardware / Choice of Hyperco springs

• Includes chrome-moly lower control arm kit - Choice of 1/2" or 7/16" 4130 rod ends



the most demanding Pro and Sportsman racers, the mono tube design permits a larger piston that is more capable of controlling low speed stiffness. This enables the strut to be adjusted very tight on launch, while remaining compliant as the vehicle encounters bumps on the track. The compression and extension are completely independent circuits preventing one from affecting the other. The needle & jet arrangement provide instant fluid control eliminating cycle lag. Preset positive detents ensure repeatable settings without any guess work.

**ALTERNATIVE TO SPINDLE MOUNT SYSTEMS:** The persuit of lightweight low drag carbon brakes with exceptional cold holding capabilities has led to the development of a compact 4-piston hub mount system. Coupled with Weld® 15"  $\times$  3.5" 4 1/2" BC wheels with 2.25" backspace, the C4700WC brake kit delivers on all of these concerns. See page 147 for further information.

#### MONOTUBE ULTRA STRUTS WITH STEEL BRAKES PSS205-M


#### MONOTUBE ULTRA STRUTS WITH CARBON BRAKES PSS215-M

#### MONOTUBE ULTRA STRUTS WITH CARBON BRAKES PSS215-M

Double adjustable MONO TUBE Ultra struts, lower control arm kit, C4700WC carbon hub mount brake kit, Hyperco springs & spring seat bearing kit ... \$6,985 (This kit doesn't contain hub bearings, races or seals)




PSS225-M

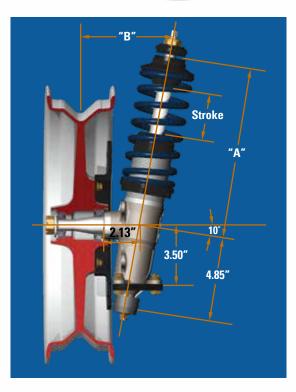

### **ALTERED ULTRA STRUT PACKAGE**

**STRANGE ALTERED ULTRA STRUT:** Compact strut specifically designed for altered and dragster applications. The Altered Ultra is ideal for assisting weight transfer and adapting to less than perfect track conditions. Brake tabs are installed to accept Strange Lightweight spindle mount brake kits. Brake kits are available separately.

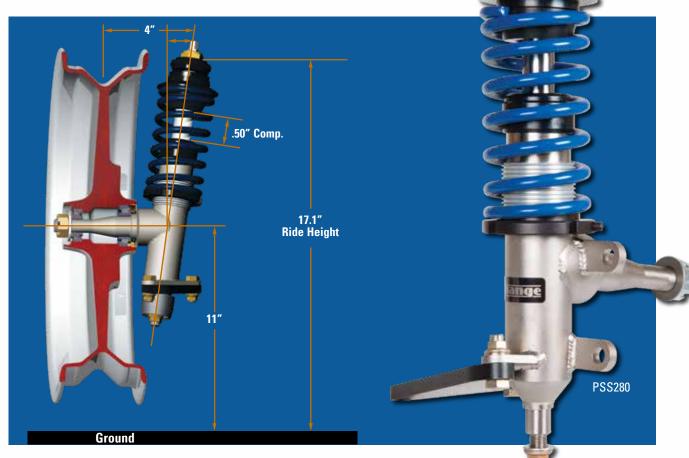

#### STRANGE SINGLE ADJUSTABLE ALTERED ULTRA STRUT PACKAGE PSS280

Includes single adjustable stud mount Altered Ultra struts, lower control arm kit, springs and spring seat bearing kit ... \$1,785



### **HYPERCOIL & KNIGHT SPRINGS**

**HYPERGO SPRINGS:** Cold wound from preheat treated SAE 9254 chrome silicon wire. Optimum wire diameter is selected for the individual design without compromise. After coiling, the closed ends are ground, and the spring is thermally stress relieved, preset and shot-peened. Completed springs are magnafluxed, inspected, deep blue epoxy powder coated and checked for dimensions, trueness and rate. Hyperco then tests each coil for actual rate and etches the rate permanently into the spring. Hyperco strict manufacturing tolerances assure the racer of springs within a tolerance range of +/- 2%- most being within 1%! (Part numbers shown below are for pair of Hyperco springs)

Part Number	Spring Rate	Length	Length At Coil Bind	Deflec- tion	Weight Per Spring	Part Number	Spring Rate	Length	Length At Coil Bind	Deflec- tion	Weight Per Spring
SP70175	175	7"	1.803"	5.197"	1.25 lbs	SP12162	162	12"	3.494"	8.506"	2.95 lbs
SP70200	200	7"	1.938"	5.062"	1.45 lbs	SP12175	175	12"	3.523"	8.477"	3.00 lbs
SP70250	250	7"	2.166"	4.834"	1.55 lbs	SP12185	185	12"	3.597"	8.403"	3.10 lbs
SP70300	300	7"	2.405"	4.595"	1.80 lbs	SP12200	200	12"	3.687"	8.313"	3.80 lbs
SP70500	500	7"	2.765"	4.235"	2.35 lbs	SP12225	225	12"	3.867"	8.133"	3.60 lbs
SP80200	200	8"	2.269"	5.731"	1.70 lbs	SP12375	375	12"	4.634"	7.366"	5.05 lbs
SP80225	225	8"	2.353"	5.647"	1.85 lbs	SP12400	400	12"	4.670"	7.330"	5.10 lbs
SP80250	250	8"	2.452"	5.548"	2.10 lbs	SP12425	425	12"	4.956"	7.044"	5.85 lbs
SP80275	275	8"	2.622"	5.378"	2.30 lbs	SP12450	450	12"	4.857"	7.143"	5.85 lbs
SP80300	300	8"	2.563"	5.437"	2.35 lbs	SP12550	550	12"	5.026"	6.974"	6.60 lbs
SP80325	325	8"	2.652"	5.348"	2.40 lbs	SP12600	600	12"	5.376"	6.624"	6.70 lbs
SP80350	350	8"	2.733"	5.267"	2.55 lbs	SP12650	650	12"	5.710"	6.290"	6.80 lbs
SP80375	375	8"	2.853"	5.147"	2.60 lbs	SP14085	85	14"	3.718"	10.282"	2.65 lb:
SP80400	400	8"	2.910"	5.090"	2.80 lbs	SP14100	100	14"	3.457"	10.543"	2.60 lbs
SP80550	550	8"	3.364"	4.636"	3.10 lbs	SP14110	110	14"	3.705"	10.295"	2.70 lbs
SP10125	125	10"	2.498"	7.502"	1.75 lbs	SP14125	125	14"	3.736"	10.264"	3.10 lb:
SP10225	225	10"	3.125"	6.875"	2.65 lbs	SP14138	138	14"	4.012"	9.988"	3.25 lb
SP10250	250	10"	3.214"	6.786"	3.00 lbs	SP14150	150	14"	4.230"	9.770"	3.55 lb
SP10300	300	10"	3.409"	6.591"	3.35 lbs	SP14160	160	14"	4.053"	9.947"	3.90 lb
SP10325	325	10"	3.496"	6.504"	3.45 lbs	SP14175	175	14"	4.324"	9.676"	3.80 lb:
SP10350	350	10"	3.603"	6.397"	3.45 lbs	SP14185	185	14"	4.484"	9.516"	4.20 lb:
SP10375	375	10"	3.731"	6.269"	3.90 lbs	SP14200	200	14"	4.607"	9.393"	4.35 lb
SP10400	400	10"	3.709"	6.291"	3.75 lbs	SP14225	225	14"	4.777"	9.223"	4.90 lb:
SP10425	425	10"	3.781"	6.219"	3.90 lbs	SP14250	250	14"	4.857"	9.143"	4.95 lb:
SP10550	550	10"	4.131"	5.869"	4.95 lbs	SP14275	275	14"	5.049"	8.951"	5.30 lb:
SP12085	85	12"	2.764"	9.236"	1.95 lbs	SP14300	300	14"	5.243"	8.757"	5.80 lb:
SP12095	95	12"	2.803"	9.197"	2.00 lbs	SP14325	325	14"	5.372"	8.628"	5.95 lb
SP12110	110	12"	2.954"	9.046"	2.25 lbs	SP14350	350	14"	5.205"	8.795"	7.00 lb
SP12125	125	12"	3.160"	8.840"	2.35 lbs	SP16125	125	16"	3.819"	12.181"	4.80 lb
SP12150	150	12"	3.392"	8.608"	2.80 lbs						

7", 8",10",12" & 14" Hyperco Springs \$130 Pair

16" Hyperco Springs \$140 Pair

(Part numbers shown are for pair of Knight springs)

Part Number	Spring Rate	Length
SPK1295	95	12"
SPK12110	110	12"
SPK12130	130	12"
SPK12150	150	12"
SPK12175	175	12"
SPK12200	200	12"
SPK14150	150	14"

- All Shafts Feature Seamless Heat Treated Chrome-moly Tubing
  - 3" or 3 1/2" OD Tubing
  - Strange Forged Chrome-moly or Spicer HD Weld Ends
  - · Solid (non-crossdrilled) Spicer 1350 or 1480 U-Joints
    - Total Run-Out Less Than .008"
      - Electronically Balanced

STRANGE TUBULAR DRIVESHAFTS: Constructed from seamless heat treated chrome-moly tubing. The .083" wall thickness tubing is offered in both 3" OD and 3 1/2" OD to suit various applications. Custom designed fixtures ensure the 1350 or 1480 series weld-ends are properly phased to eliminate driveline vibrations. The U1699 driveshaft is MIG welded and utilizes Spicer HD 1350 series weld ends and solid (non-crossdrilled) u-joints. All other shafts are TIG welded and feature Strange HD forged chrome-moly weld ends and Spicer HD solid u-joints. Every shaft is electronically balanced with a total run-out of less than .008". Strange offers a complete line of transmission yokes, rear end yokes, and u-bolt kits to complete your custom driveshaft.

**3" OR 3 1/2" DRIVESHAFT:** Determined by driveshaft length and peak RPM. Critical speed is the point in which the driveshaft will begin to distort, vibrate, and eventually fail. Once measurements have been taken, consult a Strange Sales Associate to discuss the proper driveshaft diameter to order.

**MEASUREMENTS:** Should be taken on level ground, full weight on all four tires, vehicle at ride height, and pinion angle set. If the rear yoke is smaller than a 1350 series, it may be the time to replace it before proceeding. The driveline is only as strong as the weakest link and a new yoke will change your measurement.

## DRIVESHAFT INCLUDING TRANSMISSION YOKE:

If you have a 1350 series yoke on the rear, only the "A" and "B" measurements are required. If you do not, also supply the "D" and "E" of the rear u-joint.\* (See diagram on next page)

#### **DRIVESHAFT ONLY - NO TRANSMISSION YOKE:**


Push the transmission yoke all the way in until it bottoms, pull it out 7/8" and measure center to center. This is the "C" dimension. If you are not using all 1350 series yokes, supply the "D" and "E" from any that are not and note which end they belong.\* Your transmission yoke will need to be sent-in to properly balance the driveshaft. (See diagram on next page)

\* This situation will require use of a conversion u-joint.

These are crossdrilled which will reduce overall driveline strength.





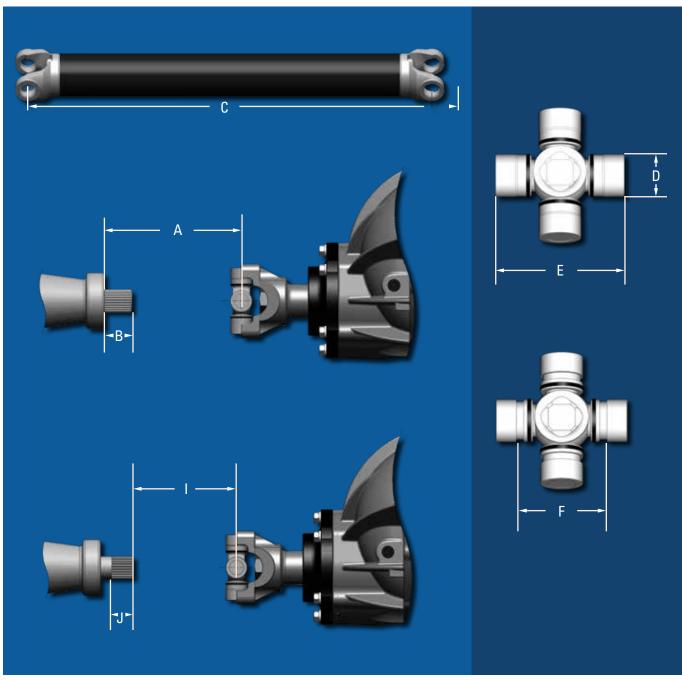

## **DRIVESHAFTS & YOKES**

### **DRIVESHAFTS**

U1699	3" seamless chrome-moly driveshaft / Spicer HD 1350 weld ends / Spicer HD 1350 non-crossdrilled u-joints
U1702*	3" seamless chrome-moly driveshaft / Strange HD chrome-moly 1350 weld ends / Spicer HD 1350 non-crossdrilled u-joints \$349
U1704*	3 1/2" seamless chrome-moly driveshaft / Strange chrome-moly 1350 weld ends / Spicer HD 1350 non-crossdrilled u-joints \$449
U1706*	3 1/2" seamless chrome-moly driveshaft / Strange chrome-moly 1480 weld ends / Spicer HD 1480 non-crossdrilled u-joints \$579

<sup>\*</sup> Available with SFI certification sticker for an additional \$18

## **DRIVESHAFT COMPONENTS**

U1670	Spicer HD 1350 series weld yoke for 3" .083" wall tubing	\$25
U1672	Strange forged chrome-moly 1350 series weld yoke for 3" .083" wall tubing	\$65
U1673	Strange forged chrome-moly 1350 series weld yoke for 3 1/2" .083" wall tubing	
U1674	Strange forged chrome-moly 1480 series weld yoke for 3 1/2" .083" wall tubing	
U1675	Spicer 1330 series weld yoke for 3" .083" wall tubing	
U1676	Spicer 1310 series weld yoke for 3" .083" wall tubing	
U1700T	3" x .083" wall seamless chrome-moly tubing- 5 ft piece	
U1703T	3 1/2" x .083" wall seamless chrome-moly tubing- 5 ft piece	
U1641	Spicer 1350 series u-joint- non-crossdrilled- D=1.187" / E=3.625"	
U1639	Spicer 1480 series u-joint- non-crossdrilled- D=1.375" / E=4.188"	
U1642	1330 series crossdrilled u-joint- D=1.062" / E=3.625"	\$19
U1643	1310 series crossdrilled u-joint- D=1.062" / E=3.218"	\$19
U1645	P55 55 675- D=1.125 / F=2.645" to 1350 crossdrilled conversion u-joint	\$32
U1646	1310 to 1350 crossdrilled conversion u-joint	\$32
U1647	1330- D=1.062" / E=3.625" to 1350 crossdrilled conversion u-joint	\$35
U1648	1330- D=1.125" / E=3.625" to 1350 crossdrilled conversion u-joint	\$35
U1610	U-bolts for 1350 series yoke- pair	\$12
U1610HD	Billet cap kit for Strange 1350 series yokes- pair	\$85
U1611	U-bolts for 1480 series yoke- pair	\$25
U1611HD	Billet cap kit for Strange 1480 series yokes- pair	\$100





### **TRANSMISSION YOKES**

U1658	Ford C4, T5, Tremec 3550, & AOD 28 spline / 1350 series / Strange HD / G=5.81" / H=1.498" \$80
U1668	Ford C4, T5, Tremec 3550, & AOD 28 spline / 1350 series / Strange chrome-moly / G=5.81" / H=1.498" \$179
U1659	Ford C6, T45, Top Loader, & FMX 31 spline / 1350 series / Strange HD / G=6.06" / H=1.684"\$80
U1669	Ford C6, T45, Top Loader, & FMX 31 spline / 1350 series / Strange chrome-moly / G=6.06" / H=1.684" \$179
U1661	GM Powerglide, TH350, T56, 4L60, 4L60E, Muncie, & 1st design Super T-10 27 spline / 1310 series / Spicer / G=5.50" / H=1.500"\$57
U1662	GM Powerglide, TH350, T56, 4L60, 4L60E, Muncie, & 1st design Super T-10 27 spline / 1350 series / Strange HD / G=5.50" / H=1.503"\$80



TRANS	SMISSION YOKES
U1667	GM Powerglide, TH350, T56, 4L60, 4L60E, Muncie, & 1st design Super T-10 27 spline / 1350 series / Strange chrome-moly / G=5.50" / H=1.503"\$179
U1667N	U1667 modified to use with roller bearing extension housing 27 spline / 1350 series / Strange chrome-moly / G=5.50" / H=1.499"\$196
U1677	Same specifications as U1667 - Features removable chrome-moly caps
U1677N	U1677 modified to use with roller bearing extension housing 27 spline / 1350 series / Strange chrome-moly / G=5.50" / H=1.499"\$204
U1650	GM TH400, 4L80E, & 2nd design Super T-10 32 spline / 1350 series / Spicer HD / G=5.50" / H=1.885"\$80
U1664	GM TH400, 4L80E, & 2nd design Super T-10 32 spline / 1350 series / Strange chrome-moly / G=5.50" / H=1.885"\$179
U1664N	U1664 modified to use with roller bearing extension housing 32 spline / 1350 series / Strange chrome-moly / G=5.50" / H=1.888"
U1678	Same specifications as U1664 - Features removable chrome-moly caps \$285
U1678N	U1678 modified to use with roller bearing extension housing 32 spline / 1350 series / Strange chrome-moly / G=5.50" / H=1.888"\$299
U1684TH	GM TH400 for roller bearing extension housing only 32 spline / 1480 series / Strange chrome-moly / G=5.50" / H=1.888"\$295
U1684	G-Force & Liberty 32 spline / 1480 series / Strange chrome-moly / G=5.50" / H=1.888"\$295
U1651	Lenco 16 spline / 1350 series / Spicer HD / G=4.63" / H=1.812"\$105
U1665	Lenco 16 spline / 1350 series / Strange chrome-moly / G=4.00" / H=1.900"\$198
U1663	Lenco 32 spline / 1350 series / Strange chrome-moly / G=4.00" / H=1.812"\$182
U1683	Lenco 32 spline / 1480 series / Strange chrome-moly / G=4.00" / H=1.802"\$295
U1655	Mopar, Doug Nash, & Liberty 30 spline / 1350 series / Strange HD / G=6.062" / H=1.680"\$80
U1666	Mopar, Doug Nash, & Liberty 30 spline / 1350 series / Strange chrome-moly / G=6.06" / H=1.6795"\$179



DANA	60 / MOPAR 8 3/4"	
U1598	Dana 60 / 29 spline / 1350 series Strange chrome-moly / G=3.500" / H=1.875"	\$142
U1600	Dana 60 / 29 spline / 1350 series Strange HD / G=3.00" / H=1.875"	\$90
U1607	Mopar 8 3/4" / 742 case / 10 spline / 1350 series Strange HD / G=3.375" / H=1.875"	\$90
U1608	Mopar 8 3/4" / 489 case / 29 spline / 1350 series Strange HD / G=3.375" / H=1.875"	\$90

### FORD 9" / FORD 8.8"

U1603	Ford 9" / 28 spline / 1350 series Strange chrome-moly / 2.80 lbs / G=4.063" / H=1.812" \$125
U1603P	U1603 polished and chrome plated\$195
U1603B	Ford 9" / 28 spline / 1350 series Strange billet chrome-moly / 2.50 lbs / G=4.063" / H=1.812" \$280
U1604	Ford 9" / 35 spline / 1350 series Strange chrome-moly / 2.86 lbs / G=4.063" / H=2.125"
U1604P	U1604 polished and chrome plated\$195
U1604B	Ford 9" / 35 spline / 1350 series Strange billet chrome-moly / 2.60 lbs / G=4.063" / H=2.125"\$280
U1633	Ford 9" / 28 spline / 1350 series Strange aluminum / 1.00 lbs / G=3.875" / H=1.804" \$250
U1634	Ford 9" / 35 spline / 1350 series Strange aluminum / 1.00 lbs / G=3.875" / H=2.113"\$250
U2203	Ford 9" / 28 spline / 1350 series / with dust shield Strange HD / G=4.060" / H=1.812"\$90
U2203HDA	Ford 9" / 28 spline / 1350 series / with dust shield / for HD Pro support Strange HD / G=4.060" / H=1.812"\$90
U2304	Ford 9" / 35 spline / 1480 series Strange billet / 2.86 lbs / G=4.062" / H=2.125"\$280
U1596	Ford 8.8" / 30 spline / 1350 series Strange chrome-moly / G=3.150" / H=1.812"\$142
U1630	Ford 8.8" / 30 spline / 1350 series Strange HD / G=3.150" / H=1.812"\$90



### GM 12 BOLT / 10 BOLT / OLDS

U1601	Chevy 12 bolt / 30 spline / 1350 series Strange chrome-moly / G=3.150" / H=1.750"	\$142
U1602	Chevy 12 bolt / 30 spline / 1350 series Strange HD / G=2.688" / H=1.750"	\$90
U1594	Chevy 8.5 10 bolt / 30 spline / 1350 series Strange chrome-moly / G=3.375" / H=1.940"	\$142
U1605	Chevy 8.5 10 bolt / 30 spline / 1350 series Strange HD / G=3.375" / H=1.940"	\$90
U1606	57-64 Oldsmobile / 13 spline / 1350 series Strange chrome-moly / G=3.156" / H=1.937"	\$141

### SENSOR COLLARS / U-BOLTS / CAP KITS

U1613	One magnet pick-up collar for U1603 / U1633	\$48
U1613-2	Two magnet pick-up collar for U1603 / U1633	\$52
U1613-4	Four magnet pick-up collar for U1603 / U1633	\$60
U1613-8	Eight magnet pick-up collar for U1603 / U1633	\$129
U1614	One magnet pick-up collar for U1604 / U1634 / U2304	\$48
U1614-2	Two magnet pick-up collar for U1604 / U1634 / U2304	\$52
U1614-4	Four magnet pick-up collar for U1604 / U1634 / U2304	\$60
U1614-8	Eight magnet pick-up collar for U1604 / U1634 / U2304	\$129
U1617 *	One magnet pick-up collar for U1594, U1596, U1598, U1601, & U1606	\$48
U1617-2*	Two magnet pick-up collar for U1594, U1596, U1598, U1601, & U1606	\$52
U1617-4 *	Four magnet pick-up collar for U1594, U1596, U1598, U1601, & U1606	\$60
U1617-8 *	Eight magnet pick-up collar for U1594, U1596, U1598, U1601, & U1606	\$129
U1610	U-bolts for 1350 rear end yokes- pair	\$12
U1610HD	Billet chrome-moly cap kit for 1350 yokes- Strange yokes only- pair	\$85
U1611	U-bolts for 1480 rear end yokes- pair	\$25
U1611HD	Billet chrome-moly cap kit for 1480 yokes- Strange yokes only- pair	\$100
(XXXX)	\$\frac{1}{2}\frac{1}\frac{1}{2}\f	

<sup>\*</sup> Applications shown are for yokes produced after 1/1/15 - Call for more information



#### 9" / 9 1/2" TOP LOAD LIVE AXLE

- Accepts Typical 9" & 9 1/2" Gear Sets
- 11 1/2" Carbon or Steel Brakes
- 32 1/2" Wheel to Wheel Width
- Eliminates Front or Rear Access Opening that Allows Deflection
- 2" OD One Piece Axle Utilized to Stiffen Assembly
- Top Cover for Easy Access & Inspection
- Distance Between Mounting Plates 14 3/8"
- Lightweight Complete Assemblies Begin @ 145 lbs
- Oil capacity: Approximately 4 quarts

The 9" / 9 1/2" Top Load Live Axle was originally created over three decades ago for the demands of Top Fuel and Funny Cars. Today's unit has been refined for alcohol racers demanding the least amount of rear end maintenance. This model features a newly designed heavy duty aluminum center piece, accepts 9" or 9 1/2" gear sets, a redesigned aluminum spool, and supplied with 11 1/2" carbon or steel brakes. Aluminum semi finished mounting plates are available at an additional cost.



#### L4101:

Strange 9" / 9 1/2" Top Load Live Axle assembly with 11.5" carbon brake kit includes 9" pro gear - Mounting plates are not included .......\$8,540

OPRF23	Upgrade to 9 1/2" gear set\$140
OPRF31	Pinion support with built-in coupler cover\$75
OPRF51	Discount to equip with steel brakes\$2,505
E1500M	Semi finished mounting plate- each\$100
L4020	Tool kit to service 9" / 9 1/2" Top Load Live Axle \$500

#### **10 1/2" LIVE AXLE**

- 10 1/2" Ring Gear Available in 2.91 & 4.11 Ratios
- 11 1/2" Carbon or Steel Brakes
- 32 1/2" Wheel to Wheel Width
- Eliminates Front or Rear Access Opening that Allows Deflection
- 23/4" OD One Piece Axle Utilized to Stiffen Assembly
- Top Cover for Easy Access & Inspection
- L7000 200 lbs without oil L7002 214 lbs without oil
- Oil capacity: 6-7 quarts

The 10 1/2" Live Axle rear end is designed to withstand loads that can destroy many drag racing rear ends. The Strange Live axle provides superior resistance to bending loads in comparison to full floater axle assemblies. Axles in a floater assembly do not contribute to the rigidity of the rear end and place the entire load on the housing. The massive 2 3/4" OD axle shaft offers additional support against bending loads imposed on the housing. The top loading design eliminates a front or rear access opening that can allow deflection and reduced gear life. It also provides convenient complete inspection of the internal components.



#### L7000:

#### L7002:

Strange 10 1/2" Top Load Live Axle assembly with 11.5" steel brake kit includes choice of 10 1/2" pro gear-Mounting plates are not included .....\$9,350

L7000MP Semi finished mounting plate for 10 1/2" or 12

1/4" Live Axle- each.....\$130

L7020 Tool kit to service 10 1/2" Live axle ......\$250

#### **12 1/4" LIVE AXLE**

- 12 1/4" Ring Gear 3.20 Ratio
- 11 1/2" Carbon Brakes
- 32 1/2" Wheel to Wheel Width
- Eliminates Front or Rear Access Opening that Allows Deflection
- 2 3/4" OD One Piece Titanium Axle Utilized to Stiffen Assembly
- Top Cover for Easy Access & Inspection
- 198 lbs with oil
- Oil capacity: 5 quarts

The 12 1/4" Live Axle rear end is the finest rear end available for Top Fuel and Funny Car. The main housing is unique in both design and material. The top load design coupled with a one piece axle, provides an excellent structural base that maximizes gear life and significantly reduces rear end distortion. The unit features magnesium tubes, magnesium cover, titanium axle, steel spool, 11 1/2" carbon brake kit and internal oil pump.



Strange 12 1/4" Top Load Live Axle assembly with 11.5" carbon brake kit includes 3.20 pro gear - Mounting plates are not included ...........\$18,850

L7000MP Semi finished mounting plate for 10 1/2" or 12 1/4"

Live Axle- each ......\$130

L7420 Tool kit to service 12 1/4" Live axle ......\$250





### **Strange Engineering**

8300 Austin Ave., Morton Grove, IL 60053 847-663-1701 • 847-663-1702 - Fax • www.strangeeng.net